

# Londyn Semi-Flush mount

KSF1036 | 1.0

## GENERATION LIGHTING FLUSH MOUNT

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Use minimum 90°C supply conductors.**


**SAVE THESE INSTRUCTIONS!**

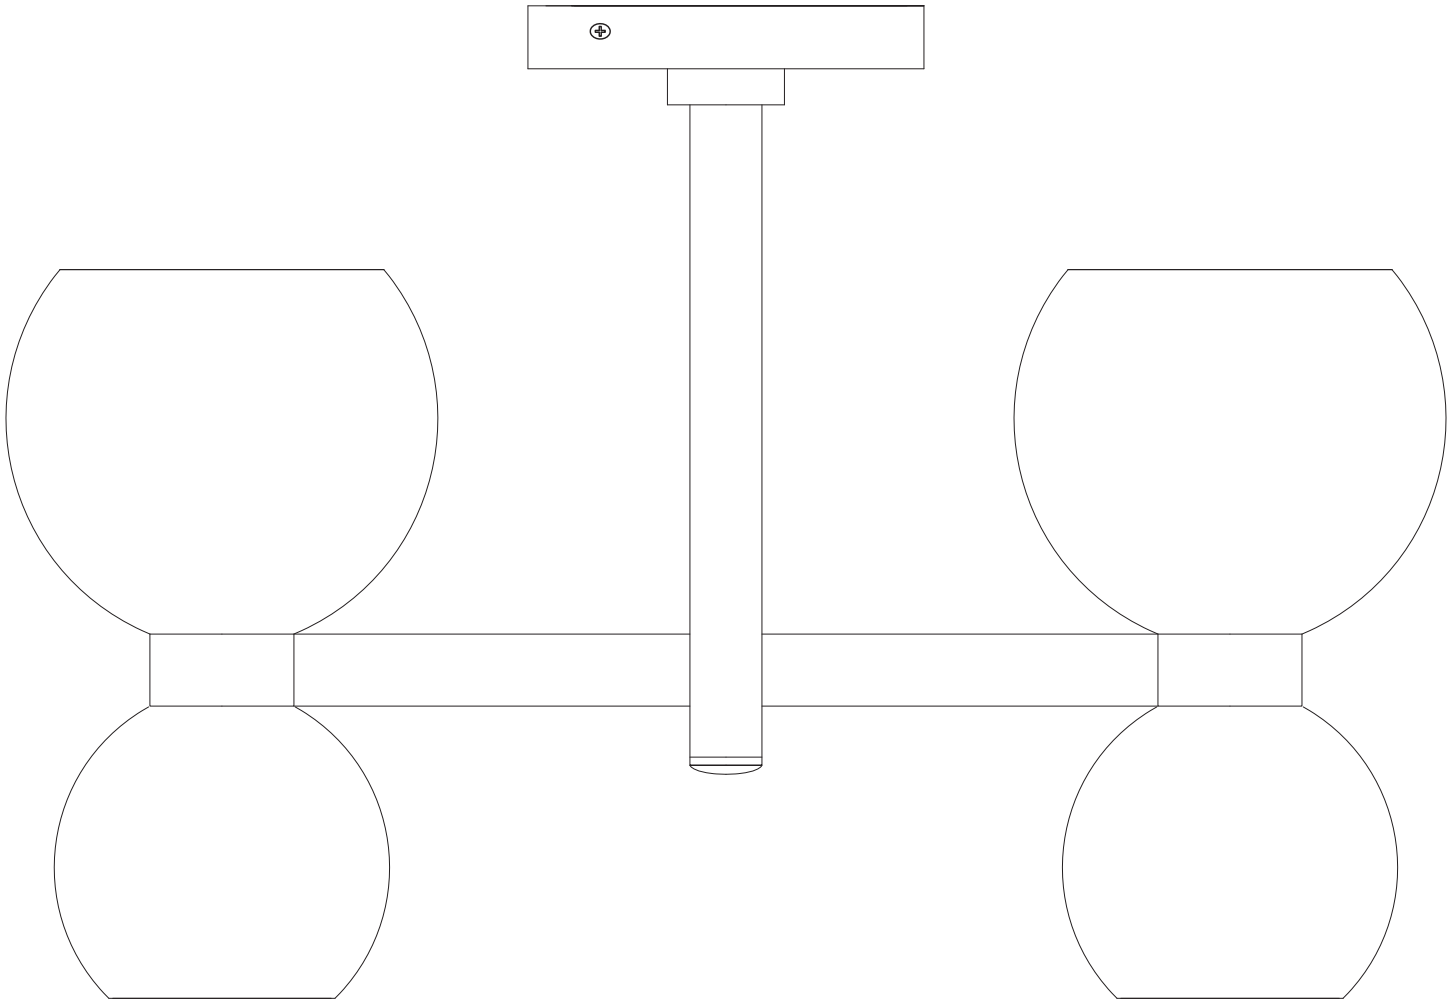

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.generationlighting.com

# Install the Fixture

IA

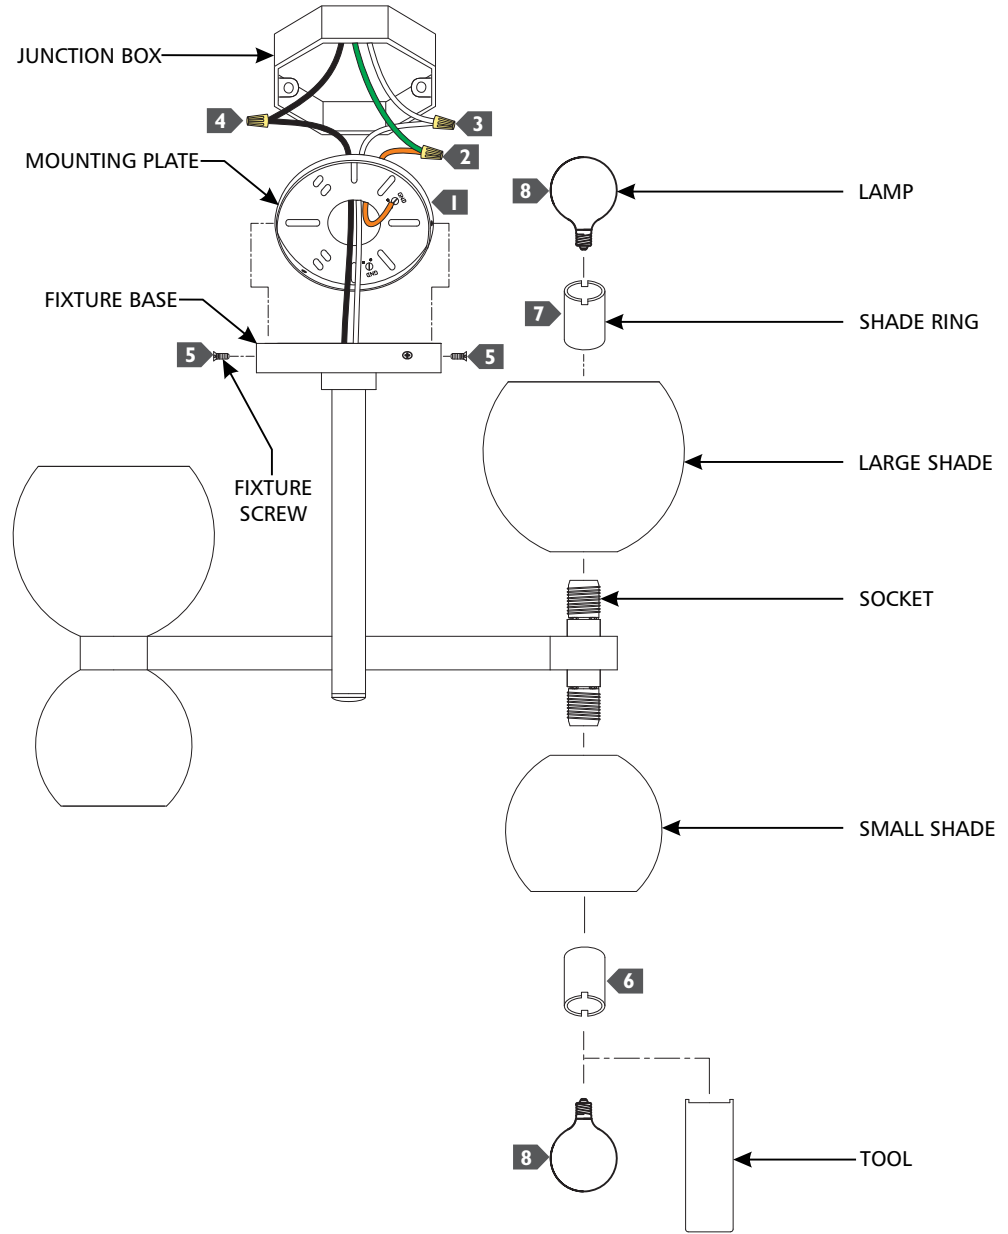

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire to the hot power line wire with a wire nut.
- 5** Neatly tuck the wiring into the junction box, place the fixture base onto the mounting plate, and secure it in place with fixture screws.
- 6** Place the small shade onto the lower socket and use the provided tool to secure it in place with a shade ring. Repeat for each small shade.
- 7** Place the large shade on to the upper socket and use the provided tool to secure it in place with a shade ring. Repeat for each large shade.
- 8** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.