


MILE 04 A,B,C



- To be installed by an electrician to an electrical box
- Use appropriate screws and anchors where necessary
- Wear enclosed gloves when handling lamp
- Handle materials with care. Please consult lamp maintenance sheet on our web site
- Should be used exclusively as a lamp and not as a shelving, display or hanging unit

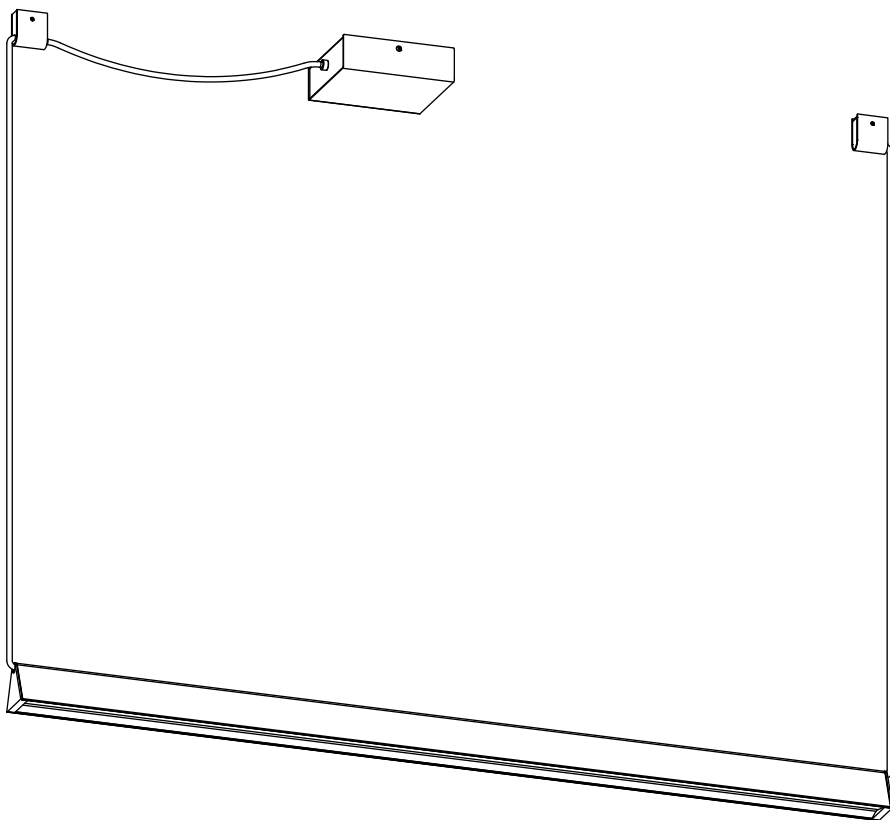

lamp weight **4-9 lbs.**



**NEVER TURN ON POWER SUPPLY
UNTIL CONNECTIONS AND
INSTALLATION ARE COMPLETED.
DOING OTHERWISE COULD BE
HARMFUL TO YOUR LUMINAIRE.**

1

Mark anchor locations


Be sure all ceiling holes are aligned.




Make sure to use appropriate anchors for ceiling material

Please note the edge of your luminaire will be 1" from your anchor hole.


1"
25 mm

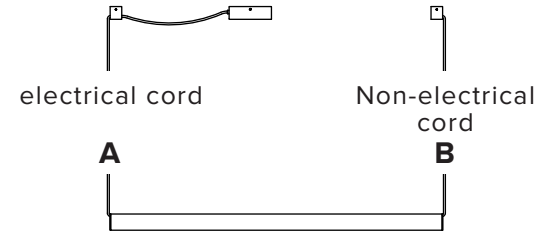


A

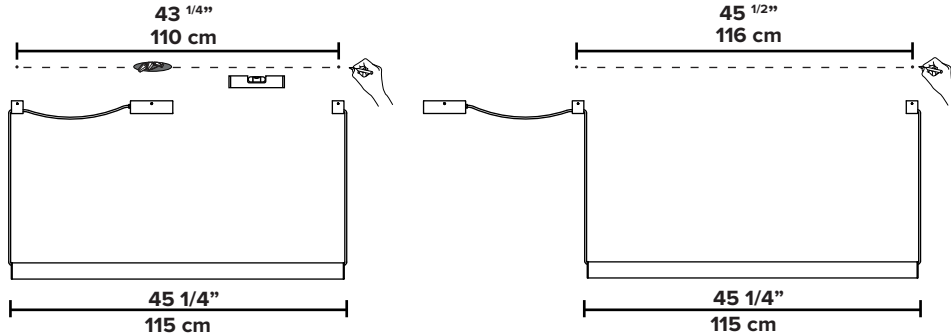

B

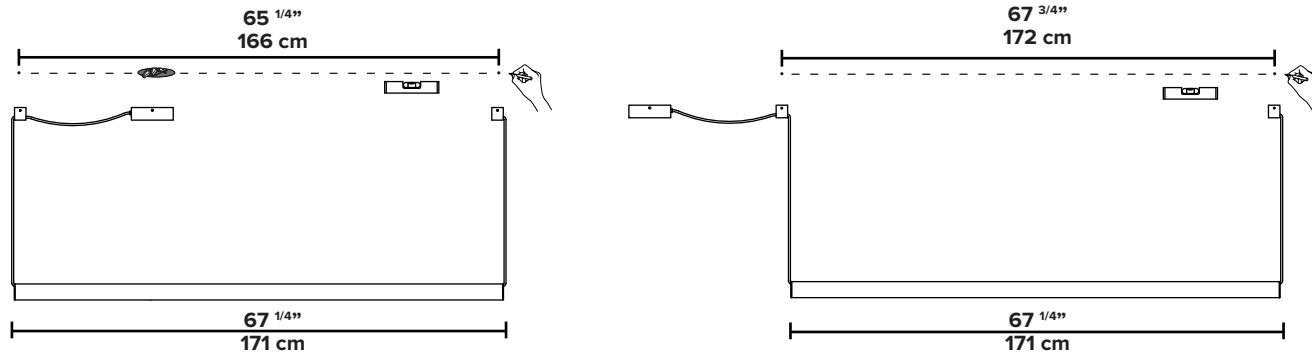




C

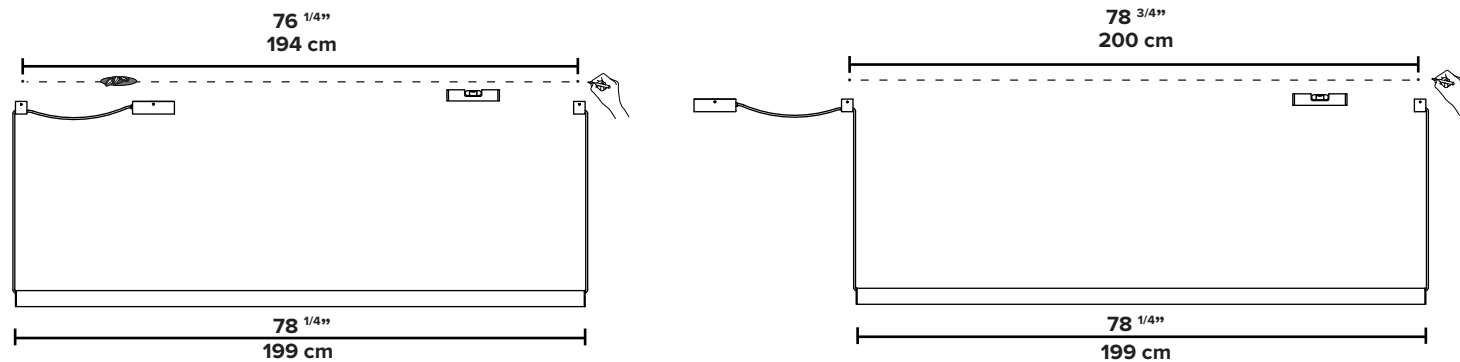


2

Mount double hole anchor with
line/main voltage cord.

Pull wires to straighten them
before mounting them.

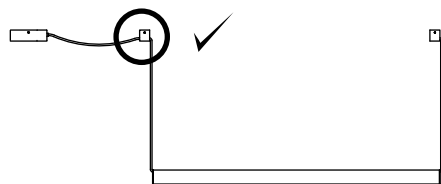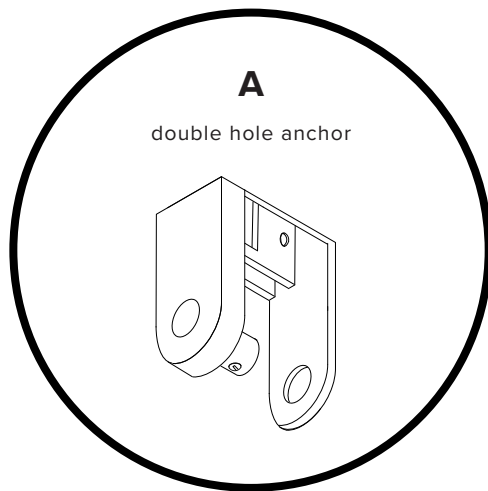

**Make sure to use appropriate
anchors for ceiling material**

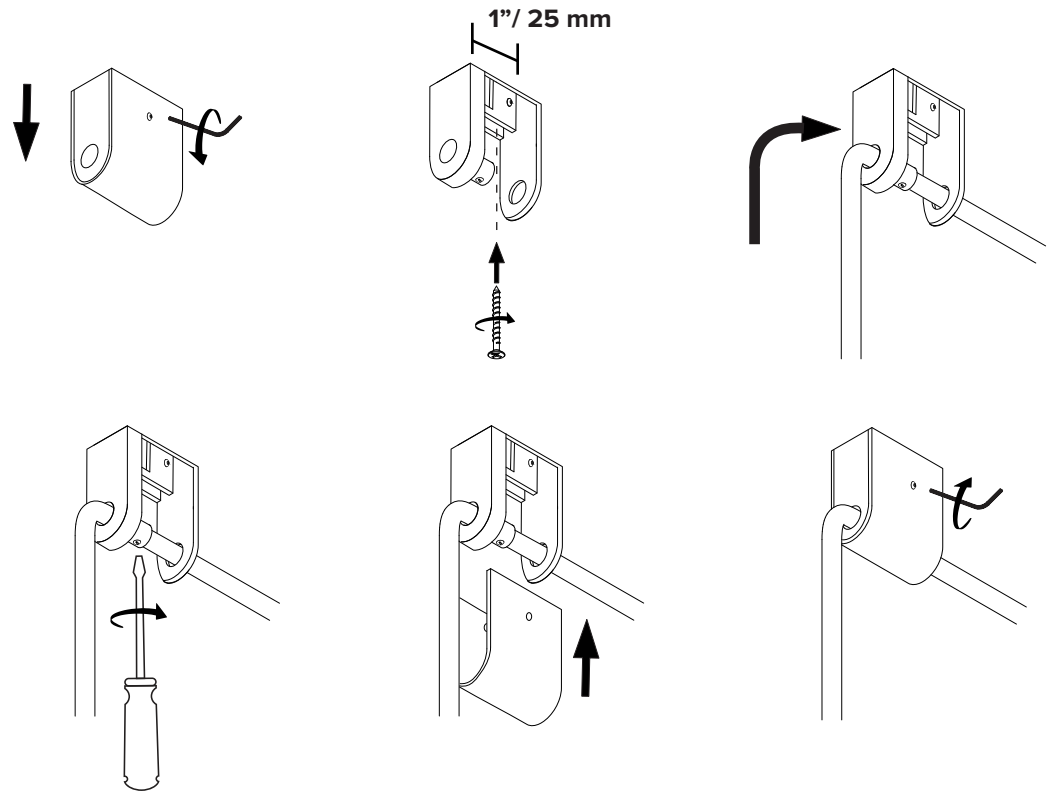

Screw gently, but firmly





3

Mount single hole anchor with
non-electrical cord.



Pull wires to straighten them
before mounting them.

B





single hole anchor



1" / 25 mm



25 mm

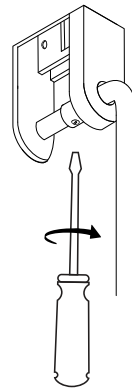


Screw gently, but firmly

INSTALL EXTENSION HARNESS TO LINE/MAIN VOLTAGE


4

Open canopy cover.
It is held in place with
2 screws.

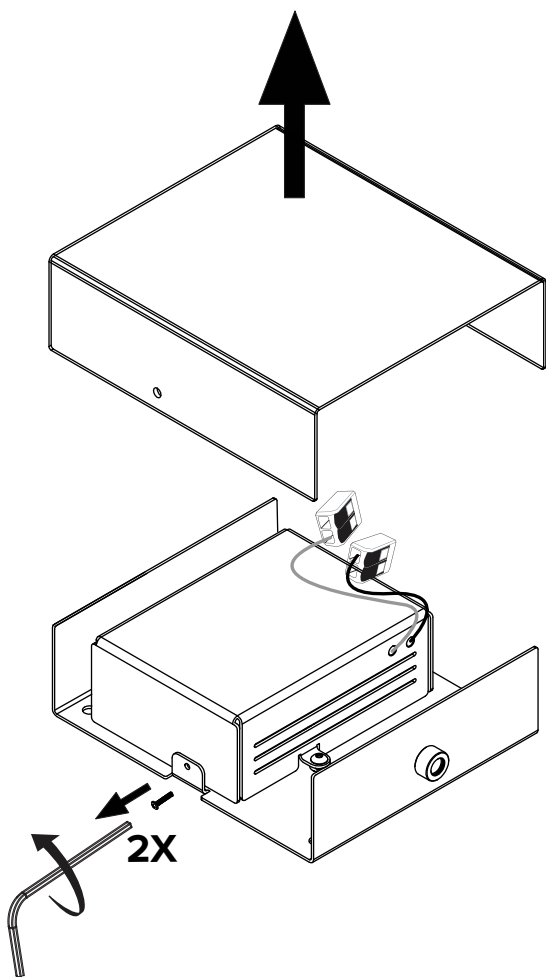

5


Unscrew provided driver
housing. It is held in
place by two screws.
Place the housing aside.

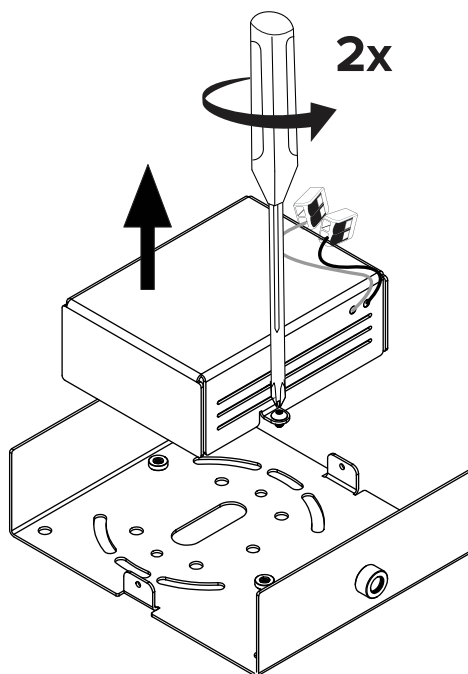


6

Connect the
extension harness to the
junction box if necessary.


The harness
is shipped with the canopy.

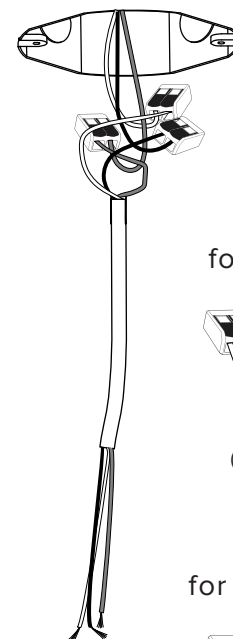

for 120 V wiring




for 220-240 V wiring




MOUNT CANOPY BRACKET

7


The canopy can either be mounted to the junction box or directly to the ceiling using appropriate holes.



Pass the extension harness through center hole of canopy.

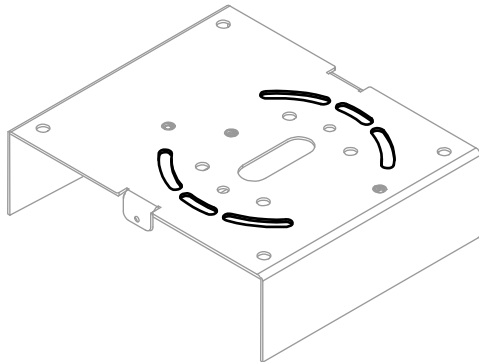


To junction box

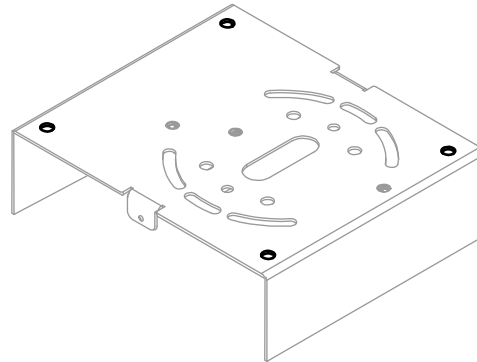

OR


directly to the ceiling
*use appropriate anchors

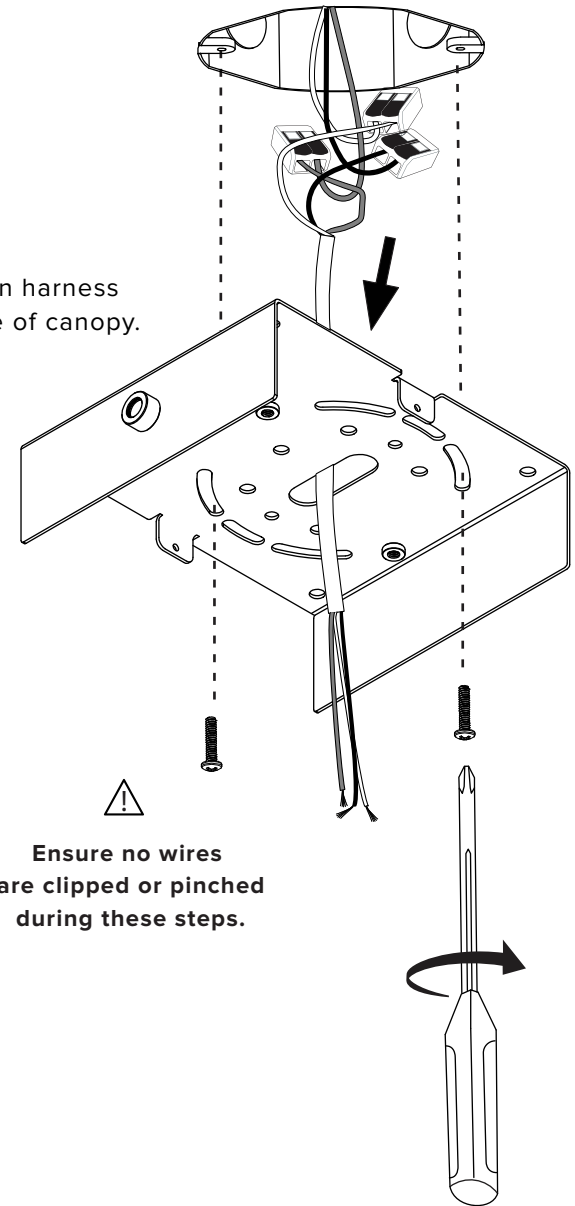

Ensure no wires
are clipped or pinched
during these steps.


CONNECT EXTENSION HARNESS (ELECTRICAL BOX) TO DRIVER'S AC INPUT WIRES

8

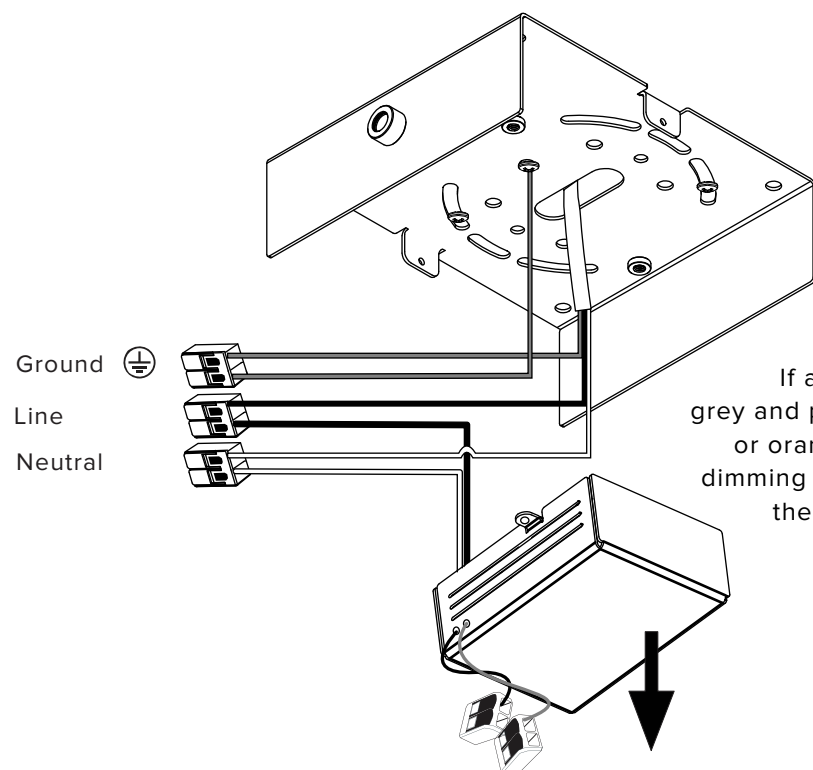


If applicable, use
grey and purple wires for 0-10V,
or orange wires for DALI
dimming circuit before closing
the driver housing.

for 120 V wiring




for 220-240 V wiring

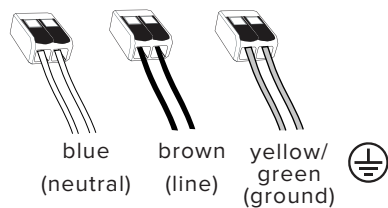

9

Carefully close
driver enclosure. It is
held by two screws.


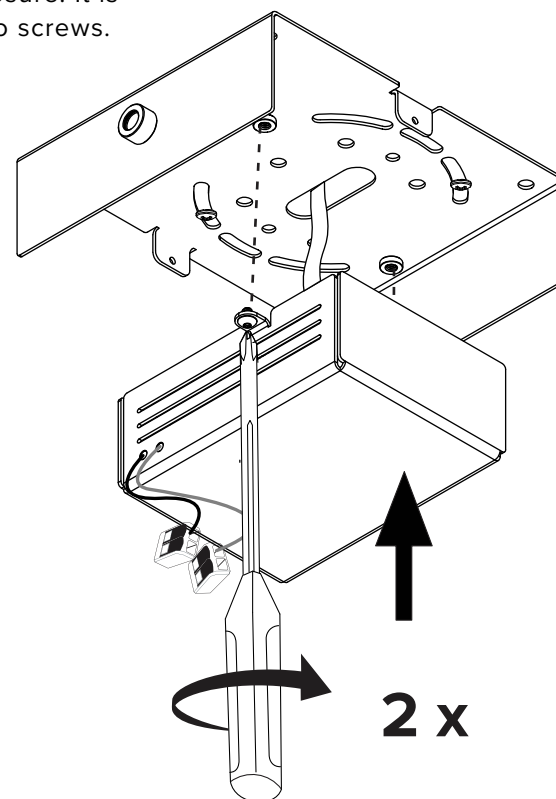


Ensure no wires
are clipped or pinched
during these steps.

11

Feed luminaire cord into the canopy strain relief.


Tighten strain relief set screw when desired cord length is reached.

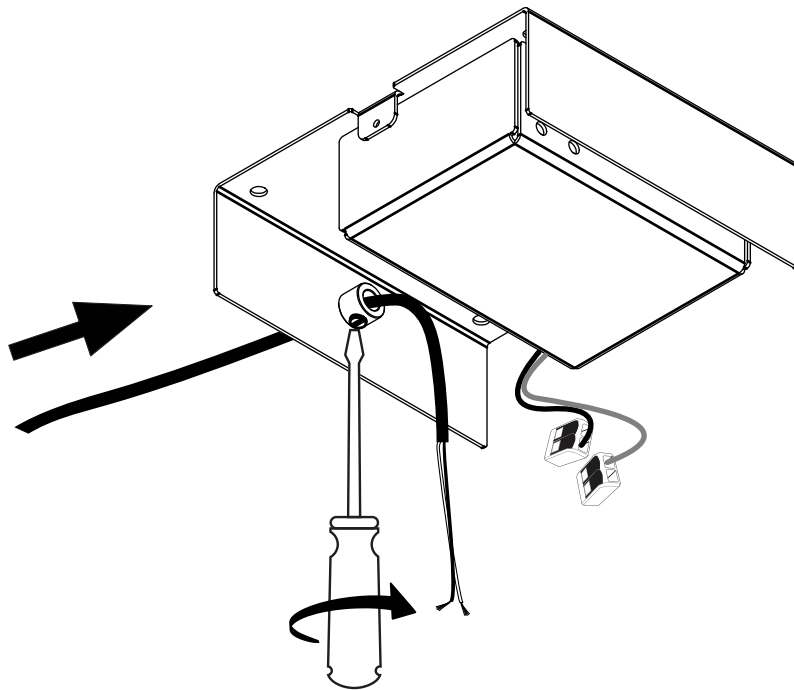

*screw gently but firmly

CONNECT LUMINAIRE CORD TO DRIVER DC WIRES

12

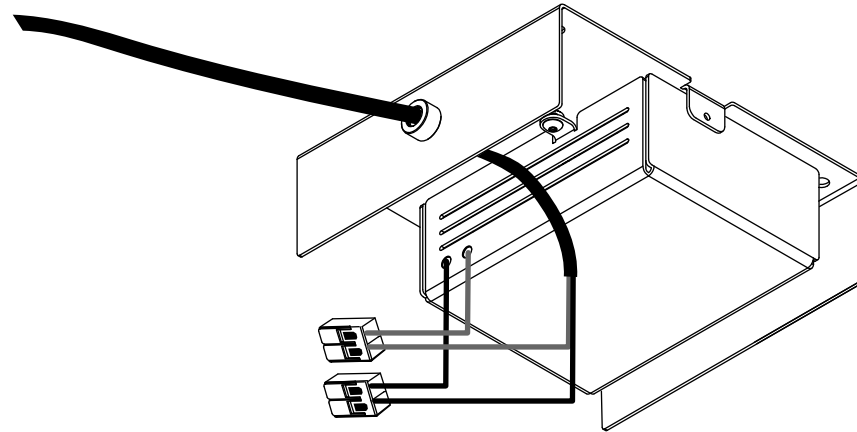


6" (153 mm)

Cut green/yellow as short as possible. It is not used in this assembly

Depending on your location, the luminaire cord will either be Blue (+) and brown (-)


or

White (+) and Black (-)



BLUE (+) BROWN (-)


OR



WHITE (+) BLACK (-)


LEVELING THE LUMINAIRE

13

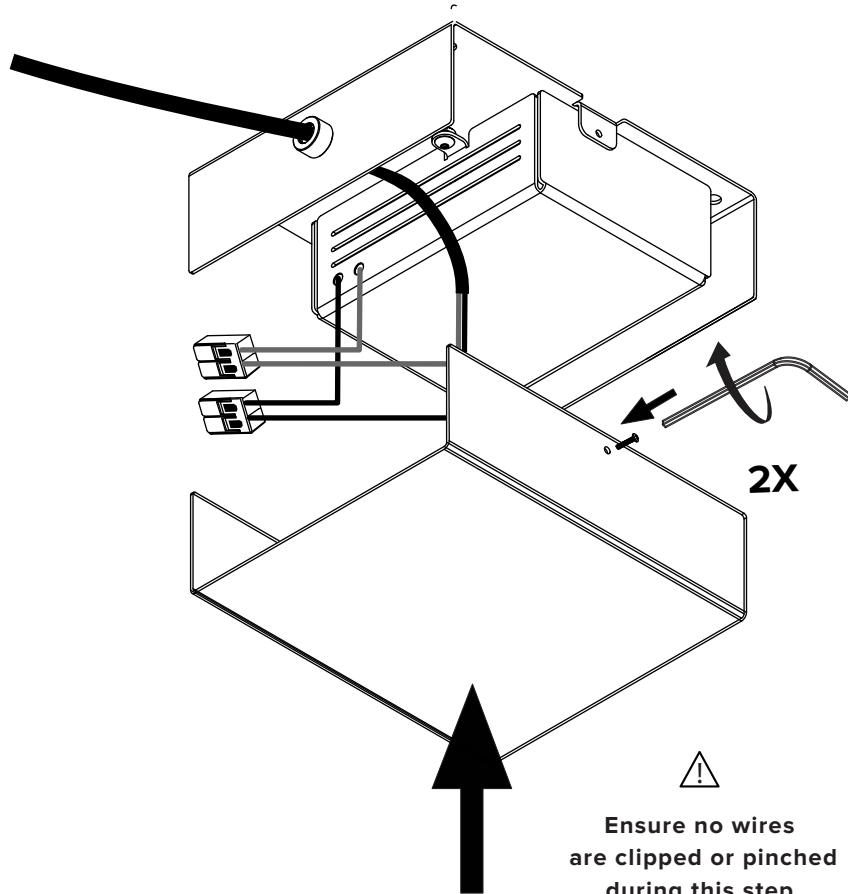

14

Adjust wire length to assure
your lamp is balanced.

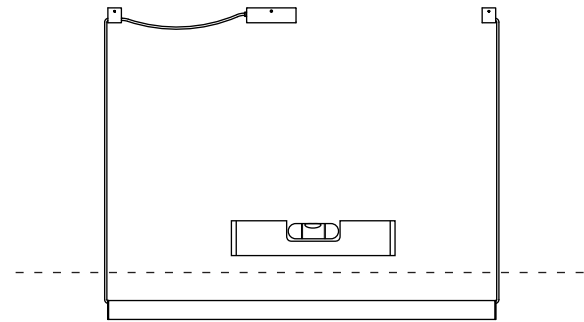

Readjustments may be required
as your luminaire settles and the
wires flex.