

# INSTALLATION INSTRUCTIONS

Item# N1827-732

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLING THE FIXTURE (Fig.1 )

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Slip wire and safety cable into threaded center stem (K) and loop (J).
4. Thread the center rod (K) and loop (J) onto coupler (1).

## HANGING THE FIXTURE (Fig.2)

5. Installed  $\frac{1}{4}$  IPS (nipple) pipe "not provided" with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown. Thread hickey (A) on the  $\frac{1}{4}$  IPS pipe and tighten with hex nut (C).
6. Secure the hex nut (C) and washer (B) onto nipple (D), then thread nipple (D) into the hickey (A); and secure with hex nut (C) and washer (B) on the other end of nipple (D).
7. Thread ceiling loop (E) onto nipple (D) tightly. The nipple length may be adjusted if necessary.
8. Determine the desired hanging height and discard the excess chain.  
Note: 2x quick links (H) are provided and they must be attached to both end of chain (I).
9. Open one quick link (H) and connect to fixture loop (J), then close the quick link (H). Slip collar ring (G) and canopy (F) over the chain (I), then allow canopy (F) to rest on the top of fixture loop (J). Open another quick link (H) and connect to ceiling loop (E), then close the quick link (H).
10. Feed the fixtures wires and safety cable through the chain (I), ceiling loop (E) and nipple (D) then allow them to exit through the side open holes of hickey (A).
11. Run safety cable through hickey (A) open hole and secure safety cable with set screw assembly and set screw.

## CONNECTING THE WIRE (Fig. 3)

12. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it.
13. Tuck wire connections neatly into junction box (JB) Fig 2.
14. Raise the canopy (F) over ceiling loop (E) and secure with collar ring (G)

## ACCESSORIES INSTALLATION (Fig. 1)

15. To begin installing the accessories unwrap the ceramic wavy disc (O) from the packing.
16. Place the hole of the ceramic wavy disc (O) into the threaded round tube of the frame (L) and secure with rubber washers (N) provided and ball nuts with screw (P). Do not over tighten.
17. Repeat the process until completed.

## FINISHING THE FIXTURE (FIG. 1)

18. Install (7) Seven candelabra base bulbs (M) up to 60 watts each or CFL or LED equivalent (not included) in accordance to fixture specifications.

**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**  
**(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. You can now turn the power ON and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**WARNING:** This luminaire must be mounted or supported independently of an outlet box.

FIG. 1

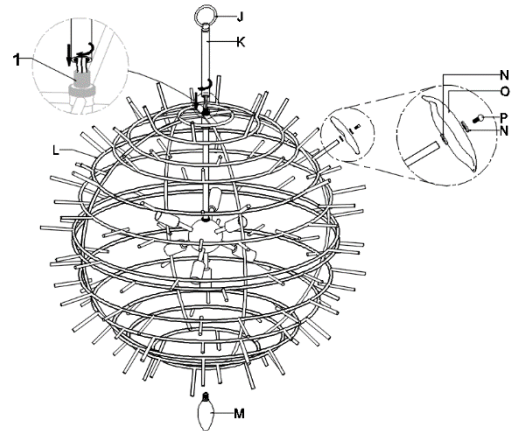


FIG. 2


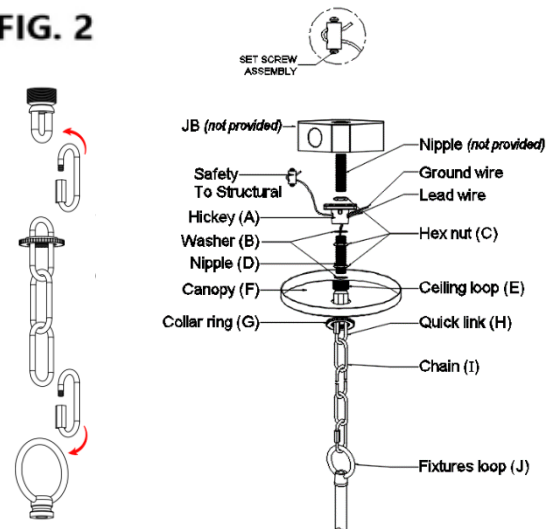


Fig. 3



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

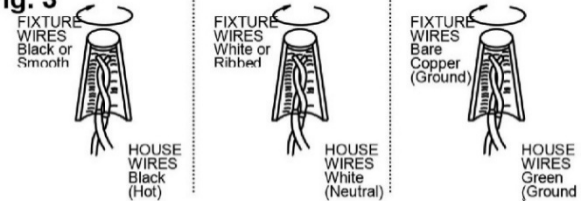