

INSTALLATION INSTRUCTIONS FOR 3977-732-L

For ISLAND LIGHT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove the existing fixture and its mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Adjust 2 strainers (F) to make the length of the safety cable reach the height of the fixing device you need.
4. Position the mounting plate (A) on the ceiling and mark the location of the four drywall anchors (J). Pre-drill the holes for the drywall anchors (J). Then insert the drywall anchors (J) into the ceiling.
5. Put the driver into the junction box (not included). (Note: To be installed with a 4" round or octagon junction box).

CONNECTION THE WIRES (Fig.1 & Fig.2 & Fig. 3)

6. Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (A) using the green screw (B) provided.
7. Pull out black/red output wire of driver through the center hole of mounting plate (A). Attach the mounting plate (A) to the junction box (not included) using mounting screws (C) (Size: 8-32*1/2"L). The side of the mounting plate marked "GND" must face out.
8. Place the wood screws (K) through the holes of the mounting plate (A) and lock into the drywall anchors (J) to secure the mounting plate (A) to the ceiling.
9. The support cable is provided to support weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook (I) on end of support cable into a slot located on mounting plate (A). Carefully allow support cable to support weight of fixture while wiring.
10. Connect the red output wire (marked output +) from driver to the red input wire (marked LED +) from the led module. Connect the black output wire (marked output -) from driver to the black input wire (marked LED -) from led module. See Fig. 2, make sure that all wire connectors are secured.

FINISHING THE INSTALLATION (Fig. 1)

11. Align the canopy (E) onto mounting plate (A) and secure with screws (D).
12. Rotate the glass (J) to the fixture (H). Do not over tighten. Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.1

Set#: A-021-175122
-Mounting plate
-Green screw
-Mounting screw(2)
-Wood screw (4)
-Drywall anchor (4)

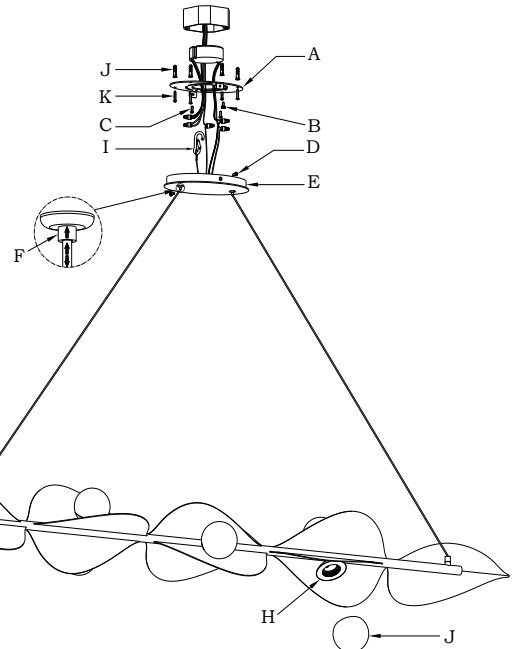


Fig.2


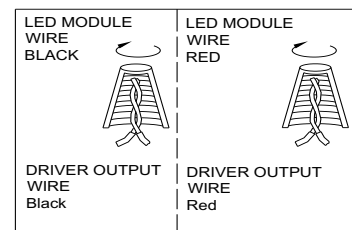


Fig.3



MIN 75°C SUPPLY CONDUCTORS

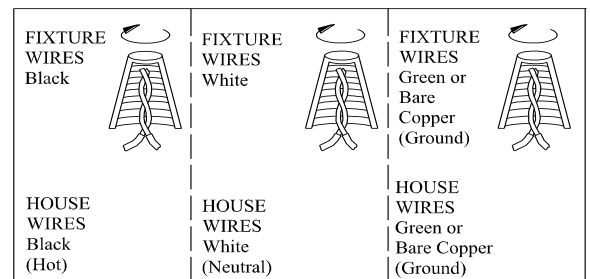

3977-732-L