

INSTALLATION INSTRUCTIONS FOR 3975-732-L

For PENDANT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Fixture includes three 12" and one 6" rods. Determine desired hanging height and thread rods (G1/G2) to all thread (H). Feed fixture wire carefully through each rod. If installing with one 6" rod only the all thread must be removed.
4. Secure rods to the swivel (F) of canopy (D).
5. Put the driver into the junction box (not included). (Note: To be installed with a 4" round or octagon junction box).

CONNECTING THE WIRES (Fig.1 & Fig.2 & Fig.3)

6. Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw (B) provided.
7. Pull out black/red output wire of driver through the hole of mounting plate (A). Attach the mounting plate (A) to the junction box (not included) using mounting screws (C) (Size: 8-32*1/2"L). The side of the mounting plate marked "GND" must face out.
8. Connect the red output wire (marked output +) from driver to the red input wire (marked LED +) from the LED module. Connect the black output wire (marked output -) from driver to the black input wire (marked LED -) from LED module. See Fig. 2, make sure that all wire connectors are secured.

COMPLETING THE INSTALLATION (Fig. 1)

9. Align the canopy (D) onto mounting plate (A) and secure with screws (E).
10. Rotate the glass (J) to the fixture (I). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.



MIN 90°C SUPPLY CONDUCTORS

Fig.1

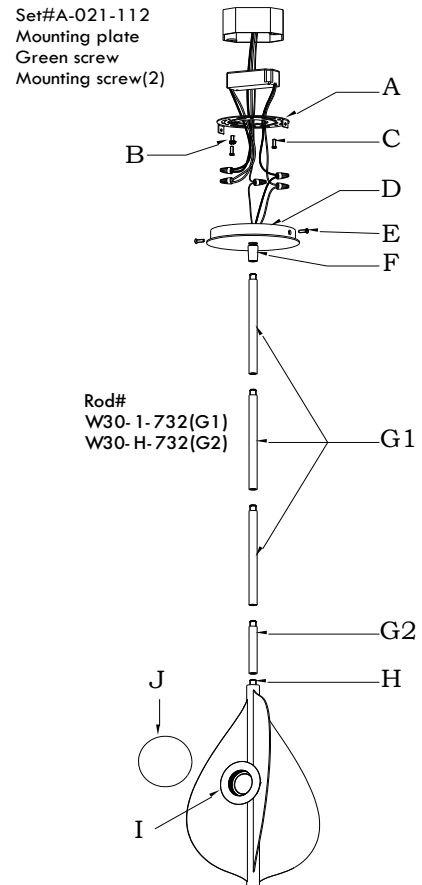


Fig.2


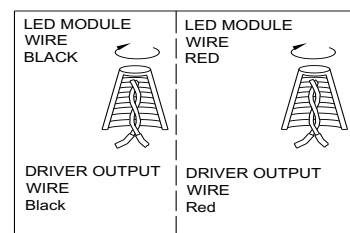


Fig.3

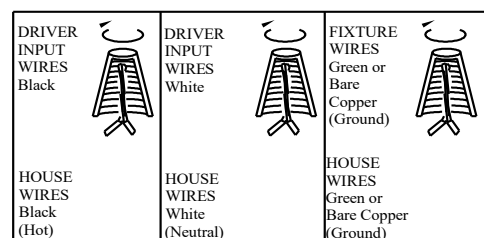

3975-732-L