

INSTALLATION INSTRUCTIONS

Item# 16023-877

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.1)

3. Loosen the finial (G) to remove from mounting screw (C). Thread two mounting screws (C) into mounting plate (A) spaced the same distance apart as the holes on fixture body (F). (You can adjust the length of screws if necessary.)

4. Attach mounting plate (A) to junction box (Not included) using outlet box screws(D) (Size:#8-32N*L1"). The side of the mounting plate (A) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the mounting plate (A) using the green screw (B) provided.

6. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

7. Placing the fixture body (F) to the ceiling by aligning the protruding mounting screw(C) all the way through the mounting plate(A) and tighten the fixture body (F) using 2 finials(G). Fasten the fixture until held firmly against the ceiling.

8. Install (3) three medium base bulbs (I) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

— **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

9. Install rod (J) onto the fixture body (F) secured with hex nut (K). Place the metal washer (L) and plastic washer (M) and glass diffuser (N) over the thread of the rod (J). Secure the glass diffuser by using plastic washer (M) and metal washer (L) with hex nut (K) and lock nut (O). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Note: Min 90°C supply conductors

Fig.1

Set#A-020

-Mounting plate

-Ground Screw

-Outlet Box Screw*2

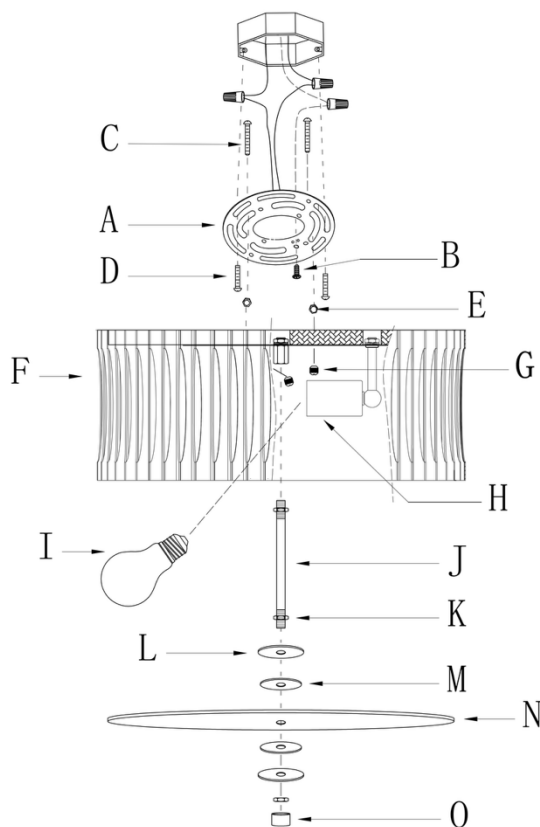


Fig. 2



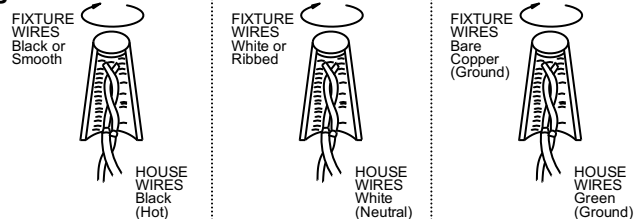


Fig.3

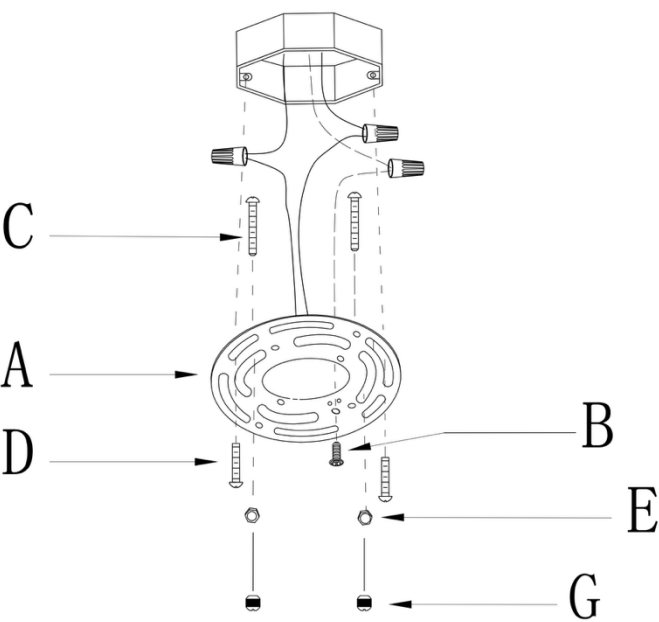

a. Hardware Bag:

- A. Mounting plate*1
- B. Ground Screw*2
- C. Mounting screw*2
- D. Outlet Box Screw*2
- E. Hex nut*2
- G. Finial*2

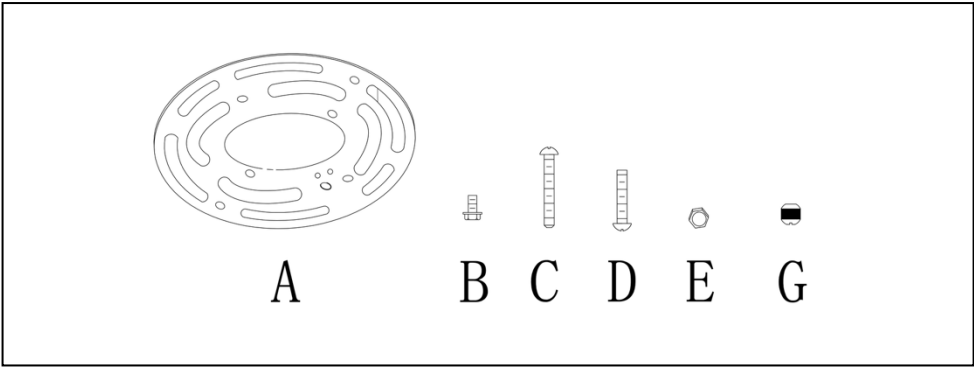

b. Hardware Bag:

- N. Glass diffuser*1

