

INSTALLATION INSTRUCTIONS

Item#16067-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.1)

3. Loosen mounting screw (J) to remove mounting plate (A) from canopy (I). Temporarily raise mounting plate (A) to ceiling. Mark location for anchors (E), use power drill to drill holes for anchors (E). Insert anchors (E) into hole and press flush with ceiling. Repeat on opposite side.

4. Attach mounting plate (A) to junction box (Not included) using junction box screws (C) (Size: #8-32N*L1"). The side of the mounting plate (A) marked "GND" must face out.

5. Screw anchor screws (D) through mounting plate (A) and into anchors (E) (installed in step 3).

6. Determine desired hanging height and thread rods (M/ L) to coupling on fixture body (N). Pass wires carefully through each rod as you assemble.

7. Push fixture wires carefully through the swivel (K) and secure swivel(K) onto rods (L/M). Pass fixture wire carefully through the canopy (I). Place the canopy (I) and metal sheet (H), support cable (S), washer (G) and hex nut (F) onto all the thread of swivel (K), secure them together.

8. The support cable (S) is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (A) and attach hook (V) on end of support cable (S) into a slot located on mounting plate (A). Carefully allow the support cable (S) to support the weight of the fixture while wiring.

CONNECTING THE WIRES (Fig. 2)

9. Connect electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the mounting plate (A) using the green screw (B) provided.

10. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

11. Raise the canopy (I) to the ceiling .Line up the holes in canopy with holes in mounting plate (A) and secure with four mounting screws (J).

12. Screw ceramics shade (Q) over the socket (P) by using socket ring (R). Do not over tighten. Adjust arm (O) to proper position.

13. Install (3) three medium base bulbs (S) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification

—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Note: If the current height is not feasible, adjust to preferred hanging height and secure the knot with zip tie included.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1

Set#A-021-115400

-Mounting plate

-Ground Screw

-Junction Box Screw*2

Rod#

W32-H-732 X 2 (L-6")

W32-1-732 X 6 (M-12")



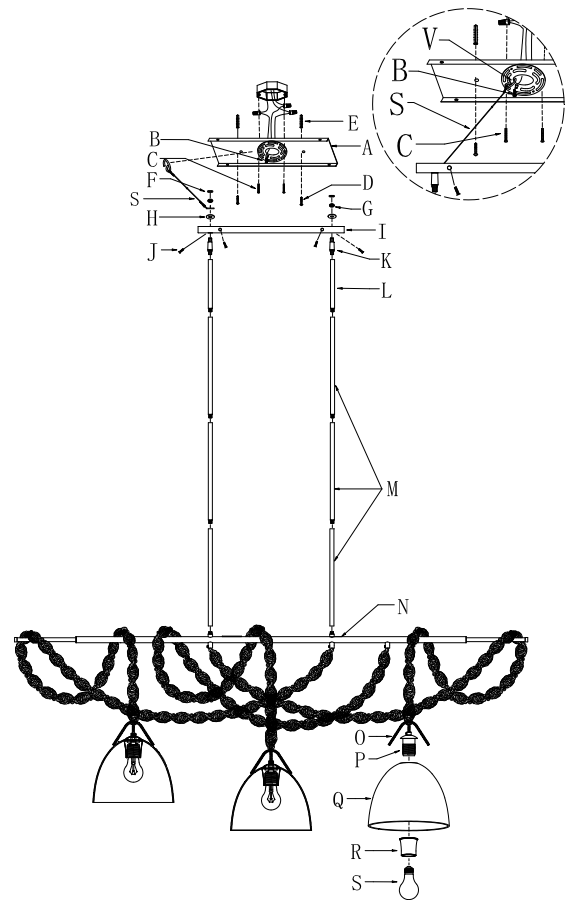


Fig. 2

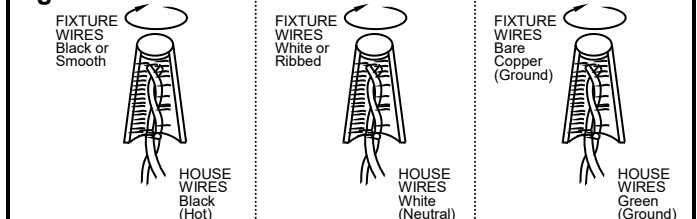


american
lighting
association

Fig.3

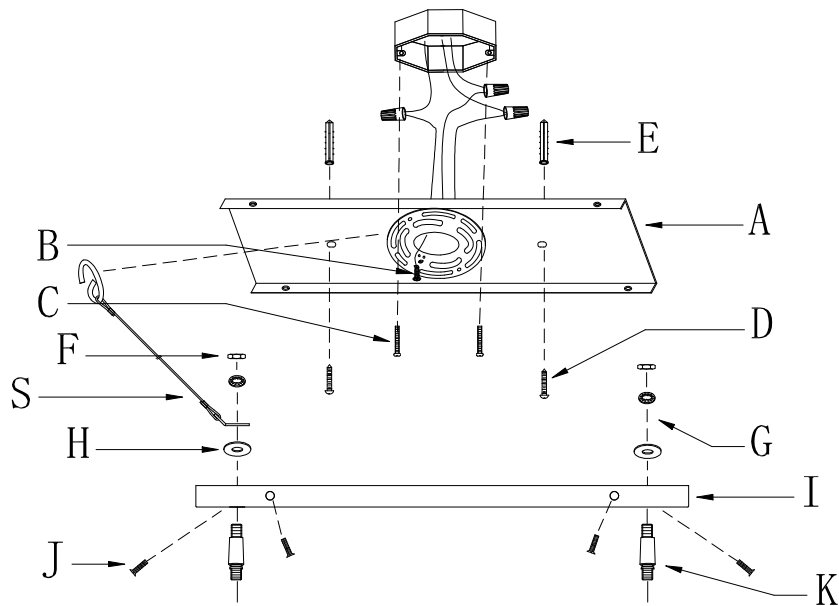

a. Hardware Bag:

- A. Mounting plate*1
- B. Ground Screw*1
- C. Junction Box Screw*2
- D. Anchor screw *2
- E. Anchor*2
- F. Hex nut*2
- G. Washer*2
- H. Metal sheet*2
- I. Canopy*1
- J. Mounting screw*4
- K. Swivel*2
- S. Support cable*1

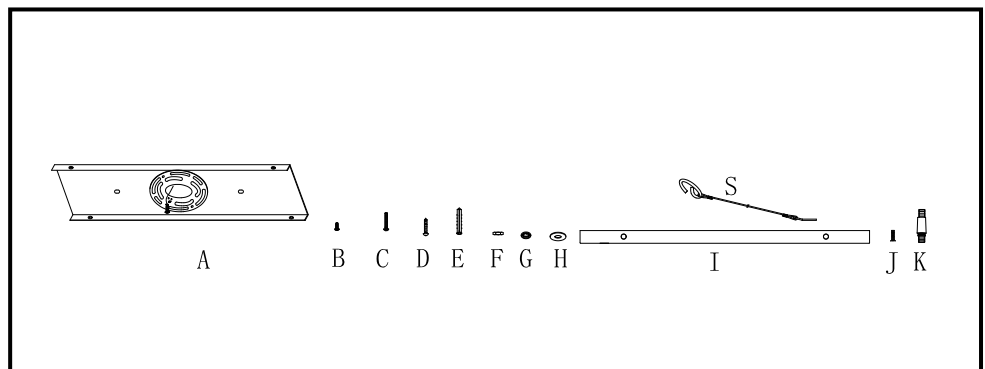

b. Hardware Bag:

- M. ROD 12"*6
- L. ROD 6"*2

