

INSTALLATION INSTRUCTIONS FOR 2506-XXX-L FOR LED ISLAND

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Attach the mounting plate (A) to junction box (not included) using the mounting screws (C) (Size: 8-32*1/2"L). The side of the mounting plate (A) marked "GND" must face out.
4. Position another mounting plate (A) onto the ceiling and mark the location of the two drywall anchors (F). Pre-drill the holes for the drywall anchors (F) and insert the drywall anchors (F) into the ceiling.
5. Place the wood screws (G) through the mounting plate (A) and lock them into the drywall anchors (F) to secure the mounting plate (A) to the ceiling.
6. Adjust 4 strainers (H) to make the length of the safety cable reach the height of the fixing device you need.

CONNECTING THE WIRES (Fig.2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw (B) provided. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION

8. Align the canopy (E) onto the mounting plate (A) and secure with screws (D).
9. Insert the arm (M) into the reserved hole of the glass (I). Make sure the connector (P1) of arm (M) pass through the bottom hole of glass (I). Take the ring (L), align the holes on it with the corresponding positions of the arm (M), and use screws (J) to pass through the ring (L) and lock it into the threads of the arm (M), then tighten it. Do not over tighten.
10. Align the two quick connectors (P1/P2) and connect them to each other, making sure they are properly connected. Noted: Please tuck connectors (P1/P2) into the hole of designated arm (Q). Align the sheet iron (N) onto the arm (M) and secure with screws (O).
11. Finally, use screws (K) to secure the ring (L) onto the designated arm (Q), ensuring a firm and stable installation.


Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling fixture, do not apply pressure to LED. Hold fixture by the base only.

Fig.1

Set#: A-021-165108

-Mounting plate
-Green screw
-Mounting screw(2)

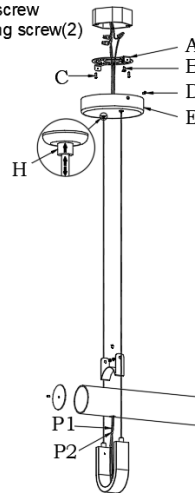

Set#: A-021-165108

-Mounting plate
-Wood screw (2)
-Drywall anchor (2)


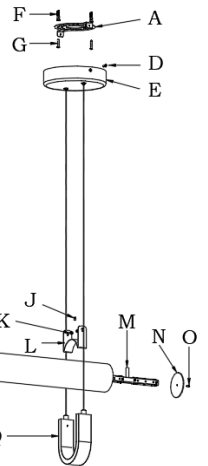


Fig.2

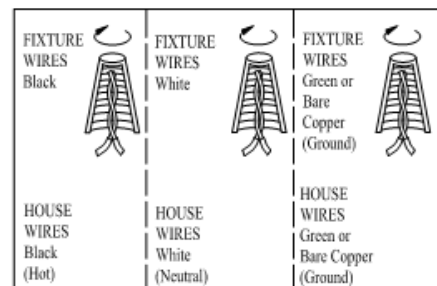

INSTALLATION INSTRUCTIONS FOR 2506-XXX-L FOR LED ISLAND

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig. 3)

Warning: Turn off power at the circuit breaker before replacing LED module.

- Loosen screws (K) and (J), then remove the ring (L) and designated arm (Q).
- Disconnect the quick connectors (P1/P2).
- Loosen screws (O) and remove the sheet iron (N). Then remove glass (I).
- Carefully remove LED module (M).
- Reverse steps a-d for installing the new LED module.

Note: The LED module should be provided by a specified supplier.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.3

