

Project:

Type:

Quantity:

Note:

SKU#: MLO - 14S - - - 30K -

Description

A tubular frosted acrylic diffuser paired with a stamped steel backplate adds contemporary styling to any space.

Features

- Stamped Steel construction
- Frosted acrylic tube diffuser
- Driver located in junction box
- Damp location rated
- JA8-2016 Listed



**QUICK
SHIP** | AVAILABLE
IN 2 WEEKS

Deep Backplate
Standard Finish
Option Only

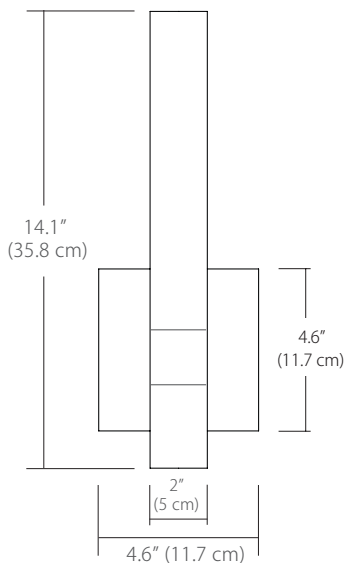
Specifications (Standard)

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 11W
- Input Voltage: 120VAC 50/60Hz
- Delivered Lumens: 659 Lm (measured at 3000K)
- Fixture Weight: 1.9 lb. (.86 kg)
- Standard Backplate: S4 - 4.6"H x 4.6"W x .5"
- Dimming: TRIAC dimmable
- For recommended dimmers, see <http://blackjacklighting.com>

Options

- Upgradable to 120-277V input driver with Universal Dimming (only available with standard Deep Backplate in standard finish)
- Standard Finish: SN - Satin Nickel
- Special Order Painted Finishes: BL - Matte Black, BZ - Bronze, or SG - Satin Gold
- Optional Deep Backplate (DB) - 4.6"H x 4.6"W x 1.3"D

Dimensions



(Shown above with Standard S4 Backplate)



Shown Above:

MLO-14S-SN-12T-30K-SO-S4

ORDERING GUIDE

Family

MLO

MLO Milo

Size

14S

14S 14" Sconce

Finish

Standard
SN Satin Nickel
Special Order
BL Matte Black
BZ Bronze
SG Satin Gold

Volts/Dimming

Standard
12T 120VAC TRIAC Dimming
Only (All Backplates)
Special Order
27U 120-277VAC
Universal Dimming
(Deep Backplate Only)
27Z 120-277VAC
(0-10V Dimming Only)
(Shallow S4 Backplate Only)

Color Temp.





30K
30K 3000K (Default)
27K 2700K
35K 3500K
40K 4000K

Backplate

Standard
S4 4.6" Shallow Backplate (Standard)
(Driver located inside junction box)
Special Order
DB Deep Backplate
(Driver located in backplate)

Example: MLO-14S-BZ-12T-30K-SO-DB

Finishes

Finish				
				
SN	SN - Satin Nickel	BL - Matte Black	BZ - Bronze	SG - Satin Gold
BL				
BZ				
SG				
	Standard Finish	Special Order Powder Coat Finishes		

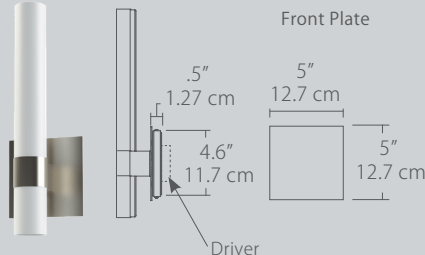
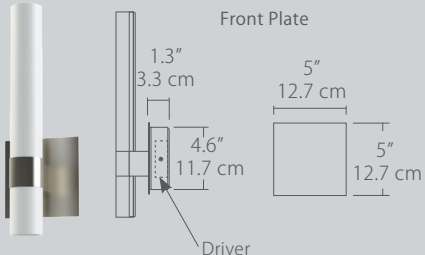
Volts/Dimming

Volts/Dimming	
12T	12T: Input: 120V , Dimming: TRIAC (Standard)
27U	27U: Input: 120-277V , Dimming: TRIAC/ ELV/ 0-10V (Deep Backplate Only) (Special Order)
27Z	27Z: Input: 120-277V , Dimming: 0-10V (Shallow S4 Backplate Only) (Special Order)

Color Temperature

Color Temp.	
	27K - 2700K
27K	30K - 3000K (Default)
30K	35K - 3500K
35K	40K - 4000K
40K	

Backplates

Backplates		
		
S4	S4 - Shallow 4.6" Backplate - (4.6"H , 4.6"W , .5"D) Driver located inside J-Box	DB - Deep Backplate - (4.6"H , 4.6"W , 1.3"D) Driver located inside Backplate
DB	Standard Backplate	Special Order Backplate