

Project:

Type:

Quantity:

Note:

SKU#: LIN - 14S - - - 30K -

Description

A tubular frosted glass diffuser paired with a stamped steel back plate. The Lino Sconce adds contemporary styling to any space.

Features

- Stamped Steel construction
- Frosted glass tube diffuser
- Driver located inside junction box
- Damp location rated
- JA8-2016 Listed

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 11W
- Input Voltage: 120VAC 50/60Hz
- Delivered Lumens: 916 Lm (measured at 3000K)
- Fixture Weight: 1.9 lb. (.86 kg)
- Standard Backplate: S4 - 4.6"H x 4.6"W x .5"D
- Dimming: TRIAC dimmable
- For recommended dimmers, see <http://blackjacklighting.com>

Options

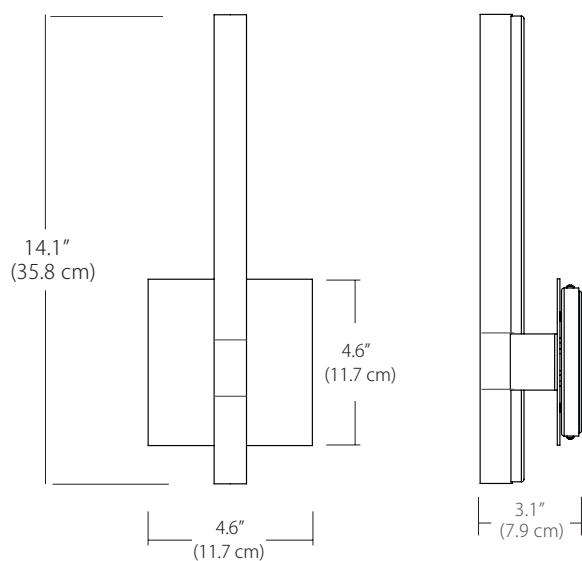
- Available in 2700K, 3000K, 3500K, and 4000K color temperatures
- Standard S4 Backplate comes with 0-10V Dimming only
- Upgradable to 120-277V input driver with Universal Dimming Driver (only available with Deep Backplate in standard finish)
- Standard Finish : SN - Satin Nickel
- Special Order Painted Finishes: BL - Matte Black, BZ - Bronze or SG - Satin Gold
- Optional Deep Backplate (DB) - 4.6"H x 4.6"W x 1.3"D



QUICK SHIP | AVAILABLE
IN 2 WEEKS

Deep Backplate
Standard Finish
Option Only

Dimensions



(Shown above with Standard S4 Backplate)







Shown Above:
LIN-14S-SN-12T-30K-SO-S4

ORDERING GUIDE

Family	Size	Finish	Volts/Dimming	Color Temp.	Backplate
LIN	14S			30K	
LIN Lino	14S 14" Sconce	Standard SN Satin Nickel Special Order BL Matte Black BZ Bronze SG Satin Gold	Standard 12T 120VAC TRIAC Dimming Only (All Backplates) Special Order 27U 120-277VAC Universal Dimming (Deep Backplate Only) 27Z 120-277VAC (0-10V Dimming Only) (Shallow S4 Backplate Only)	30K 3000K (Default) 27K 2700K 35K 3500K 40K 4000K	Standard S4 4.6" Shallow Backplate (Standard) (Driver located inside junction box) Special Order DB Deep Backplate (Driver located in backplate)

Example: LIN-14S-BZ-12T-30K-SO-S4

Finishes

Finish				
				
SN	SN - Satin Nickel	BL - Matte Black	BZ - Bronze	SG - Satin Gold
BL				
BZ				
SG				
	Standard Finish	Special Order Powder Coat Finishes		

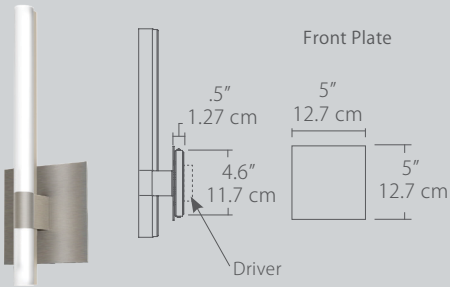
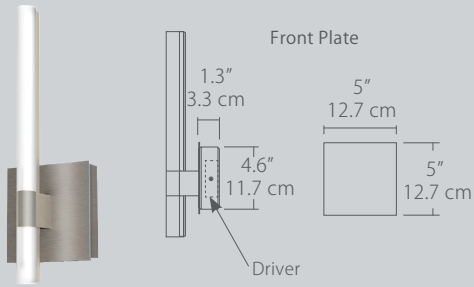
Volts/Dimming

Volts/Dimming	
12T	12T: Input: 120V , Dimming: TRIAC (Standard)
27U	27U: Input: 120-277V , Dimming: TRIAC/ ELV/ 0-10V (Deep Backplate Only) (Special Order)
27Z	27Z: Input: 120-277V , Dimming: 0-10V (Shallow S4 Backplate Only) (Special Order)

Color Temperature

Color Temp.	
27K	27K - 2700K
30K	30K - 3000K (Default)
35K	35K - 3500K
40K	40K - 4000K

Backplates

Backplates		
		
S4	S4 - Shallow 4.6" Backplate - (4.6"H , 4.6"W , .5"D) Driver located inside J-Box	DB - Deep Backplate - (4.6"H , 4.6"W , 1.3"D) Driver located inside Backplate
DB	Standard Backplate	Special Order Backplate