

Project:

Note:

Type:

Quantity:

Model#: SP - PBX - FR - 10 - - - 12W - -

Description

Classic tapered form with playful additions of color and scale. Quality Illumination delivered via integrated, highly-efficient LEDs and frosted glass diffuser. Fixture provides optional universal voltage input and universal dimming.

Features

- Suspends from an 12' adjustable cable
- Spun aluminum construction with two-color powder coated paint finish
- Damp location rated



QUICK SHIP | AVAILABLE IN 2 WEEKS


Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 12W
- Delivered Lumens: 12W - 700 Lumens (Gold Interior); 12W - 800 Lumens (White Interior)
- Cable Length: 12'; for longer lengths consult factory
- Fixture Weight: 2.1 lb. (.95 kg)
- For recommended dimmers, see <http://blackjacklighting.com>

Options

- 2700K, 3000K, 3500K, 4000K Color Temperature options
- Mounting Options: SP5 (standard), SP2, MPC (Multi-Port Connector), JTA (JackTrack)

Dimensions

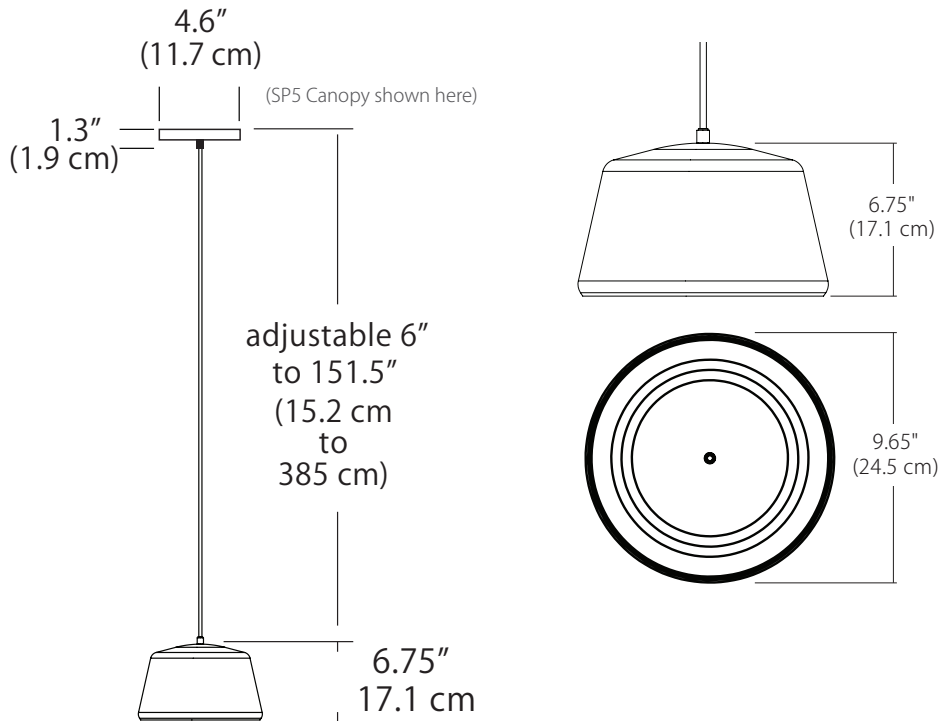

Finishes



ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	PBX	FR	10		30K	12W	SP5	144
SP Small Pendant	PBX Pillbox	FR Frosted diffuser w/ integrated light kit	10 10" Diameter	WG White w/ Gold Interior BG Black w/ Gold Interior BW Black w/ White Interior SW Satin Nickel w/ White Interior	27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard)	12 Watts	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter (See page 2 for mounting information)	144" (Standard) (Change Length for custom cable length, in inches)

Example: SP-PBX-FR-10-WG-30K-12W-SP5-96

Customer specified RAL color code finishes available. Minimum order quantities and price changes apply.

Finish

Finish					
WG					
BG					
BW					
SW					
	WG = White w/ Gold Interior	BG = Black w/ Gold Interior	BW = Black w/ White Interior	SW = Satin Nickel w/ White Interior	

Wattage

Wattage	
12W	12W = 12 Watts / 700 Lumens (Gold Interior), 13 Watts / 800 Lumens (White Interior) (Lumens measured at 3000K)

Mounting

Mounting	
SP5	SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)
SP2	SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) Cable with modular connector (and optional wire harness) attaches to a remote driver
MPC	MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)
JTA	JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter
























SP5 5" Canopy (integrated driver)	SP2 2.5" Fascia Canopy (driver sold separately)	MPC Multi-Port Connector (canopy and driver sold separately)	JTA JackTrack Adapter (track and driver sold separately)
<p>4.7" dia. (11.7 cm)</p> <p>.8" (2.0 cm)</p> <p>field adjustable 2" to 151.5" (5.8 cm to 385 cm)</p> <p>(For longer length consult factory)</p>	<p>2.5" dia. (6.4 cm)</p> <p>.4" (1.2 cm)</p> <p>field adjustable 2" to 152" (5.8 cm to 386 cm)</p>	<p>.5" dia. (1.3 cm)</p> <p>field adjustable 2" to 152" (5.8 cm to 386 cm)</p> <p>(For longer length or pre-adjustment consult factory)</p>	<p>1" dia. (2.5 cm)</p> <p>152" (field-cut to length)</p> <p>(For longer lengths or to be pre-cut consult factory)</p>

Max Cable Length

Length	
144" (Standard)	144" (Standard) (Change Length for custom cable length, in inches)
CU - Custom	Factory pre-configuration of cable length is available. Consult factory for details.

For full specifications and ordering information, see blackjacklighting.com

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant		 (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.		 (Remote Driver required)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 9 Port  25 Port	 (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 10 Port  18 Port	 (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 5 Port  11 Port	 (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 3 Port  9 Port	 (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 3 Port  12 Port	 (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack See JackTrack Spec Sheet 48" JackTrack See JackTrack Spec Sheet 94" JackTrack See JackTrack Spec Sheet	  	 (Integrated or Remote Driver)	BL Matte Black WH White


System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------

Quatro


4S (4' 2x2 / 9 Port)
MSQ-2409-#-#-4S-#-#

MPC

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)

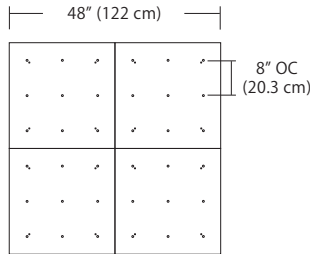


6S (6' 3x3 / 25 Port)
MSQ-2425-#-#-6S-#-#

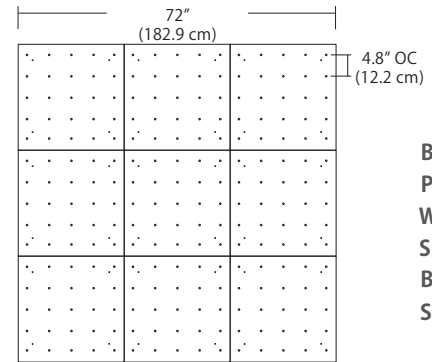


BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)

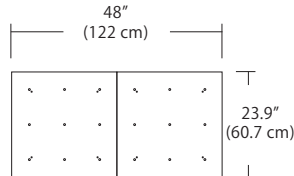

4L (4'x2' / 9 Port)
MSQ-2409-#-#-4L-#-#

6L (6'x2' / 25 Port)
MSQ-2425-#-#-6L-#-#

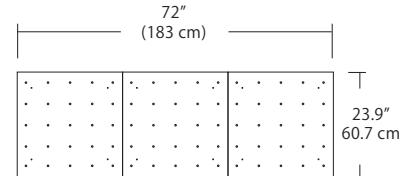


Duo


6L (6'4"x6" / 10 Port)
MSD-3810-#-#-6L-#-#

MPC

Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)

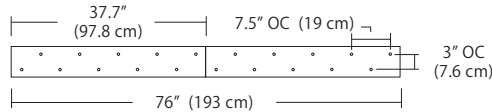



9L (9'6"x6" / 18 Port)
MSD-3818-#-#-9L-#-#

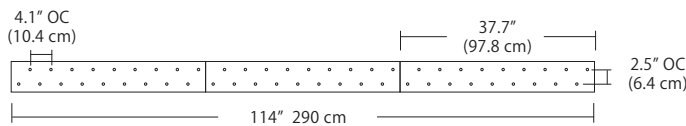

BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver


Solo

Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)

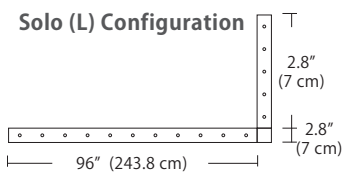


Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

MPC

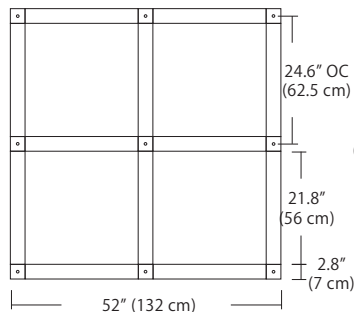

Solo 48" Grid Configuration

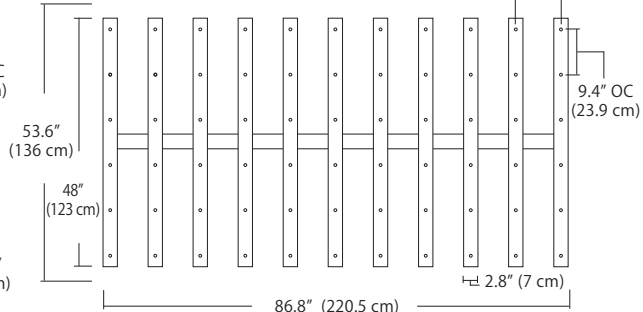

BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver