

SHORT CONE SUSPENDED PENDANT




SPECIFICATIONS

Finish	Matte Black, White, or Polished Chrome
LED Color Temperature	3000K (standard) 2700K, 3500K, or 4000K also available
Wattage	5 Watts / 397 Lumens
Driver Location	Integral in canopy, remote, or above canopy (depending on canopy selected)
Dimming	Universal (TRIAC, ELV, 0-10V)
Color Rendering Index	90CRI
Input Voltage	120VAC - 50/60Hz
Cable Length	8' (for longer lengths, consult factory)

CUSTOM OPTIONS

See page 2 for socket finish and cord color options.

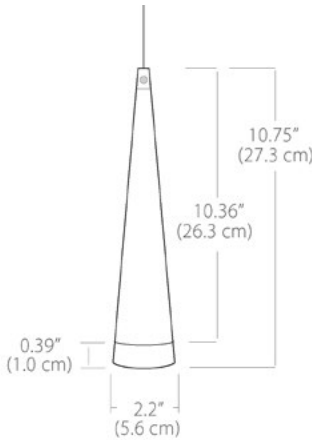

Shown in  
Matte Black (BL)



Shown in  
Polished Chrome (PC)


ORDERING GUIDE

PRODUCT CODE								OPTIONS	
CATEGORY	SERIES	DIFFUSER	SIZE	SOCKET COLOR	CCT	WATTAGE	MOUNTING	CABLE LENGTH	CABLE COLOR
SP	COS	RR	02			5W			
SP Small Pendant	COT Tall Cone	RR Reflector Ring	02 2" Diameter	Standard BL - Matte Black WH - White PC - Polished Chrome Special Order BZ - Bronze SG - Satin Gold SS - Satin Silver	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K (30K Standard)	5W 5 Watts / 397 Lm	SP2 - 2.5" Canopy SP5 - 5" Canopy MPC - Multi-Port Canopy JTA - JackTrack	Indicate Cable Length in Inches - leave blank for default 096 = 96" (default) 240 = 240" (max.)	Standard Leave blank for default color BL - Matte Black MT- Metallic (See p. 2 for default cable colors)

Example Part Number: SP-COS-RR-02-BL-30K-3W-SP5

PROJECT:		SPECIFIER:	
SKU:			
QUANTITY:		DATE:	

Socket Color

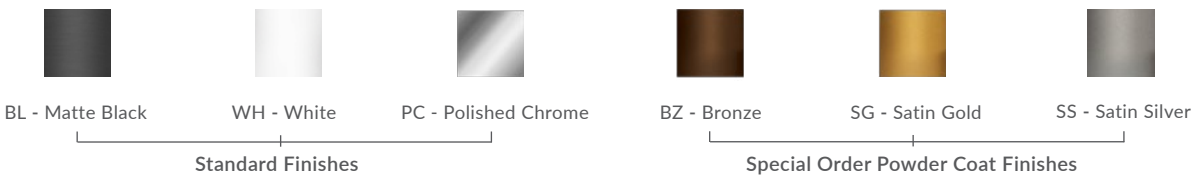

Cable Color

BL - Matte Black

MT - Metallic

Standard Cord Colors

Default Color Matches


SOCKET	CABLE
Black	Black
White	Metallic
Polished Chrome	Metallic
Bronze	Black
Satin Gold	Black
Satin Silver	Metallic

Wattage (Lumens measured at 3000K)

5W = 5 Watts / 397 Lumens

Mounting

- SP5** = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box  
*Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)*
- SP2** = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)  
*Cable with modular connector (and optional wire harness) attaches to a remote driver*
- MPC** = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)  
*Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)*  
MPC options include:  
Solo Systems, Duo Systems, Quatro Systems, and JackTrack Systems  
MPC, MPR, MS, MQ, MD canopies
- JTA** = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)  
*Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter*

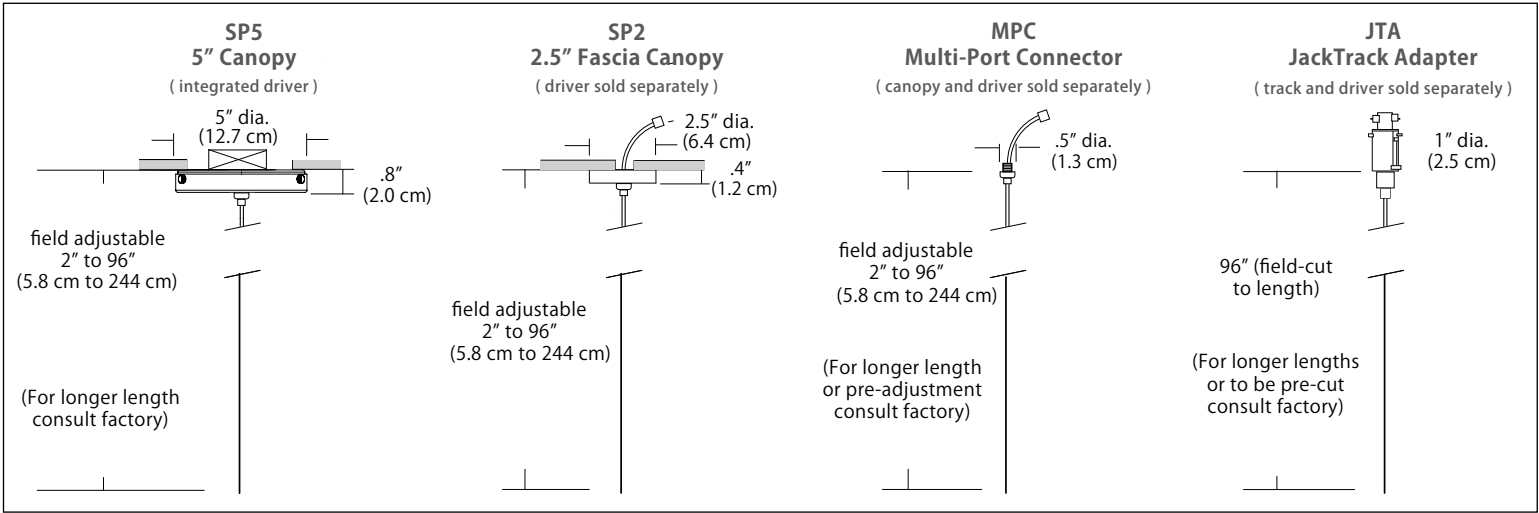
























Cable Length

096 = 96" (Default Length).

XXX = Custom Length (300" = maximum length)


For Custom Lengths, please indicate length in inches.

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see [blackjack.com](http://blackjack.com).


Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	<b>5" Canopy</b> Canopy and driver included with pendant	 5" dia. (12.7 cm)	 .8" (2 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	<b>2.5" Fascia Canopy</b> Canopy included with pendant. Driver sold separately.	 2.5" dia. (6.4 cm)	 .4" (1.3 cm) (Remote Driver required)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPS MQ	<b>24" Multi-Port Square - 9 Port</b> C-MPS-2409-# MQ-2409-#  <b>24" Multi-Port Square - 25 Port</b> C-MPS-2425-# MQ-2425-#	 8" OC (20.3 cm) 23.9" (60.7 cm) 9 Port   4.8" OC (12.2 cm) 23.9" (60.7 cm) 25 Port	 21.5" (54.6 cm) 2.5" (6 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPT MD	<b>38" Multi-Port Rectangle - 10 Port</b> C-MPT-3810-# MD-3810-#  <b>38" Multi-Port Rectangle - 18 Port</b> C-MPT-3818-# MD-3818-#	 7.5" OC (19 cm) 3" OC (7.6 cm) 37.7" (97.8 cm) 10 Port   4.1" OC (10.4 cm) 2.5" OC (6.4 cm) 37.7" (97.8 cm) 18 Port	 4.7" (11.9 cm) 2.5" (6 cm) 6" 15.2 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPL	<b>22" Multi-Port Linear - 5 Port</b> C-MPL-2205-# MS-2205-#  <b>48" Multi-Port Linear - 11 Port</b> C-MPL-4811-# MS-4811-#	 4.4" OC (11.2 cm) 2.8" (7 cm) 21.8" (56 cm) 5 Port   4.4" OC (11.2 cm) 2.8" (7 cm) 48" (123 cm) 11 Port	 2.8" (7 cm) 1.4" (4 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPR	<b>10" Round - 3 Port</b> C-MPR-1003-#  <b>10" Round - 9 Port</b> C-MPR-1009-#	 11" dia. (27.9 cm) 7.4" OC (18.8 cm) 3 Port   11" dia. (27.9 cm) 2.9" OC (7.4 cm) 9 Port	 10" dia. (25.4 cm) 2.1" (5.3 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPR	<b>20" Round - 3 Port</b> C-MPR-2003-#  <b>20" Round - 12 Port</b> C-MPR-2012-#	 20" dia. (50.8 cm) 14.5" OC (36.8 cm) 3 Port   20" dia. (50.8 cm) 6.4" OC (16.3 cm) 12 Port	 18" dia. (45.7 cm) 2.5" (6 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	<b>24" JackTrack</b>  <b>48" JackTrack</b>  <b>94" JackTrack</b>	 1.75" (4.5 cm) 23" (58.4 cm)   1.75" (4.5 cm) 47" (119.4 cm)   1.75" (4.5 cm) 94" (238.8 cm)	 1.38" (3.5 cm) 1.75" (4.5 cm) (Integrated or Remote Driver)	BL Matte Black WH White

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------

## Square Configurations

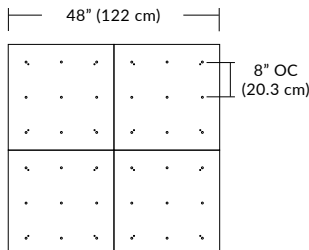


6S (6' 3x3 / 25 Port)  
MO-2425-XX-6S-X-XXK

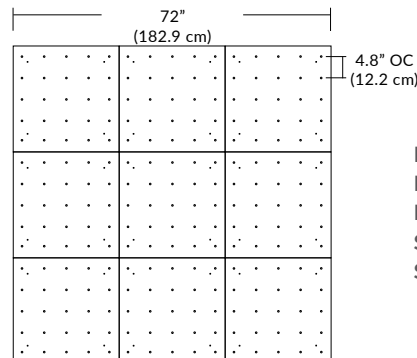

BL Matte Black  
PC Pol. Chrome  
BZ Bronze  
SG Satin Gold  
SS Satin Silver

6L (6'x2' / 25 Port)  
MQ-2425-XX-6L-X-XXK

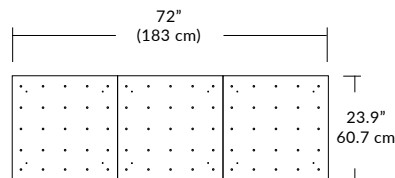

## Linear Configurations


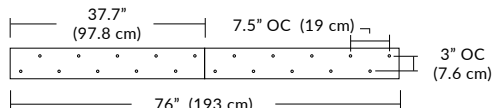



Figure 1 shows the elevation view of the bridge deck. The deck width is 114' 290 cm. The reinforcement bar spacing is 4.1" OC (10.4 cm) for the main span and 2.5" OC (6.4 cm) for the approach spans. The main span length is 37.7' (97.8 cm).

BL Matte Black  
PC Pol. Chrome  
BZ Bronze  
SG Satin Gold  
SS Satin Silver


### Solo 48" Linear Configuration




### Solo (L) Configuration

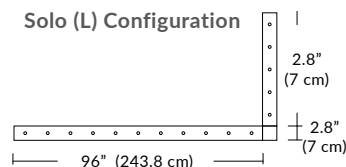

### Solo 22" Grid Configuration

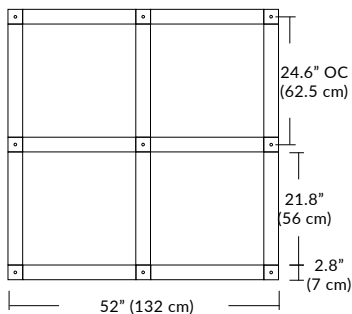

### Solo 48" Grid Configuration

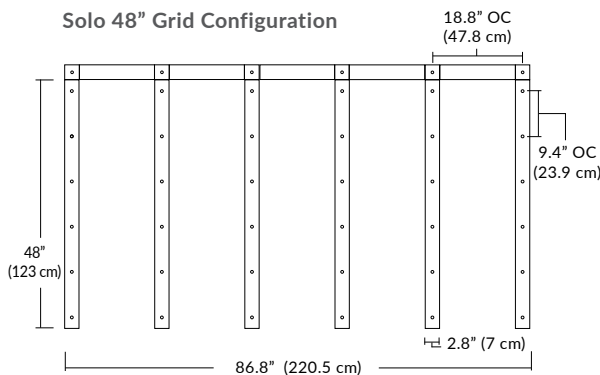

BL Matte Black  
PC Pol. Chrome  
BZ Bronze  
SG Satin Gold  
SS Satin Silver