



CONTENTS

Laddi Sconce 02 (120V/240V)

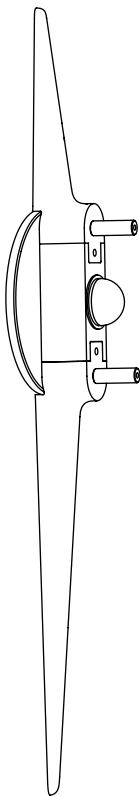

(x2) 8-32 J box Screw




(x7) Wago Connectors



(x2) Long screws




Crossbar with stand-offs




(x2) Thumb nuts with rubber washers




Glass Shade

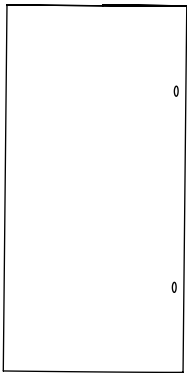


LED Driver (120V)



(x2) Toggle anchor
On 240V fixtures only



(x2) Wood screw
On 240V fixtures only




(x2) Long 8-32 screw
On 240V fixtures only



(x2) Metal screw
On 240V fixtures only



Driver Box
(240V only)



SAFETY INFORMATION


Maximum ambient temperature: 25°C

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

LADDI SCONCE 02 (120V) | INSTALLATION

Note: Please contact a licensed electrician.


01. Take the LED driver (A), and connect the lead wires with the provided 2-port wagos (B) from the J-box (C).
 02. Optional, make the dimming wire connection (D) with the provided 2-port wagos.
 03. Fit the LED driver inside the J-box and tuck in the connected wires.
 04. Bring the crossbar with stand-offs (E) up to the J-box (C), and make the ground wire connection using the provided 2-port wago (F).
 05. Pull the low voltage wires through the cent hole of the crossbar.
- Then tuck in all the wires into the J-box, and secure the crossbar to J-box with two 8-32 screws (G).

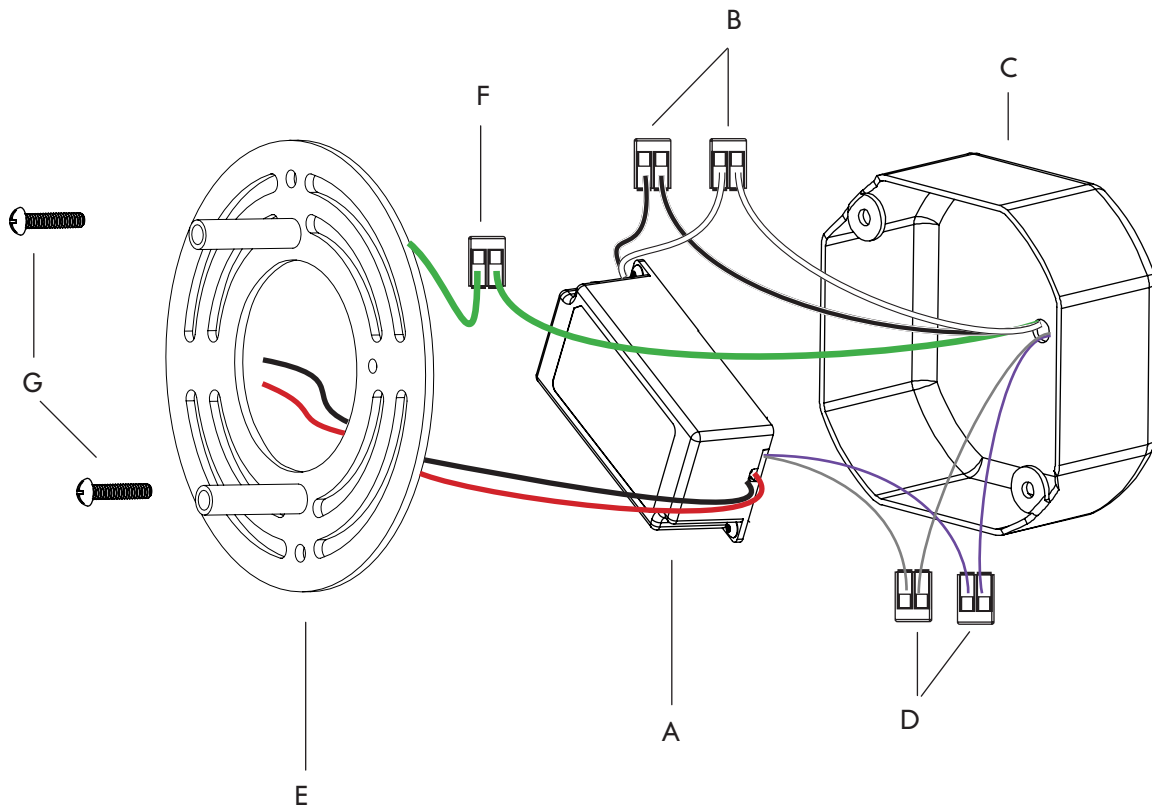

LADDI SCONCE 02 (120V) | INSTALLATION

Note: Please contact a licensed electrician.


06. Bring the sconce base (H) up to the crossbar (E), and make the low voltage wire connection (I) with the provided 2-port wagos.
07. Tuck the low voltage wires back into the J-box. Then secure the sconce base (H) to the crossbar (E) with two button head screws (J). Be sure not to pinch any wires.

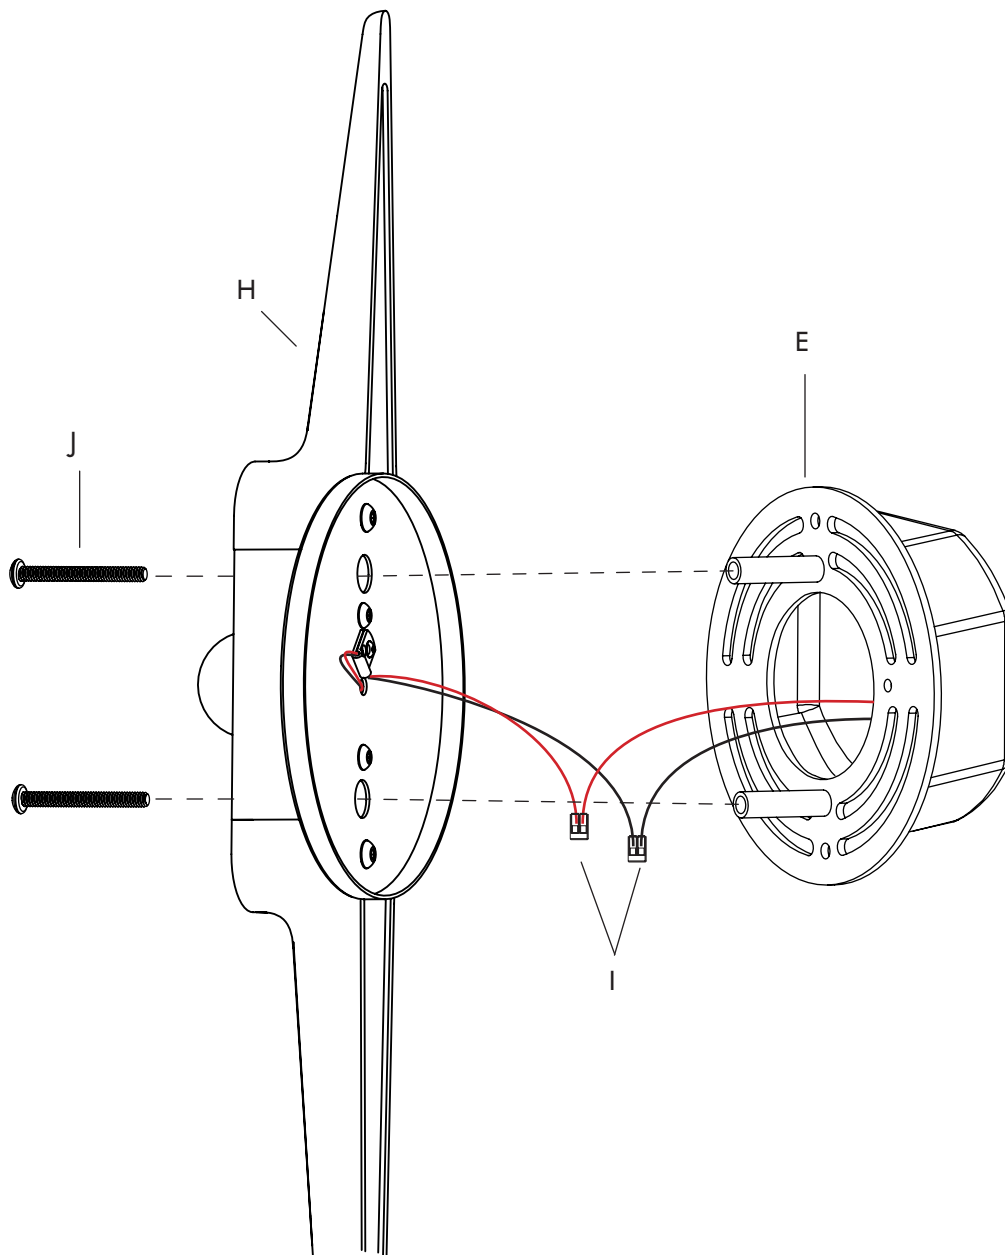

LADDI SCONCE 02 (120V) | INSTALLATION

Note: Please contact a licensed electrician.


09. Once the fixture is secure on the wall, attach the glass shade (K) onto the two stand-offs (L) using two rubber washers (M) on the inside of the glass shade, and a two thumb nuts (N).
Do not over tighten as the glass may crack.

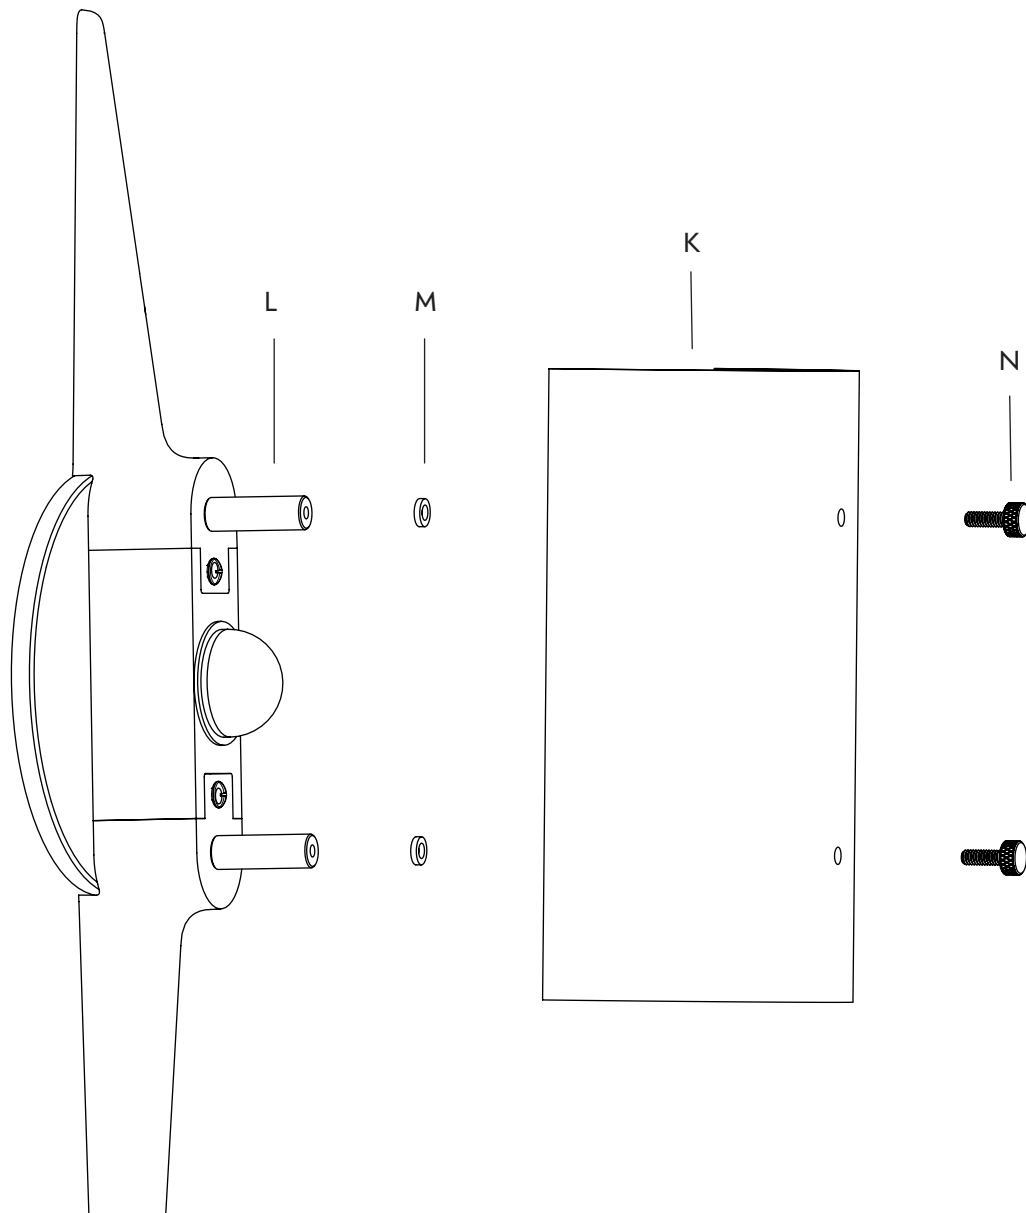

LADDI SCONCE 02 (240V) | INSTALLATION

Note: Please contact a licensed electrician.


01. Connect the lead wires (A) to the power supply wires.
02. Optional: Make the dimming wires connection (B) with the provided 2-port wago's.
03. Mount crossbar with driver enclosure (C) to the wall using the provided 240V hardware/screws (D).

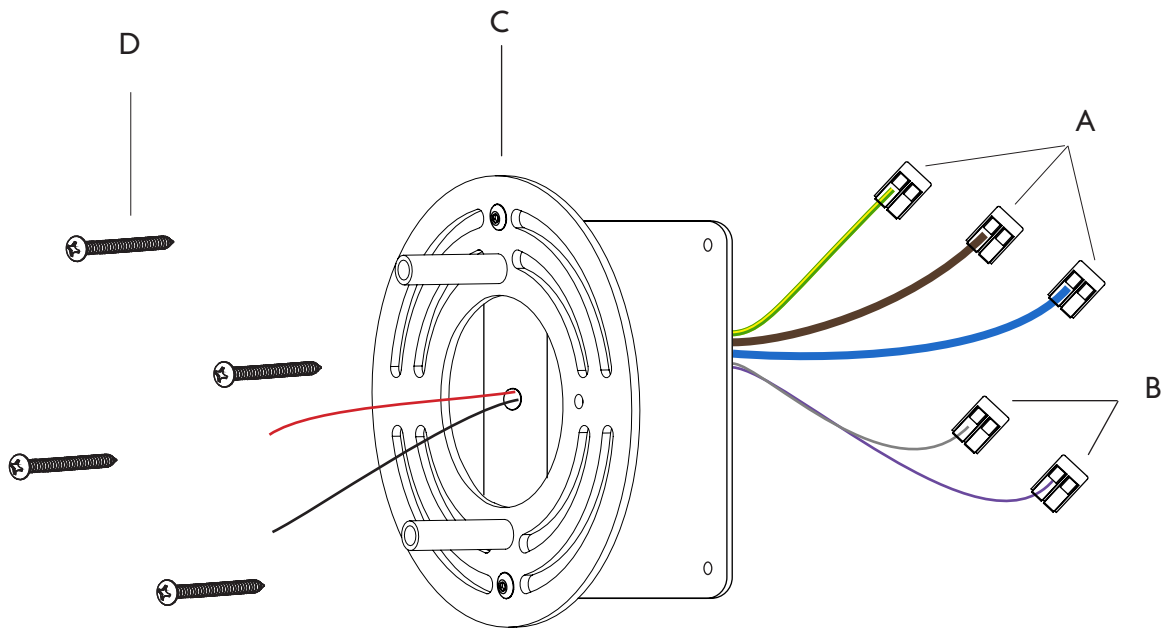

LADDI SCONCE 02 (240V) | INSTALLATION

Note: Please contact a licensed electrician.

04. Bring the sconce base (E) up to the crossbar (C), and make the low voltage wire connection (F) with the provided 2-port wagos. Then tuck in the wires behind the crossbar.
05. Secure the sconce base (E) to the crossbar (C) with two button head screws (G).
Be sure not to pinch any wires.

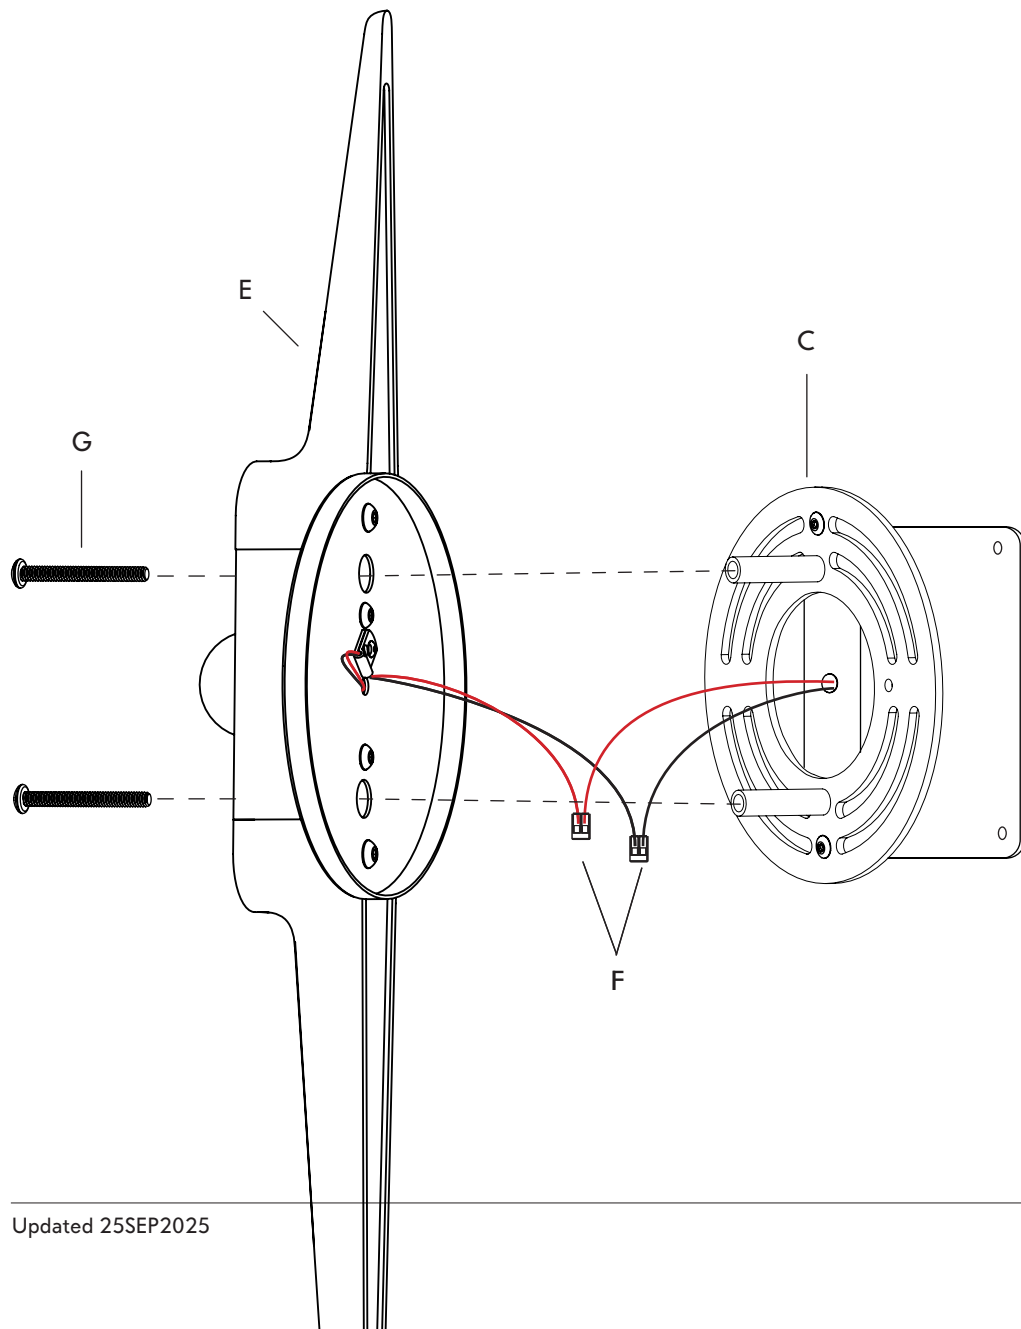

LADDI SCONCE 02 (240V) | INSTALLATION

Note: Please contact a licensed electrician.

06. Once the fixture is secure on the wall, attach the glass shade (H) onto the two stand-offs (I) using two rubber washers (J) on the inside of the glass shade, and a two thumb nuts (K).
Do not over tighten as the glass may crack.

