



SURFACE MOUNT ACRYLIC GLOBE SMALL - BUBBLE DIFFUSER



SP2 CANOPY
MOUNTING OPTION
(DRIVER SOLD SEPARATELY)



SP5 CANOPY
MOUNTING OPTION
(INTEGRATED DRIVER)

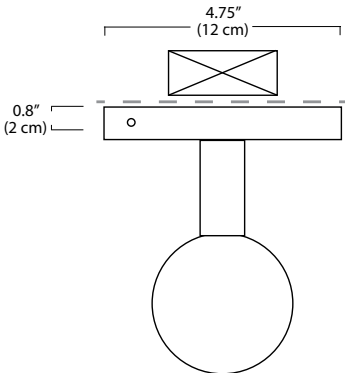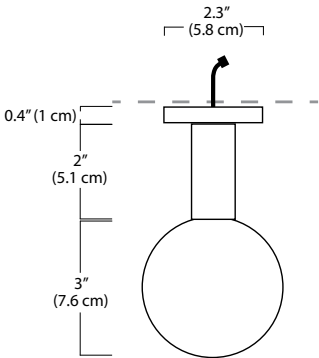

SPECIFICATIONS

COLOR RENDERING INDEX	90 CRI
FINISHES	Black (BL), White (WH), or Polished Chrome (PC)
DIMMING	TRIAC/ELV/0-10
COLOR TEMP.	27K, 30K, 35K, 40K (30K Default)
FIXTURE WATTAGE	3W
INPUT VOLTAGE	120-277 VAC
LUMENS (measured at 3000K)	135 Lm
FIXTURE WEIGHT	1.0 lb. (0.45 kg)

FEATURES

- Stamped steel canopy (SP5), aluminum fascia canopy (SP2), acrylic light guide
- Damp location rated
- SP2 Canopy includes 8' of coaxial cable - connects to remote driver (not included)
- SP5 Canopy includes integral universal driver mounted to top of canopy



ORDERING GUIDE

SERIES

SGS

SGS - Surface
Globe Small

—

DIFFUSER

BU

BU - Bubble Acrylic
Globe

—

SIZE

03

03 - 3" Diameter

—

FINISH

BL - Matte Black
WH - White
PC - Polished Chrome

—

COLOR TEMP.

27K - 2700K
30K - 3000K
35K - 3500K
40K - 4000K
50K - 5000K
(30K Default)

—

WATTAGE

3W

3W - 3 Watts

—

MOUNTING

SP2 - 2" Canopy
SP5 - 5" Canopy

Example: SGS - BU - 03 - BL - 30K - 5W - SP5

Socket Color



Wattage (Lumens measured at 3000K)

3W = 3 Watts / 135 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).

Mounting

- SP2** = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)
Cable with modular connector (and optional wire harness) attaches to a remote driver
- SP5** = 5" round canopy with integral universal driver included (120-277V / TRIAC, ELV, 0-10V dimming), attaches to rear of canopy and sits inside ceiling-mounted junction box

