



TALL FROSTED LIGHT GUIDE PENDANT w/Brim

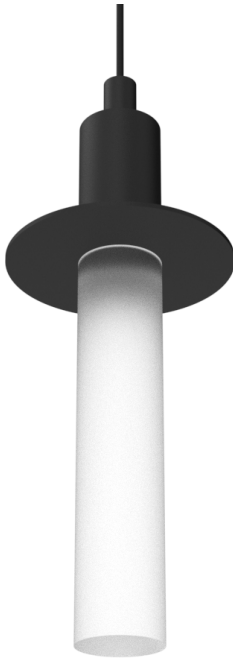

SPECIFICATIONS

Finish	Matte Black, White, or Polished Chrome
LED Color Temperature	Available in 2700K, 3000K, 3500K, and 4000K (3000K Standard)
Wattage	2 Watts / 86 Lumens - 3 Watts / 133 Lumens
Canopy Mounting	4.6" Dia. x 0.8"H (SP5 mounting option)
Driver Location	Integral in canopy, remote, or above canopy (depending on canopy selected)
Dimming	Universal (TRIAC, ELV, 0-10V)
Color Rendering Index	90CRI
Input Voltage	120-277V
Pendant Dimensions	3.0" Dia. x 7.1"H
Max. Cable Length	8' (for longer lengths, consult factory)

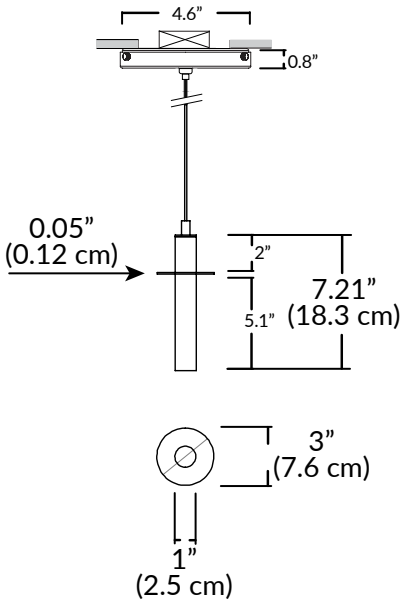


SP5 - 5" single canopy mounting option shown above.  
Additional mounting options on following pages.

ORDERING GUIDE

PRODUCT CODE									OPTIONS	
CATEGORY	SERIES	DIFFUSER	SIZE	SOCKET COLOR	CCT	WATTAGE	MOUNTING		CABLE LENGTH	
SP	LGR	TF	01							
SP Small Pendant	LGR Light Guide w/Brim	TF TallFrosted	01 1" Diameter	Standard BL - Matte Black WH - White PC - Polished Chrome Special Order BZ - Bronze SG - Satin Gold SS - Satin Silver	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K (30K Standard)	2W 2 Watts / 86 Lm 3W 3 Watts / 133 Lm	SP2 - 2.5" Canopy SP5 - 5" Canopy MPC - Multi-Port Canopy JTA - JackTrack		Indicate Cable Length in Inches - leave blank for default 096 = 96" (default) 300 = 300" (max.)	

Example Part Number: SP-LGR-TF-01-3W-30K-3W-SP5

Socket Color

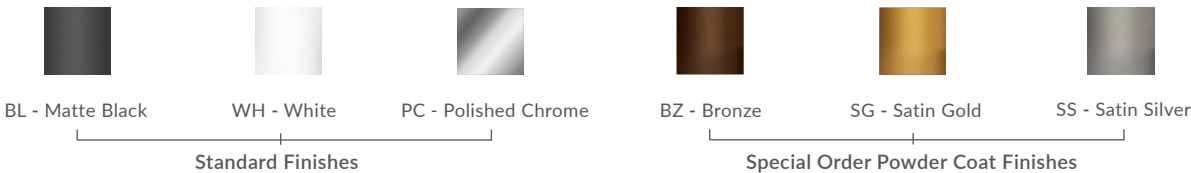

Wattage (Lumens measured at 3000K)

**2W** = 2 Watts / 86 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter).

**3W** = 3 Watts / 133 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).

Mounting


**SP5** = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box  
*Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)*

**SP2** = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)  
*Cable with modular connector (and optional wire harness) attaches to a remote driver*

**MPC** = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)  
*Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)*

MPC options include:  
Solo Systems, Duo Systems, Quatro Systems, and JackTrack Systems  
MPS, MPT, MPR, MQ, MD canopies

**JTA** = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)  
*Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter*

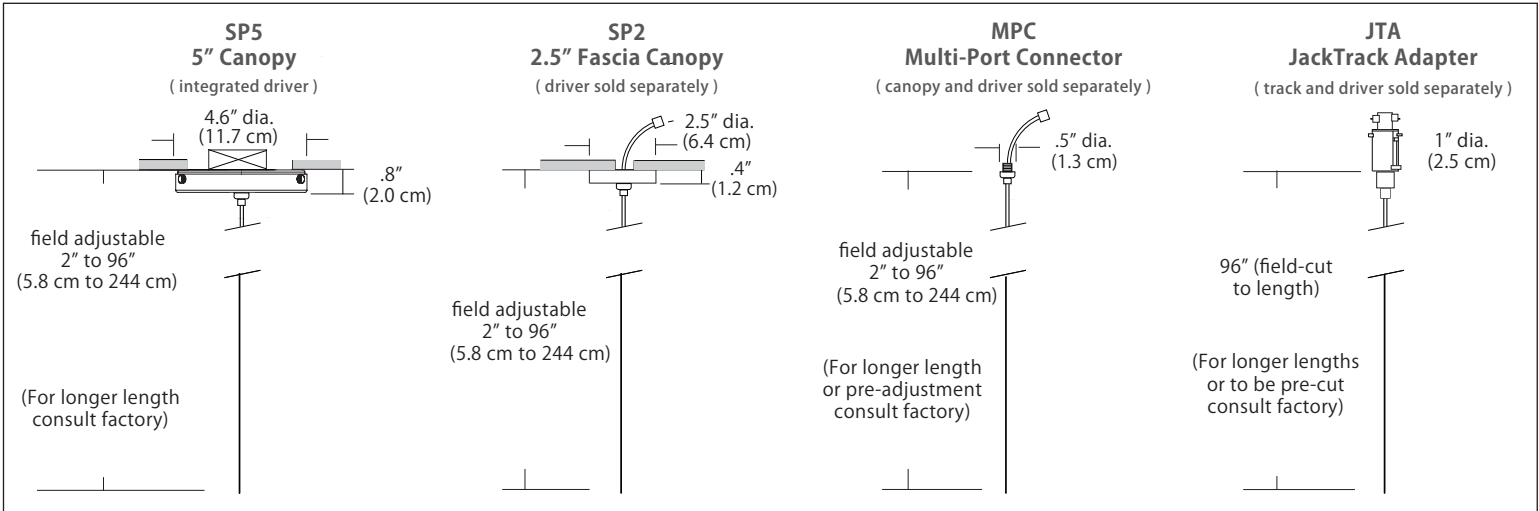
























Cable Length

**096** = 96" (Default Length).

**XXX** = Custom Length (300" = maximum length)

For Custom Lengths, please indicate length in inches.

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see [blackjack.com](http://blackjack.com).

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	<b>5" Canopy</b> Canopy and driver included with pendant	 5" dia. (12.7 cm)	 .8" (2 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	<b>2.5" Fascia Canopy</b> Canopy included with pendant. Driver sold separately.	 2.5" dia. (6.4 cm)	 .4" (1.3 cm) ( Remote Driver required)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPS MQ	<b>24" Multi-Port Square - 9 Port</b> C-MPS-2409-# MQ-2409-#  <b>24" Multi-Port Square - 25 Port</b> C-MPS-2425-# MQ-2425-#	 8" OC (20.3 cm) 23.9" (60.7 cm) 9 Port   4.8" OC (12.2 cm) 23.9" (60.7 cm) 25 Port	 21.5" 54.6 cm 2.5" (6 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPT MD	<b>38" Multi-Port Rectangle - 10 Port</b> C-MPT-3810-# MD-3810-#  <b>38" Multi-Port Rectangle - 18 Port</b> C-MPT-3818-# MD-3818-#	 7.5" OC (19 cm) 3" OC (7.6 cm) 37.7" (97.8 cm) 10 Port   4.1" OC (10.4 cm) 2.5" OC (6.4 cm) 37.7" (97.8 cm) 18 Port	 4.7" 11.9 cm 2.5" (6 cm) 6" 15.2 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPL	<b>22" Multi-Port Linear - 5 Port</b> C-MPL-2205-# MS-2205-#  <b>48" Multi-Port Linear - 11 Port</b> C-MPL-4811-# MS-4811-#	 4.4" OC (11.2 cm) 2.8" (7 cm) 21.8" (56 cm) 5 Port   4.4" OC (11.2 cm) 2.8" (7 cm) 48" (123 cm) 11 Port	 2.8" (7 cm) 1.4" (4 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPR	<b>10" Round - 3 Port</b> C-MPR-1003-#  <b>10" Round - 9 Port</b> C-MPR-1009-#	 11" dia. (27.9 cm) 7.4" OC (18.8 cm) 3 Port   11" dia. (27.9 cm) 2.9" OC (7.4 cm) 9 Port	 10" dia. (25.4 cm) 2.1" (5.3 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPR	<b>20" Round - 3 Port</b> C-MPR-2003-#  <b>20" Round - 12 Port</b> C-MPR-2012-#	 20" dia. (50.8 cm) 14.5" OC (36.8 cm) 3 Port   20" dia. (50.8 cm) 6.4" OC (16.3 cm) 12 Port	 18" dia. 45.7 cm 2.5" (6 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	<b>24" JackTrack</b>  <b>48" JackTrack</b>  <b>94" JackTrack</b>	 1.75" (4.5 cm) 23" (58.4 cm)   1.75" (4.5 cm) 47" (119.4 cm)   1.75" (4.5 cm) 94" (238.8 cm)	 1.38" (3.5 cm) 1.75" (4.5 cm) (Integrated or Remote Driver)	BL Matte Black WH White


For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see [blackjack.com](http://blackjack.com).

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


## Quattro

4S (4' 2x2 / 9 Port)  
MQ-2409-XX-4S-X-XXK

## Square Configurations

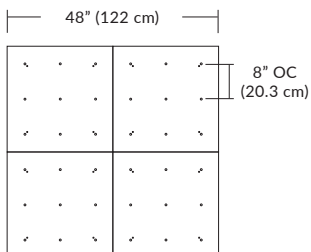


6S (6' 3x3 / 25 Port)  
MO-2425-XX-6S-X-XXK

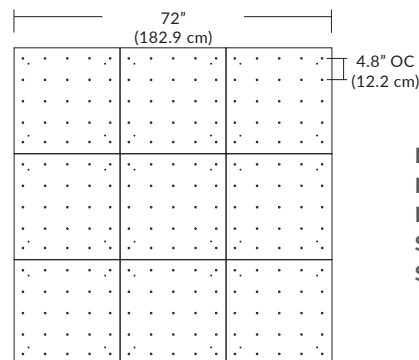


BL Matte Black  
PC Pol. Chrome  
BZ Bronze  
SG Satin Gold  
SS Satin Silver

## Linear Configurations

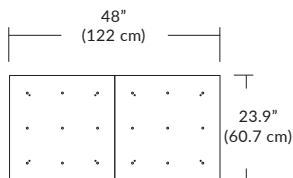

4L (4'x2' / 9 Port)  
MQ-2425-XX-4L-X-XXK


6L (6'x2' / 25 Port)  
MQ-2425-XX-6L-X-XXK

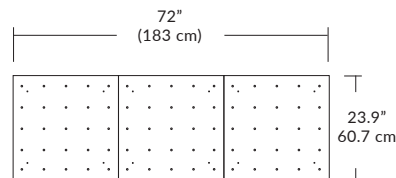


## Duo

6L (6'4"x6" / 10 Port)  
MD-3810-XX-6L-X-XXK

## Linear Configurations

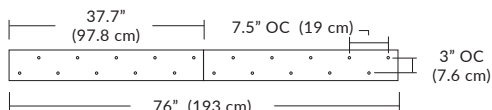


9L (9'6"x6"/ 18 Port)  
MD-3818-XX-9L-X-XXK

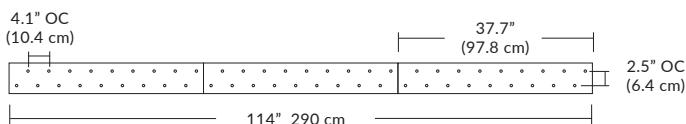


BL Matte Black  
PC Pol. Chrome  
BZ Bronze  
SG Satin Gold  
SS Satin Silver

## Solo

### Solo 48" Linear Configuration




### Solo (L) Configuration

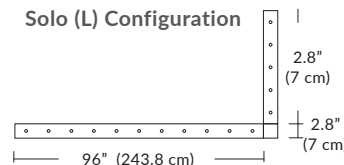

BL Matte Black  
PC Pol. Chrome  
BZ Bronze  
SG Satin Gold  
SS Satin Silver

### Solo 22" Grid Configuration

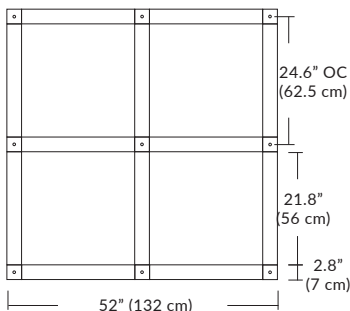

### Solo 48" Grid Configuration

