



BASELITE - HALO COLLECTION – LED – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	X	/	X	/	/	/	X	/	X	/	X	/
	A	B	C	D	E	F	G	H	I	J	K				
EXAMPLE:	HLO12	41	LCBLC	-	-	21W	3K	-	-	-	LDM120				

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



HLO22. 89G.3LCWHC.33WLED

A - SHADES

HALO COLLECTION

HLO12 – 21WLED (MAX)

HLO16 – 27WLED (MAX)

HLO22 – 33WLED (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)

(*SEE NOTES FOR LIMITATIONS*)

14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

LED CORD MOUNT

3LCBLC, 3LCWHC

F – LIGHT SOURCE

(SEE PAGE 2 FOR WATTAGE LIMITATIONS)

LIGHT EMITTED DIODE (LED)

15W, 18W, 21W, 26W, 27W, 33W

G – LED COLOR TEMP

(SEE SECTION G ON PAGE 2 FOR DETAILS.)

27K – 2700 KELVIN

3K – 3000 KELVIN

35K – 3500 KELVIN

4K – 4000 KELVIN

K – ELECTRICAL OPTION

(SEE SECTION F ON PAGE 2 FOR DETAILS.)

LDM120

LDM0-10

NOTES


(1). FINISH OPTIONS 75,76, 77, 83, 84, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.

(2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.

(3). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY \pm 0.25.

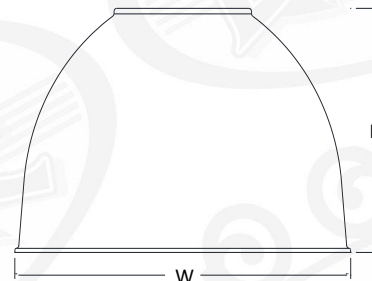

HLO12 H - 7.625" W - 12.5"

HLO16 H - 11" W - 16.5"

HLO22 H - 13.5" W - 22"



BASELITE HALO COLLECTION


PROJECT NAME: _____

PROJECT TYPE: _____


C - MOUNTING OPTIONS

LED CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 2" (H) 6" (W)
*CORD AND CANOPY COME IN THE SAME COLOR.



3LCBLC 8' BLACK CORD and CABLE (INCLUDES LED CANOPY)
3LCWHC 8' WHITE CORD and CABLE (INCLUDES LED CANOPY)

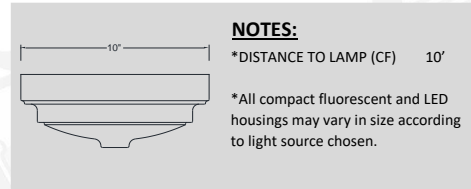

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)

LED 15W or 21W - HLO12
LED 18W or 27W - HLO16
LED 26W or 33W - HLO22

***IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / LED33W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED15W	15W	2500	80	120-277 VAC	TRIAC/0-10
LED18W	18W	3000	80	120-277 VAC	TRIAC/0-10
LED21W	21W	3258	80	120-277 VAC	TRIAC/0-10
LED26W	26W	4100	80	120-277 VAC	TRIAC/0-10
LED27W	27W	4163	80	120-277 VAC	TRIAC/0-10
LED33W	33W	5088	80	120-277 VAC	TRIAC/0-10

@4000K

K – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY.

LED DIMMING OPTIONS

(LED10WF – ONLY AVAILABLE WITH **LDM120** - TRI-ELV DIMMING OPITON) ALL OTHER WATTAGES CAN CHOOSE FROM THE OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR FURTHER SPECIFICATIONS.

LDM120 - TRIAC / ELV – INPUT 120 / 277V - DIMMING AT 120 VOLT ONLY

LDM0-10V – 0 – 10V – DIMMING AT 120 / 277 VOLTS