



BASELITE – WOOD HANDLE – LED– SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	x	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K
EXAMPLE:	W513	41	BLC	BB	43	12W	27K	-	-	44	LDM120

NOTES:



TRD.WH3.54.BLC.BB.100INC

A - SHADES

WOOD HANDLE

TRD.WH3 - 25WLED(MAX)
TR.WH3 - CALL MANUFACTURER
TR2.WH3 - CALL MANUFACTURER
CNW16.WH4 - 25WLED(MAX)
W510.WH6 - 12WLED(MAX)
W513.WH3 - 12WLED(MAX)
D514.WH5 - 25WLED(MAX)
CGBW10.WH2 - CALL MANUFACTURER
SCPW10.WH2 - CALL MANUFACTURER
S5.CA57.WH1 - CALL MANUFACTURER
S3.GS08.WH1 - CALL MANUFACTURER
S3.WG6.WH1 - CALL MANUFACTURER

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)

14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB,
 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40,
 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51,
 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64,
 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79,
 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91,
 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

LED CORD MOUNT
LBLC, LWHC

D – MOUNTING ADD-ONS

BB – BRASSH BUSHING

E – MOUNTING COLOR

SEE SECTION “B” FOR COLOR
 OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
LIGHT EMITTED DIODE (LED)
10W, 12W, 25W

*NOTE – MAX WATTAGE IS LISTED NEXT TO
 THE SHADE MODEL NUMBER IN SECTION “A”.
 ALL WATTAGES BELOW THAT ARE ALSO
 AVAILABLE FOR THE SAME MODEL NUMBER.

G – LED COLOR

27K – 2700 KELVIN
3K – 3000 KELVIN
35K – 3500 KELVIN
4K – 4000 KELVIN
5K – 5000 KELVIN

H – GLASS OPTION

*ONLY AVAILABLE FOR THE TR & TR2
 OPTIONS.
FR– FROSTED WHITE GLASS
FC – FROSTED CHARCOAL BLACK GLASS

I - ACCESSORIES

CERTAIN FIXTURES AVAILABLE UPON
 REQUEST, CALL FACTORY FOR
 DETAILS.

J – ACCESSORY COLOR

SEE SECTION “B” FOR COLOR
 OPTIONS.

K – ELECTRICAL OPTION

LDM120
LDM277
LDM0-10

NOTES

- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
 - (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE.
 - (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
 - (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
- *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
- *FIXTURE DIMENSIONS MAY VARY ± 0.25.
- *CORD AND CANOPY COME IN THE SAME COLOR.




A – SHADES

WOOD HANDLE SHADE SERIES

*FIXTURE COMES AS SHOWN WITH WOOD HANDLE


*CUSTOM FIXTURES AVAILABLE UPON REQUEST, CALL FACTORY FOR DETAILS.



TRD.WH3 H-13" W-9"


TR.WH3 H-13" W-9"

*TRD- ALUMINUM SHADE
*TR- GLASS SHADE




TR2.WH3 H-15.5" W-12"

*TR2 - GLASS SHADE




W513.WH3 H-11" W-13"




CGBW10.WH2 H-13.5" W-9.5"

*CGBW10 - GLASS SHADE




SCPW10.WH2 H-10.5" W-10"


*SCPW10 - GLASS SHADE



CNW16.WH4 H-20" W-16"

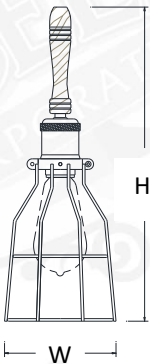


S5.CA57.WH1 H-14.75" W-5.25"




S3.GS08.WH1 H-14" W-8"


*S3.GS08 - GLASS SHADE



S3.WG6.WH1 H-14" W-5"



D514.WH5 H-12" W-14"



W510.WH6 H-9.5" W-10"



BASELITE - WOOD HANDLE COLLECTION

PROJECT NAME: _____
PROJECT TYPE: _____


C - MOUNTING OPTIONS

LED CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



LBLC 8' BLACK CORD (INCLUDES LED CANOPY)
LWHC 8' WHITE CORD (INCLUDES LED CANOPY)



NOTES:

*DISTANCE TO LAMP (CF) 10'

*All compact fluorescent and LED housings may vary in size according to light source chosen.

D - MOUNTING ADD-ONS

CORD ADD-ONS

* CORDS COMES STANDARD WITH A PLASTIC BUSHING IF BRASS BUSHING IS NOT DESIRED



BB BRASS BUSHING

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)

LED 12W (MAX)- W513.WH3, WH510.WH-WL
LED 25W (MAX)- TRD.WH3, CNW16.WH4, D514.WH5
CALL MANUFACTURER- TR.WH3, TR2.WH3, CGBW10.WH2, SCPW10.WH2, S5.CA57.WH1, S3.GS08.WH1, S3.WG6.WH1

***IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE MAX WATTAGE AVAILABILITY. **EXAMPLE: / LED25W /**

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED10WF	10W	1280	>90	120-277 VAC	TRI-ELV *120V ONLY
LED12W	12W	1481	>90	120-277 VAC	See section "H"
LED25W	25W	2812	>90	120-277 VAC	See section "H"

@3500K

K – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION, PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

LED DIMMING OPTIONS

(LED10WF – ONLY AVAILABLE WITH **LDM120** - TRI-ELV DIMMING OPITON) ALL OTHER WATTAGES CAN CHOOSE FROM THE OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR FURTHER SPECIFICATIONS.

LDM120 - TRIAC / ELV – INPUT 120 / 277V - DIMMING AT 120 VOLT ONLY

LDM0-10V – 0 – 10V – DIMMING AT 120 / 277 VOLTS