

# NOEMIE GRANDE SCONCE

KSW1171

## General Product Information



Intertek




STANDARD  
INSTALLATION



INDOOR



DAMP LOCATION  
SAFE



NEC COMPLIANT  
JUNCTION BOX



DIMMER  
COMPATIBLE



CLEAN WITH SOFT,  
DRY CLOTH ONLY -  
NO HARSH CHEMICALS!



SAVE THESE  
INSTRUCTIONS!

## Tools Required



ELECTRIC DRILL



PHILLIPS-HEAD  
SCREWDRIVER



FLATHEAD  
SCREWDRIVER

## Safety Information

### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



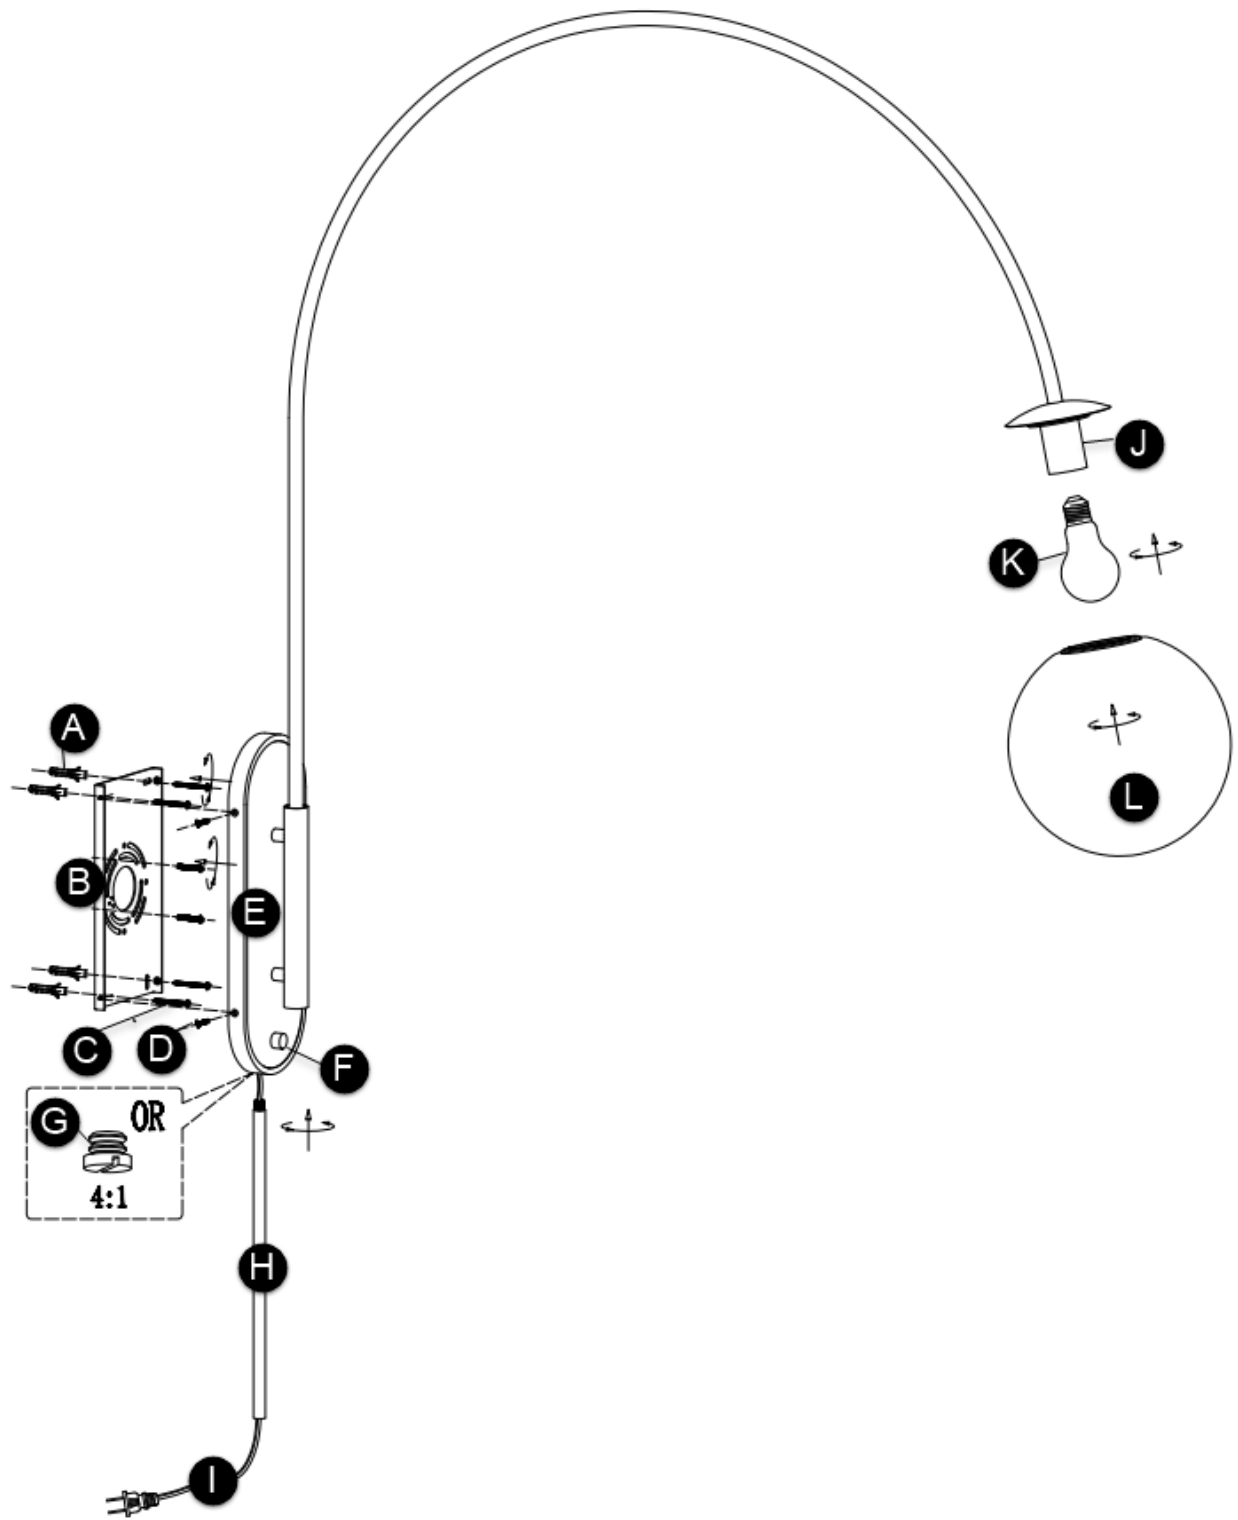

## FIXTURE PARTS

A. Anchors	D. Fixture Screws	G. Fixture Plug	J. Socket
B. Mounting Plate	E. Fixture Base	H. Stem (Optional)	K. Lamp
C. Anchor Screws	F. On/Off Switch	I. Electric Cord/Plug	L. Fixture Globes/Shades

# INSTRUCTIONS

## Junction Box Mounting

### I. Preparing the Fixture

1. Separate the mounting plate from the fixture base by removing the fixture screws.
2. Install the anchors as follows:
  - a) Place the mounting plate on the junction box to trace and mark the locations for the anchor holes. Ensure that they are leveled.
  - b) Use an electric drill to drill the marked holes.
  - c) Insert the anchors into the holes.
3. Use the anchor screws to secure the mounting plate onto the junction box.

### I. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Disconnect the cord wires from the fixture wires by removing the wire nuts.
3. Carefully pull the cord out of the fixture.
4. Close the cord hole using the provided fixture plug.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
7. Carefully tuck all the wires behind the mounting plate into the junction box.

### II. Installing the Fixture

1. Mount the fixture onto the mounting plate and secure it in place by tightening the fixture screws.
2. Screw the bulb into the socket, referring to the label on the socket for Max Wattage information.
3. Affix the globe/shade onto the fixture.
4. Turn switch on/off to test.

## Or Plug-In Cord Mounting

### I. Preparing the Fixture

1. Separate the mounting plate from the fixture base by removing the fixture screws.
2. Install the anchors as follows:
  - a) Place the mounting plate on the junction box to trace and mark the locations for the anchor holes. Ensure that they are leveled.
  - b) Use an electric drill to drill the marked holes.
  - c) Insert the anchors into the holes.
3. Use the anchor screws to secure the mounting plate directly onto the wall.

### II. Installing the Fixture

1. Affix the stem onto the fixture base.
2. Secure the fixture base onto the mounting plate using the fixture screws.
3. Screw the bulb into the socket, referring to the label on the socket for Max Wattage information.
4. Affix the globes/shades onto the fixture.
5. Plug in the cord to nearby electrical socket.
6. Turn switch on/off to test.