

# CERNE MEDIUM FLUSH

KWFM19327

## General Product Information



## Tools Required



**NOTE:** This fixture can be used as a flush mount or a wall sconce.

## Safety Information

**SAVE THESE INSTRUCTIONS!**

### CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

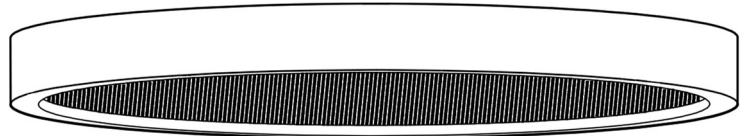

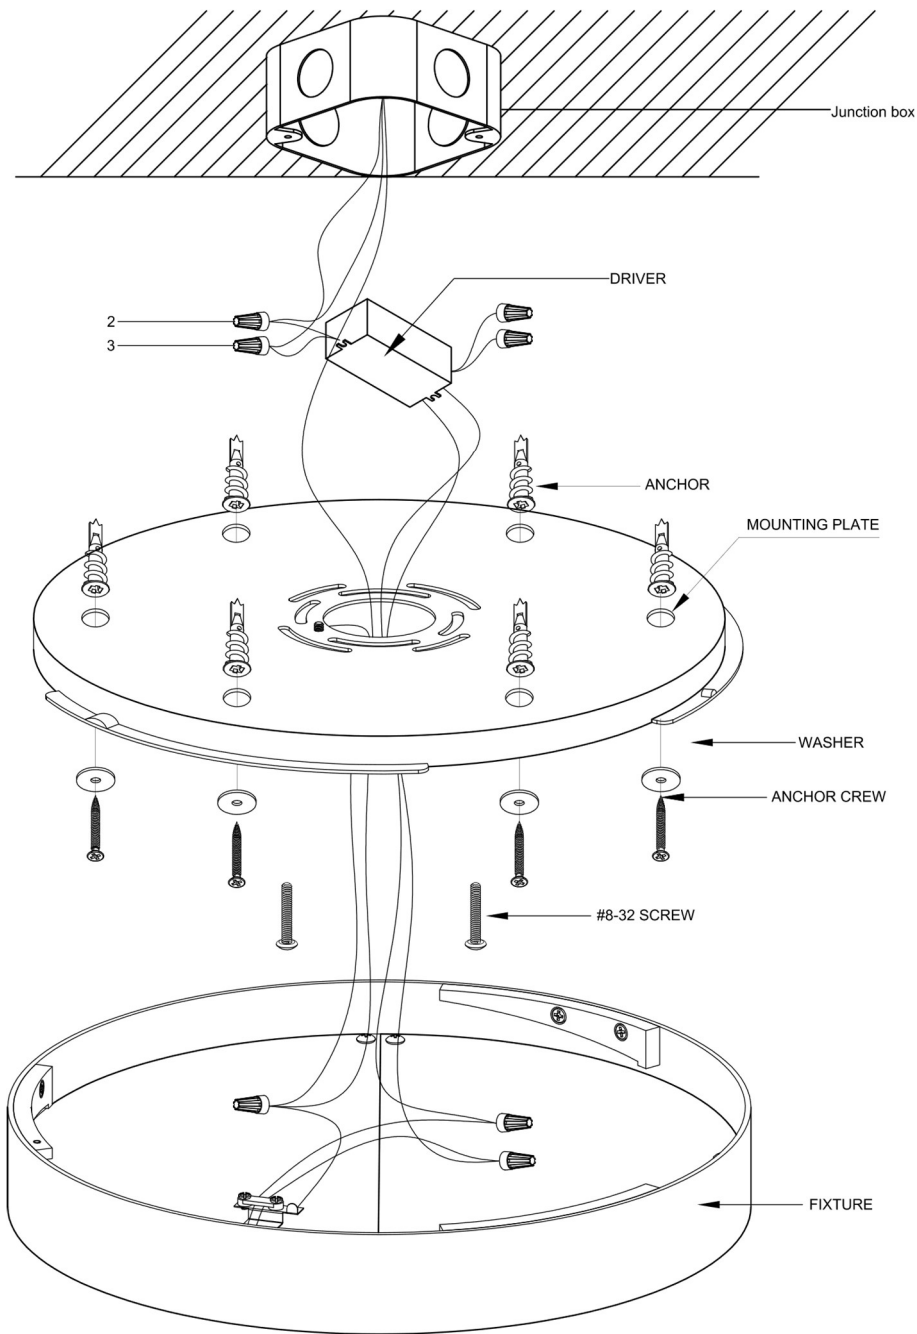

## INSTRUCTIONS

### I. Preparation

1. Remove the mounting plate from the fixture by turning it counterclockwise.

### II. Wiring the Fixture

1. Connect the following wires using a wire nut:
  - a) Input driver wire (white) to the neutral power line wire
  - b) Input driver wire (black) to the hot power line wire

### III. Additional Preparation

1. Place the driver into the junction box, ensuring that the driver output wires and the ground wire are accessible.
2. Install the mounting plate to the junction box with the two #8-32 screws (included).

3. Line up an anchor tip with the center of an anchor hole, then push the anchor into the ceiling up to the threads.
4. Screw the anchor in the rest of the way with a Phillips-head screwdriver.
5. Repeat steps #3-4 for the remaining anchors.
6. Slide an anchor screw through a washer and screw it into an anchor to secure the mounting plate to the ceiling.
7. Repeat step #6 for the remaining anchor screws.

#### IV. Continuing the Wiring

1. Connect the fixture to a suitable ground in accordance with local electrical codes.
2. Connect the following wires using a wire nut:
  - a) Negative (-) fixture wire to the negative (-) output driver wire
  - b) Positive (+) fixture wire to the positive (+) output driver wire
3. If using 0-10V dimming, connect the purple and pink wires to a compatible dimmer. If you are not using 0-10V dimming, make sure to cap off these wires.

#### V. Installing the Fixture

1. Neatly place the wires and wire nut connections inside the fixture.
2. Apply label **931CERNEF** to the ceiling and align radially with label **931CERNED (Location A)** on the mounting plate.
3. Apply label **931CERNEA** to the outside of the housing and align the arrow (on the left) with label **931CERNEB (Location B)** inside the housing.
4. When installing the housing, line up the arrow (on the left) with label **931CERNEE (START POINT)** on the mounting plate.
5. Rotate the housing until the right arrow passes the locked arrow on the label applied to the ceiling.
6. Remove the labels from the outside of the housing and ceiling.