

Linea 56 Two & Three-Tier Chandeliers

KWCH705; KWCH704

General Product Information



ETL LISTED
Intertek



SAVE THESE INSTRUCTIONS!



STANDARD INSTALLATION



INDOOR



DAMP LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



INTEGRATED LED
NO BULBS REQUIRED



DIMMABLE
(LED, ELV, TRIAC & 10V)



ADAPTABLE TO SLOPED CEILINGS



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES




Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



MEASURING TAPE



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

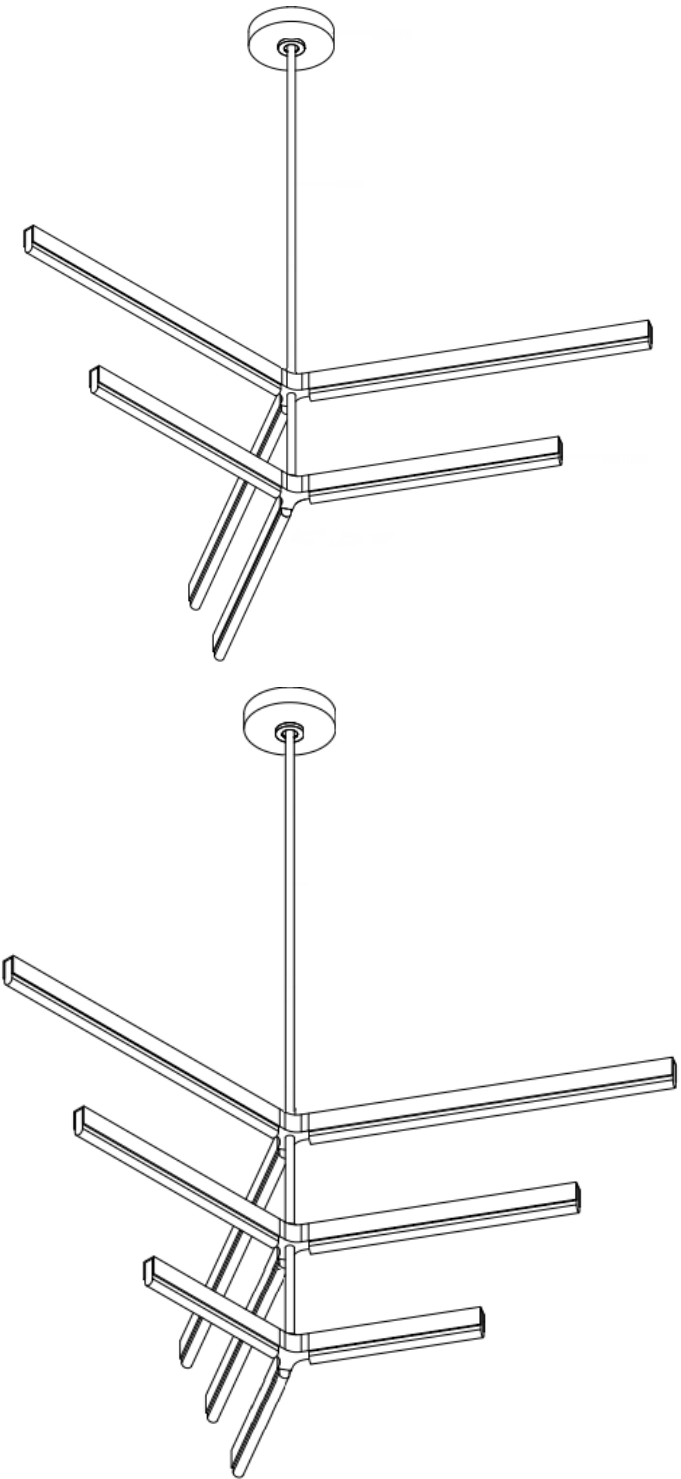

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Drivers (2)
- D. Mounting Plate with Screw Collar
- E. Anchors
- F. Washers
- G. Anchor Screws
- H. #8-32 Screws
- I. Safety Cable
- J. Cable Grip with Set Screws (Not Illustrated)
- K. Half Ball Assembly
- L. Canopy
- M. Collar Nut
- N. Stem Assembly
- O. Fixture
- P. Alabaster LEDs
- Q. Adjustable Fixture Tier
- R. Second Adjustable Fixture Tier (KWCH705 Only)

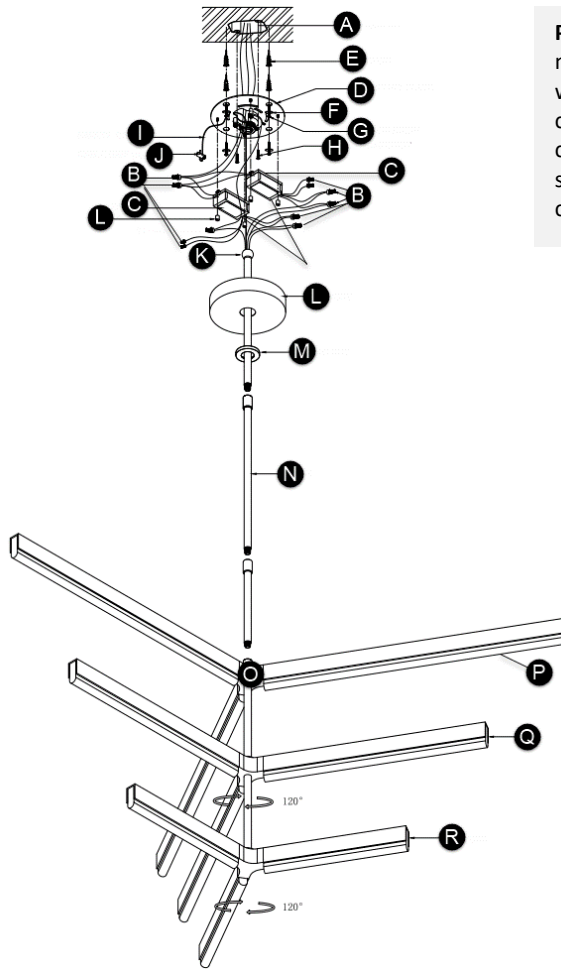

Please Note: The LED portion of this fixture is made from alabaster and should be treated with care. Regular dusting with a soft, dry cloth is recommended. Water and harsh cleaning agents can damage the material's surface. If the fixture requires more intensive cleaning, consult a professional.

Please Note: It is best to have a second person assist with the installation steps described below.

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture.
2. Use the mounting plate to trace and mark the locations for the anchors. Drill a hole at the marked locations to fit the anchors into.
3. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together.
4. Feed the fixture wires and safety cable through the stem assembly, collar nut, canopy, and half ball assembly.
5. Next, screw the stem assembly on top of the fixture. Then screw the half ball assembly on the stem assembly.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Secure the mounting plate with screw collar to the junction box using the #8-32 screws. Then slide the washers through the anchor screws and screw them into the anchors to secure the mounting plate directly to the ceiling.
3. Slide the half ball assembly onto the screw collar portion of the mounting plate.
4. Pull the safety cable up and down through the mounting plate, feed it through cable grips, and secure it to the mounting plate by tightening the set screws.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Connect the LED drivers input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wires (white) to neutral power line wire
 - b) Hot driver wires (black) to hot power line wire
7. Now, twist the bare ends of the following pairs/groupings of wires together using a wire nut to secure a connection:
 - a) Negative (-/blue) fixture wire to negative (-) output driver wire
 - b) Positive (+/red) fixture wire to positive (+) output driver wire
7. Carefully tuck all the wires below the mounting plate. Lift the canopy and place the drivers on the canopy.
8. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
9. Adjust the angles (up to 60° degrees in each direction) of the fixture tier(s) to preference.