
ALDER & ORE

Assembly Instruction Beacon Spotlight BRIP580092

FM09-SPT-BRS

parts enclosed:

Item	Description	Q'ty
A	Metal cross plate	1
B	screw	3
C	Metal ceiling plate	1
D	Swivel part	1
E	Metal cup	1
F	bulb	1
G	Metal tube	6″ *1; 12″ *1
	Wire connector	3
	Long screw	2

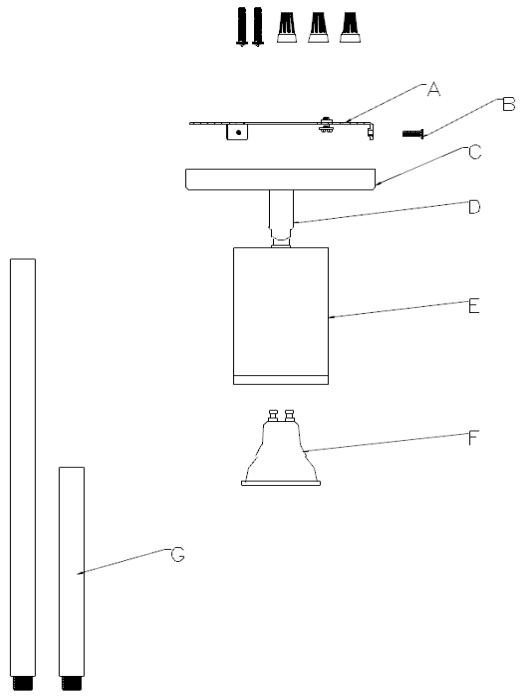

Important Safety Instructions:

READ ALL THE INSTRUCTIONS BEFORE INSTALLATION. INSTALLATION BY A QUALIFIED ELECTRICIAN IS RECOMMENDED. ALL PARTS MUST BE USED AS INDICATED.

1. Shut off power at the circuit breaker and remove the existing fixture, including the mounting hardware.
2. To avoid the risk of fire do not exceed the recommended wattage.

Caution:

1. All wires are connected. Do not remove the fixture from packaging by pulling on the wires as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

Assembly:

1. Carefully unpack your new fixture, remove all protective coverings and lay out all the parts on a clear area. Take care not to lose any small parts.
2. Turn OFF power at the outlet box where the fixture will be installed.
3. Loose the screws(B) on the metal ceiling plate (C) first by screwdriver, and then attach the metal cross plate (A) to the outlet box, tighten the long screw into the metal cross bar's hole with a screwdriver. Ensure the side of the A marked "GND" or green screw in facing out.

Assembly 1: Without optional extension rod (G Metal tube)

4. Holding the spot light body connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a wire connector. Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (B). DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED AND WARRANTY VOIDED.
5. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a wire connector. If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on Metal cross plate (A)
6. Tighten the metal ceiling plate (C) onto the metal cross plate (A) using the screw (B).
7. Loose the metal cup (E) by hand until it separates from the swivel part (D), and then fit on the bulb (F); Then, screw the metal cup (E) onto the swivel part (D) by hand.
8. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch to activate the fixture.


ALDER & ORE

Assembly Instruction Beacon Spotlight BRIP580092

FM09-SPT-BRS

parts enclosed:

Item	Description	Q'ty
A	Metal cross plate	1
B	screw	3
C	Metal ceiling plate	1
D	Swivel part	1
E	Metal cup	1
F	bulb	1
G	Metal tube	6″ *1; 12″ *1
	Wire connector	3
	Long screw	2

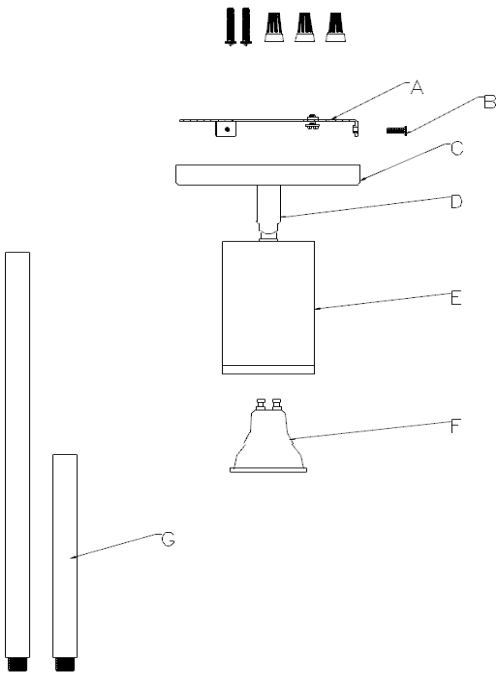

Assembly:

Assembly 2: For use with extension rod(s) (G Metal tube)

1. Follow assembly instructions 4-6 on the previous page.
2. Loose the nub on the Metal ceiling plate (C) using a wrench to separate the Metal ceiling plate (C) and the swivel (D). Select the extension rod(s) (metal tube G), both may be used, per your requirements. Thread wire through the extension rod/metal tube (G), and screw on the metal tube (G) with Swivel part (D) by hand.
3. Let the metal tube (G) across the hole of metal ceiling plate (C) , put the nut you loose previous and tightened by the wrench.
4. Continue with steps 4-8 on the previous page to complete.