





VETRO 13, 21 & 27 PENDANTS

SLPD62427; SLPD62527; SLPD62327

General Product Information



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



MEASURING TAPE



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

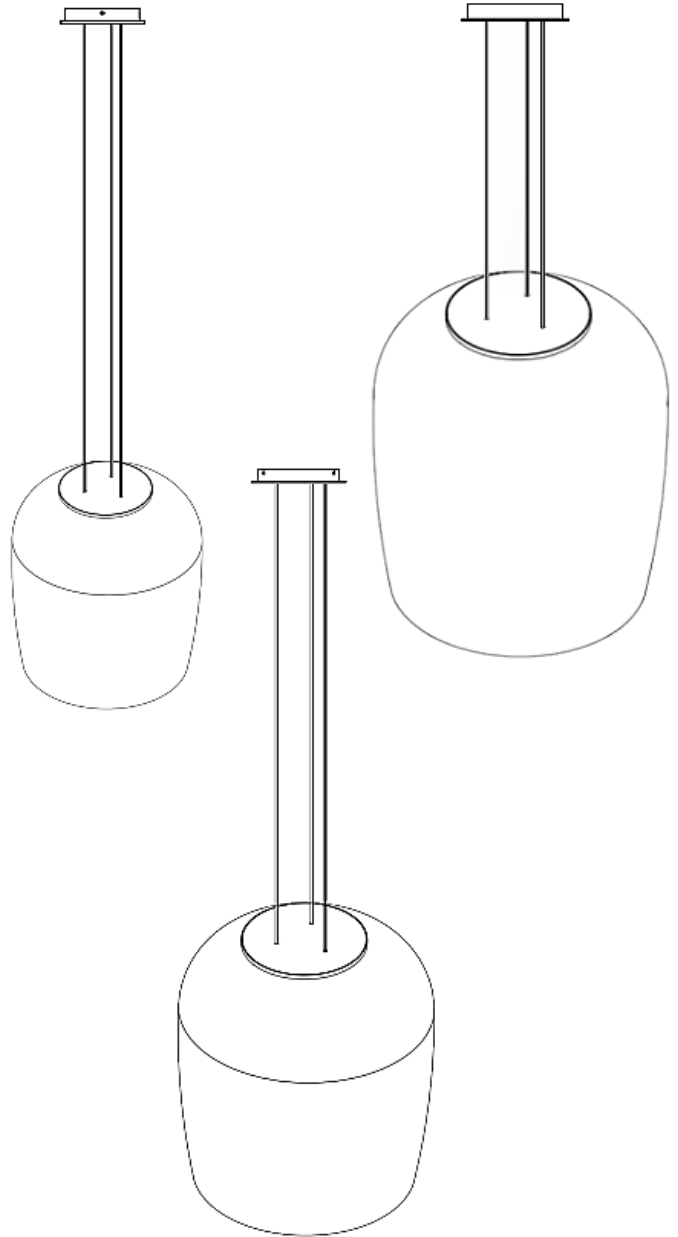

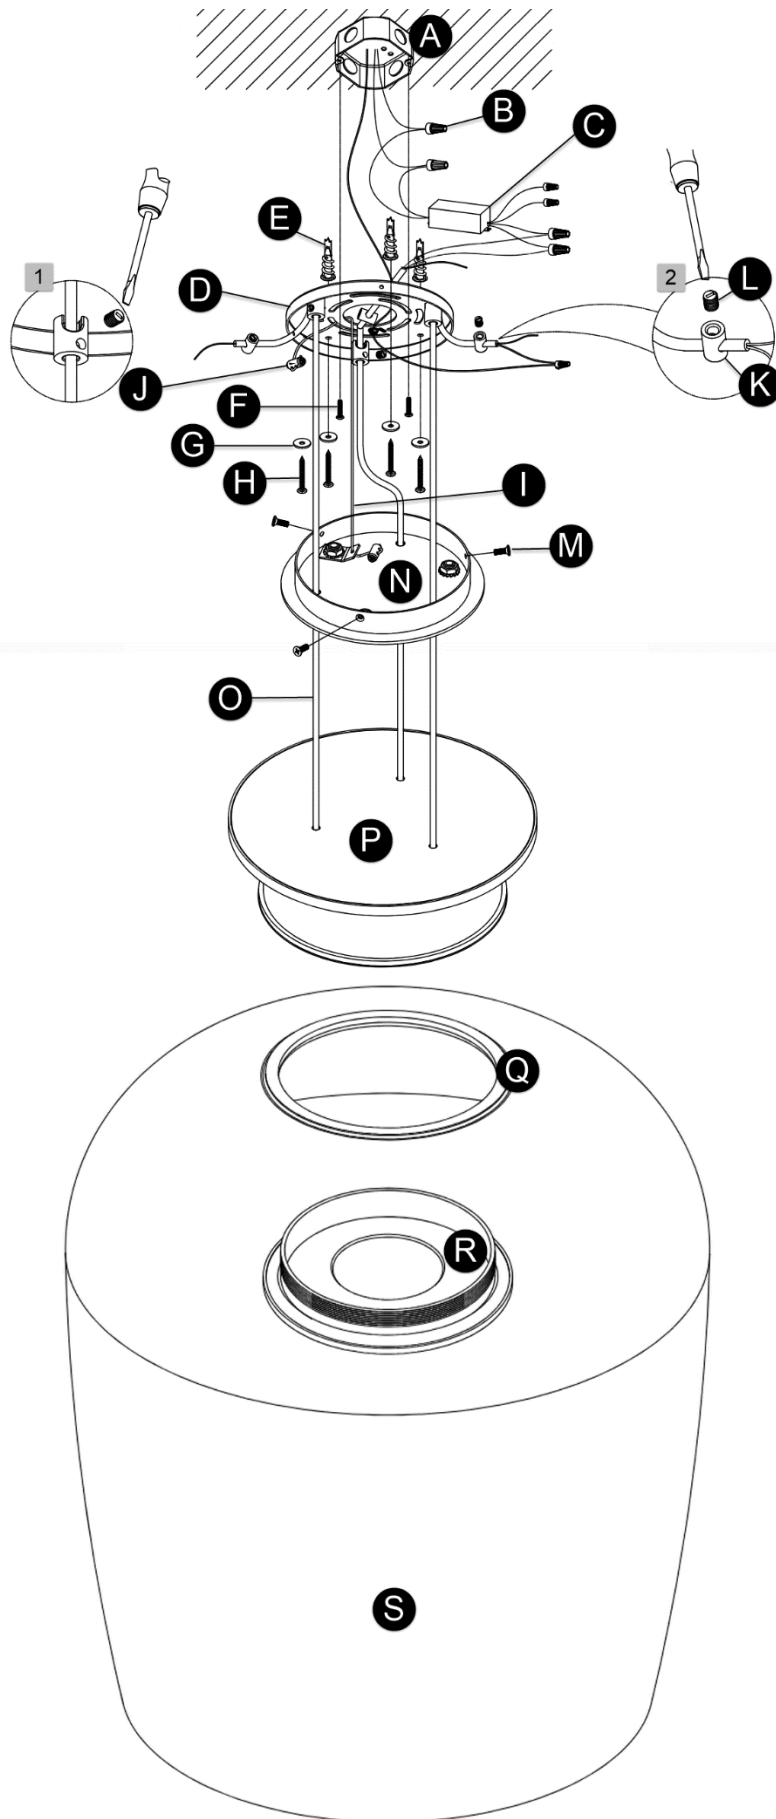

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Anchors
- F. #8-32 Screws (2)
- G. Washers
- H. Anchor Screws
- I. Safety Cable
- J. Cable Grip
- K. Strain Reliefs
- L. Set Screws
- M. Flathead Screws
- N. Canopy
- O. Fixture Cables
- P. Fixture with LED
- Q. Glass Shade Top Opening
- R. Glass Holder
- S. Glass Shade

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture. This fixture's shade is made of glass and fragile; it should be treated accordingly.
2. Use the mounting plate to trace and mark the locations for the anchors. Drill a hole at the marked locations to fit the anchors into.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not in use.
4. Place the driver in the junction box, ensuring the output driver wires are accessible.
5. Install the mounting plate to the junction box using the provided #8-32 screws. Then slide the washers through the anchor screws and screw them into the anchors to secure the mounting plate directly to the ceiling.

III. Preparing the Fixture Cables

1. Determine the desired height of the fixture and adjust each cable as follows:
 - a) Measure and mark the length of the cables equally and pull them through the canopy.
 - b) Pull the cables through the mounting plate to raise the fixture to the determined height.
 - c) Feed the cables through the strain relief.
 - d) Tighten the screws on the mounting plate to secure them (see #1 on fixture illustration).
 - e) Secure the strain relief to the end of the cable and close to the mounting plate to prevent the cable from sliding (see #2 on fixture illustration).
2. Attach the glass shade to the fixture and secure it in place with the glass holder.

IV. Continue Wiring the Fixture

1. Loop and secure the safety cable over a stable structure that agrees with local building codes.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to negative (-) output driver wire (blue)
 - b) Positive (+) fixture wire to positive (+) output driver wire (red)
4. Carefully tuck all the wires behind the mounting plate and into the junction box.

V. Installing the Fixture

1. Place the canopy onto the mounting plate and secure it in place with the fixture screws.