





POZA 40, 64 & 56 CHANDELIERS

SLCH781; SLCH746; SLLS747

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE




This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.


Install and use this product in adherence with local electrical codes and regulations.

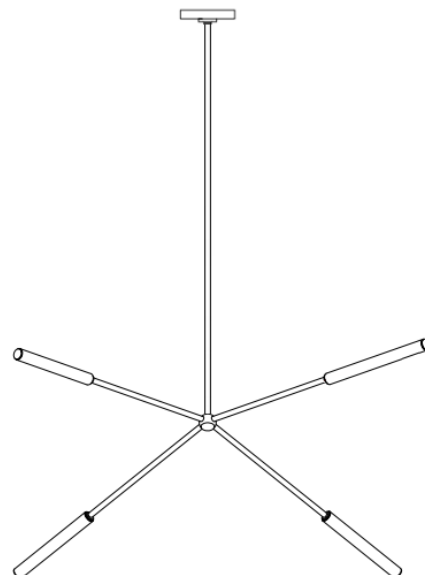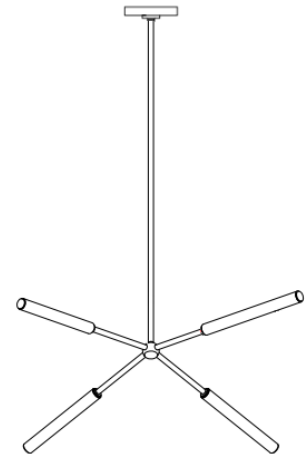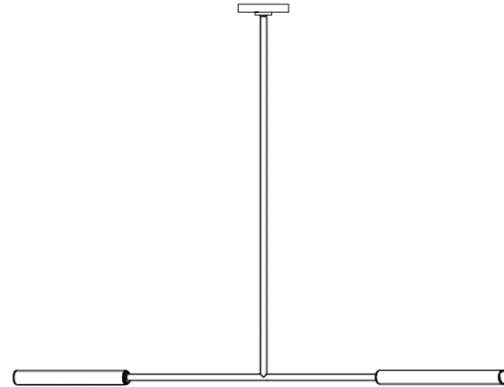

Installation without mounting bracket:

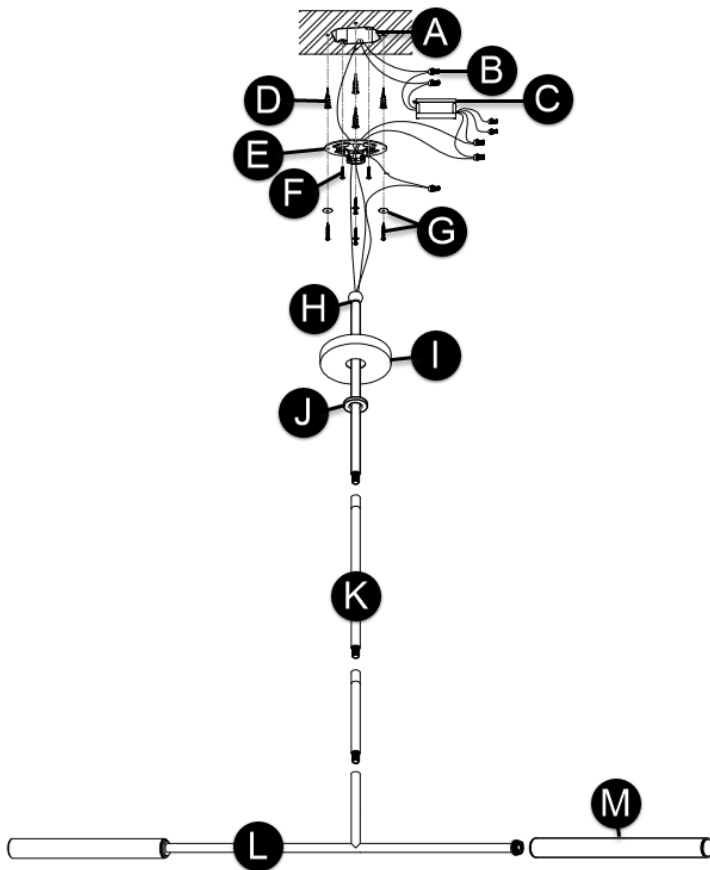

Installation with mounting bracket:

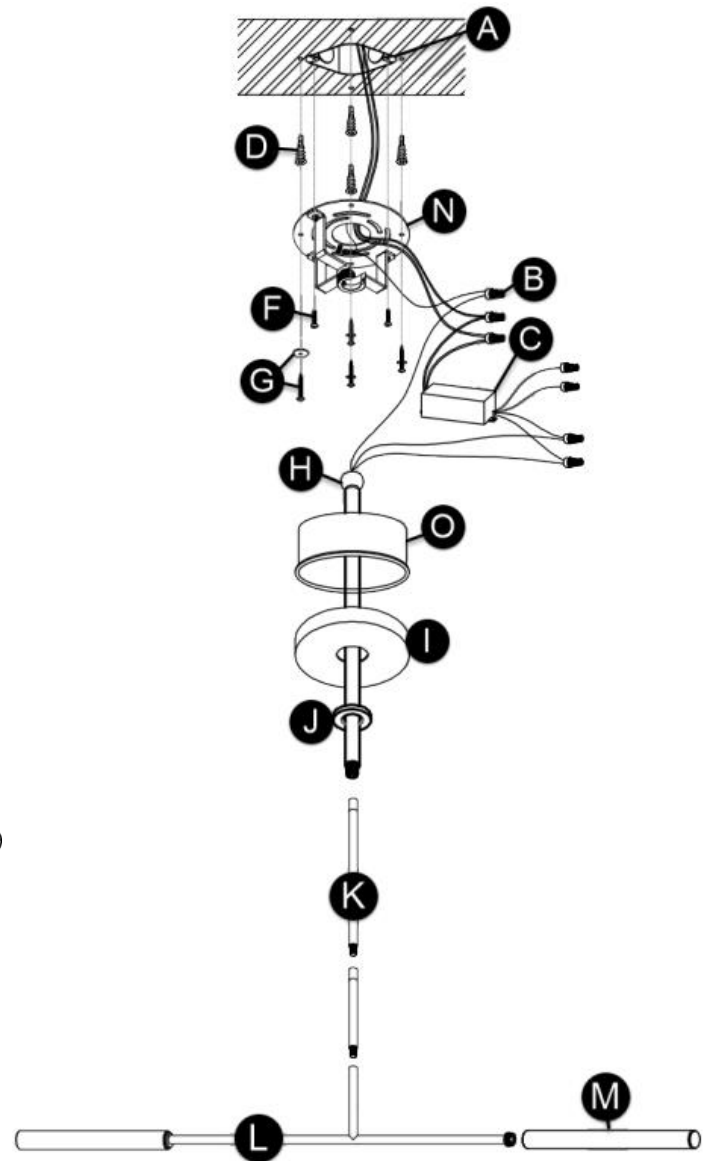

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Driver
- D. Anchors
- E. Mounting Plate
- F. Mounting Screws
- G. Washers & Anchor Screws
- H. Half-Ball Assembly
- I. Canopy
- J. Collar Nut
- K. Stem Assembly
- L. Fixture Arms
- M. Light Guides
- N. Mounting Bracket (Optional)
- O. Metal Ring (Optional)

INSTRUCTIONS (Option 1: Installation with Driver in Junction Box/Illustration 1)

I. Preparing the Fixture

1. Unbox and inspect all items included in the fixture's packaging. Handle the glass dome with care to prevent damage.
2. If necessary, separate the mounting with screw collar from the canopy by removing the collar nut.
3. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together.
4. Feed the fixture wires and safety cable through the stem assembly, collar nut, canopy, and half ball assembly.
5. Screw the stem assembly on top of the fixture. Then screw the half ball assembly on the stem assembly.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. Ensuring the driver output wires are accessible, secure the mounting plate with screw collar to the junction box using the mounting screws.
4. Slide the half ball assembly onto the screw collar portion of the mounting plate.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (- / blue) fixture wire to the negative (-) output driver wire
 - b) Positive (+ / red) fixture wire to the positive (+) output driver wire
8. Carefully tuck all the wires behind the mounting plate into the junction box.
9. Push the canopy onto the mounting plate and secure it in place with the collar nut.
10. Screw the light guides onto the ends of the fixture arms to complete the installation.

INSTRUCTIONS (Option 2: Installation with Driver in Mounting Bracket/Illustration 2)

I. Preparing the Fixture

1. Unbox and inspect all items included in the fixture's packaging. Handle the glass dome with care to prevent damage.
2. If necessary, separate the mounting plate with screw collar from the canopy by removing the collar nut.
3. Locate the mounting bracket and secure it to the junction box using the mounting screws.
4. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together.
5. Feed the fixture wires and safety cable through the stem assembly, collar nut, canopy, metal ring, and half ball assembly.
6. Next, screw the stem assembly on top of the fixture. Then screw the half ball assembly on the stem assembly.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Slide the half ball assembly onto the mounting bracket.
3. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting bracket, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
4. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
5. Place the driver in the mounting bracket, ensuring the output driver wires are accessible.
6. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (- / blue) fixture wire to the negative (-) output driver wire
 - b) Positive (+ / red) fixture wire to the positive (+) output driver wire
7. Carefully tuck all the wires behind the mounting bracket into the junction box.
8. Remove the thumb screws and washers from the fixture and set them aside.
9. Push the metal ring and the canopy onto the mounting plate and secure it in place with the collar nut.
10. Screw the light guides onto the ends of the fixture arms to complete the installation.