

Wall MonoRail Single Feed

700WMOP_

1.7



POWER FEED CANOPIES

GENERAL PRODUCT INFORMATION:



This fixture is intended to be installed utilizing NEC compliant junction boxes with a minimum depth of 2".


Minimum volume of the junction box must be 6 cubic inches (98 cubic centimeter).

This product is suitable for indoor dry locations only.



NOTE: The remote transformer should be installed prior to these steps. Refer to the instructions provided with the remote transformer.


Install the 2" Square Power Feed Canopy

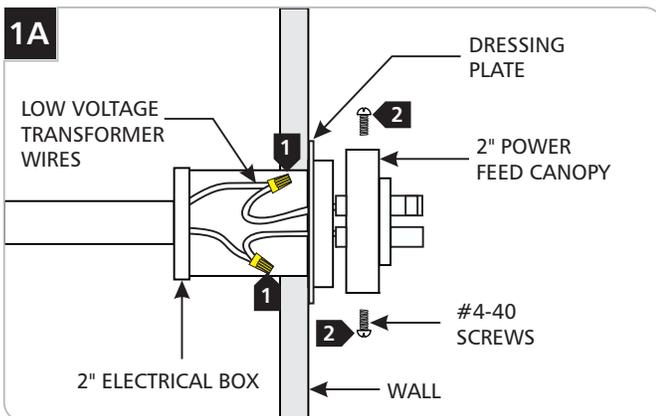

NOTE: 2" Electrical box should be installed prior to these steps. Refer to the instructions provided with the 2" electrical box.

- 1 Connect the power feed canopy wires to the low voltage wires coming from the remote transformer in the 2" electrical box with wire nuts.
- 2 Mount the 2" square canopy to the 2" electrical box with the two #4-40 screws.


Install the 4" Round Power Feed Canopy

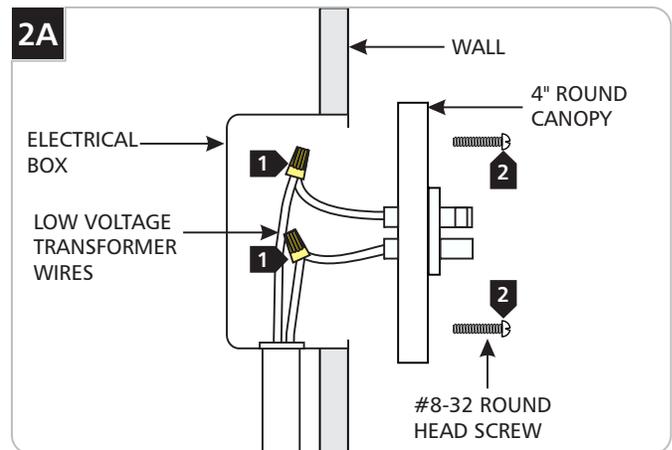


- 1 Connect the power feed canopy wires to the low voltage wires coming from the remote transformer in the electrical box with wire nuts.
- 2 Mount the 4" round power feed canopy to the electrical box with the two #8-32 screws.

NOTE: Use the provided universal round crossbar when the canopy holes do not line up with the electrical box holes.

Install the Rectangular Power Feed Canopy

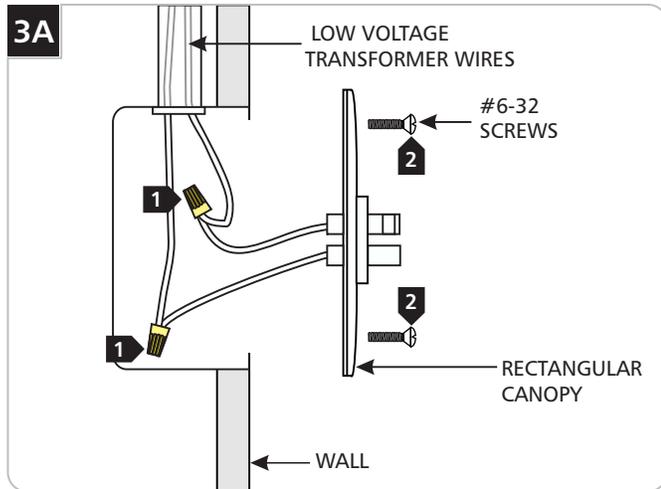


- 1** Connect the power feed canopy wires to the low voltage wires coming from the remote transformer in the electrical box with wire nuts.
- 2** Mount the rectangular power feed canopy to the electrical box with the two #6-32 screws.

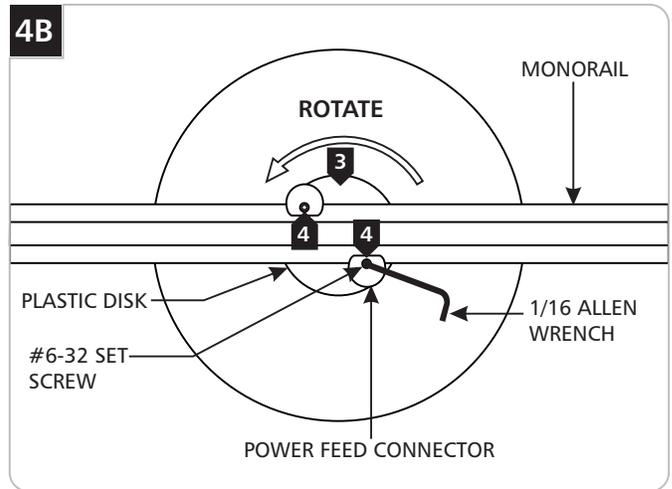

- 3** Rotate the plastic disk so that the power connector slots slide over the MonoRail.
- 4** Hold the power connectors in position and tighten the #6-32 set screws with the 1/16 Allen wrench.

Connecting the MonoRail to Wall MonoRail Power Feed Canopy

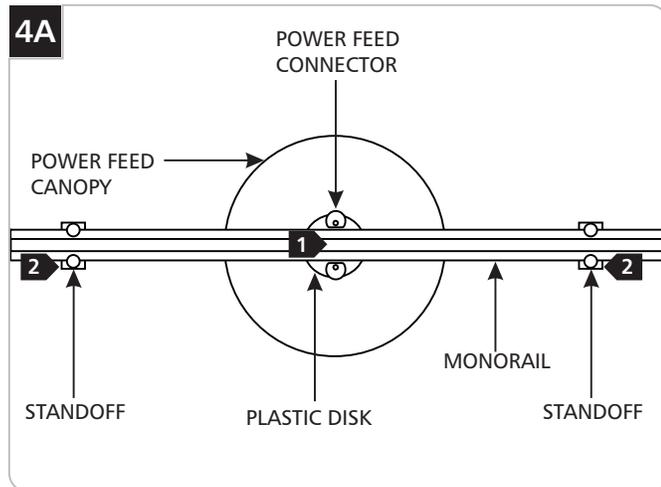

- 1** The Wall MonoRail standoffs and the power feed canopy should be inline so that the MonoRail runs through the center point of the power feed canopy plastic disk.
- 2** Connect the MonoRail to the standoffs (refer to the Wall MonoRail standoff instructions).

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.
A Generation Brands Company