
HUXE

Assembly Instructions TITAN GLOBE FLUSH MOUNT SERIES BXHP576724

Parts Enclosed:

Item	Description	Qty
A	Mounting plate	1
B	Short screw	2
C	Metal part	1
D	Bulb (not included)	0
E	Glass	1
	Wire connector	3
	Long screw	2

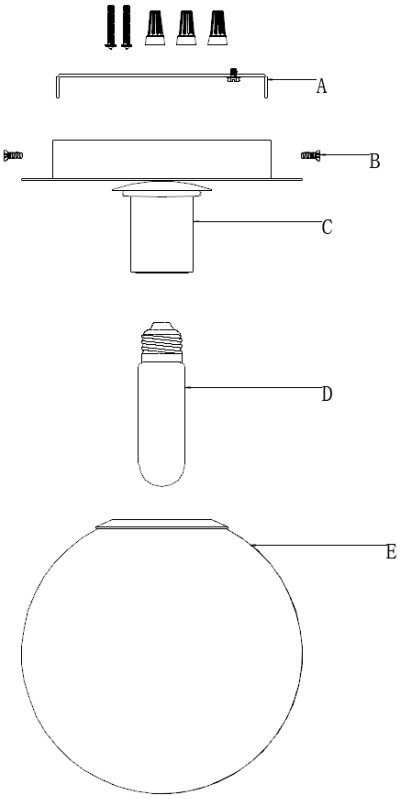

Important Safety Instructions:

READ ALL THE INSTRUCTIONS BEFORE INSTALLATION. INSTALLATION BY A QUALIFIED ELECTRICIAN IS RECOMMENDED. ALL PARTS MUST BE USED AS INDICATED.

1. Shut off power at the circuit breaker and remove the existing fixture, including the mounting hardware.
2. To avoid the risk of fire do not exceed the recommended wattage.

Cautions:

1. All wires are connected. Do not remove the fixture from packaging by pulling on the wires as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

Assembly:

1. Carefully unpack your new fixture, remove all protective coverings and lay out all the parts on a clear area. Take care not to lose any small parts.
2. Turn OFF power at the outlet box where the fixture will be installed.
3. Attach the Mounting Plate (A) to outlet box, tighten the long screw in to the mounting plate's hole with a screwdriver. Ensure the side of the Mounting Plate (A) marked "GND" or the green screw is facing out.
4. While holding the Metal part (C), connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a wire connector. Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (B). DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED AND WARRANTY VOIDED.
5. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a wire connector. If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on the Mounting Plate (A).
6. Tuck these wire connections neatly into the outlet box, raise the Metal part (C) over Mounting Plate (A) and align the holes on the Metal part (C) with the corresponding holes on the Mounting Plate (A), secure the Metal part (C) with short screw (B) until the fixture is secured to the ceiling.
7. Install the proper light bulb (not included) in accordance with the fixture's specifications (DO NOT EXCEED THE SPECIFIED WATTAGE RATING).
8. Screw the glass (E) onto the Socket's tooth pattern slowly until tighten.
9. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch to activate the fixture.