

# CHC2167


## ASSEMBLY & INSTALLATION GUIDE

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

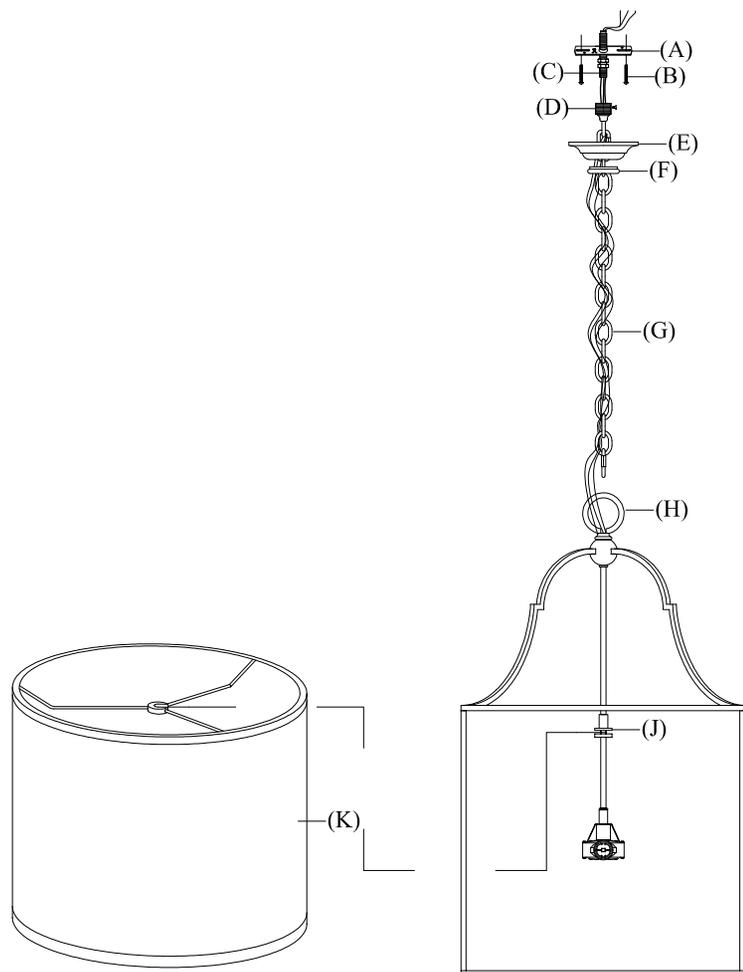

1. Slide shade spider (locate inside of shade (K)) on threaded section in between the ring (J) and secure by turning ring (J) in clockwise direction.
2. Attach chain (G) to top loop (H) on lantern box.
3. Feed wire through chain (G) and chain mounting loop (D).
4. Slide canopy (E) and canopy ring (F) on chain (G).
5. Attach mounting strap (A) to ceiling outlet box and secure with mounting screws (B).
6. Insert top thread nipple (C) in mounting strap (A).
7. Attach chain mounting loop (D) to thread nipple (C).
8. Attach chain (G) with fixture to chain mounting loop (D) at desired height.
9. Attach the ground wire (bare wire) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
10. Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
11. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical type. Be sure that no wire strands are exposed.  
**DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
12. Tuck the wire connections neatly into the ceiling outlet box.
13. Slip canopy (E) to ceiling and secure with threaded canopy ring (F).
14. Insert light bulbs into the sockets.
15. Restore power and test fixture. Enjoy your ceiling fixture.