


ASSEMBLY INSTRUCTIONS

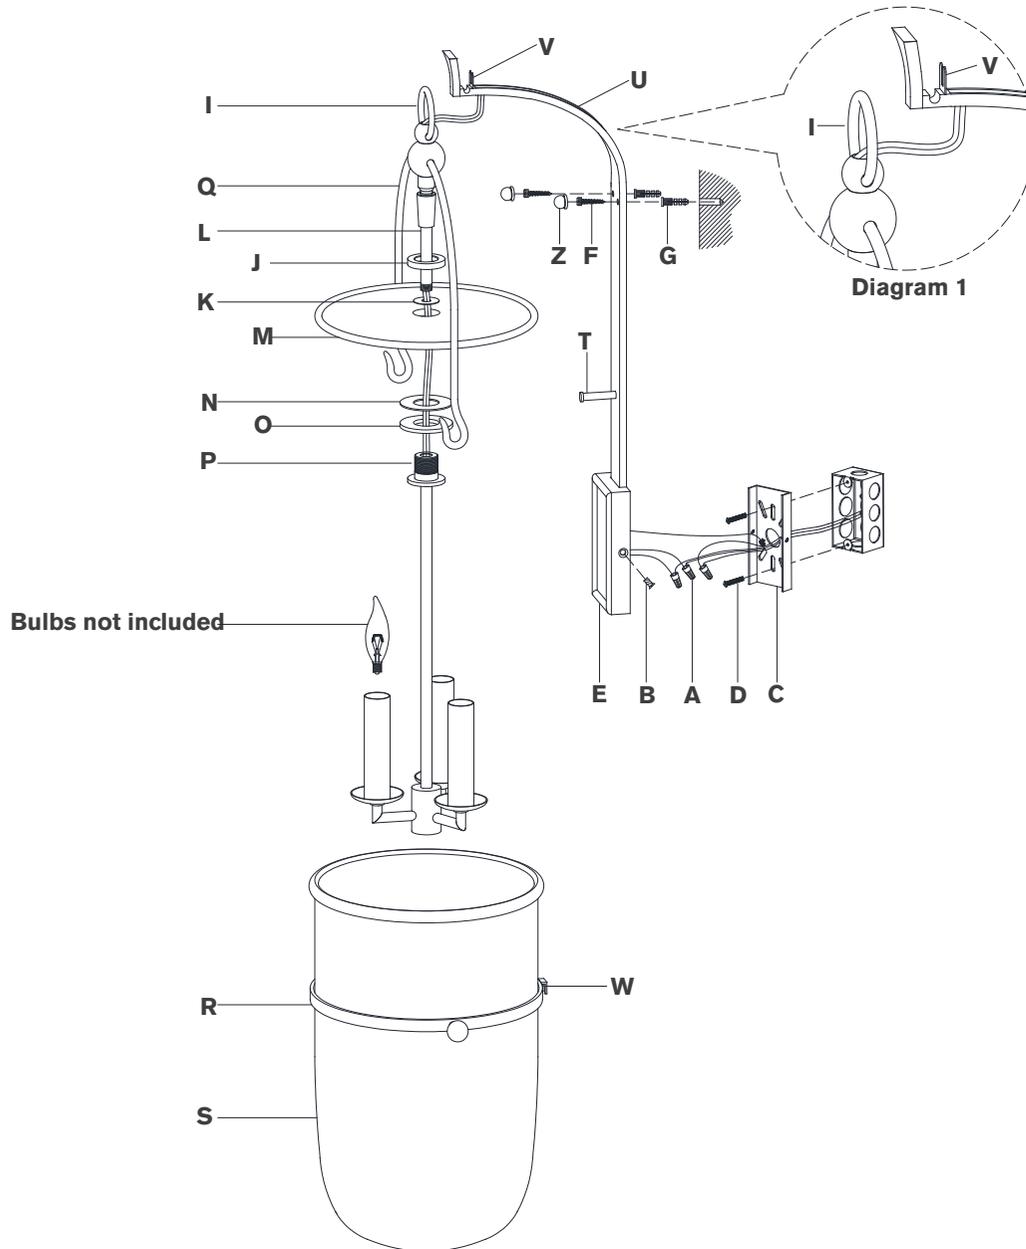

Lorford Medium Sconce

Item # CHD 2270

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Drill
Measuring tape	Pencil	Hammer

- Carefully remove all parts from the box. Place on a clean, soft surface.
- Remove mounting plate (C) from backplate (E) by removing screws (B).
- Using backplate (E) as a guide, mark anchor positions.
NOTE: Carefully measure distance between mounting points for mounting plate (C) and arm (U) before moving to the next step.
- Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (G) into the holes using hammer.
- Install mounting plate (C) to the junction box and secure with mounting screws (D).
- Feed fixture wires through metal washer (O), rubber washer (N), glass diffuser (M), rubber washer (K), check ring (J) and tube (L).
- Attach metal washer (O), rubber washer (N) and glass diffuser (M) to the connector (P) and secure with the rubber washer (K) and check ring (J).
NOTE: Do not over-tighten, otherwise glass could become damaged.
- Thread tube (L) to connector (P).
- Hang fixture loop (I) to arm (U) and secure by bending metal tabs (V). See diagram 1.
- Feed fixture wires through hole and down groove on back of arm (U) until wires exit backplate (E).

ASSEMBLY INSTRUCTIONS

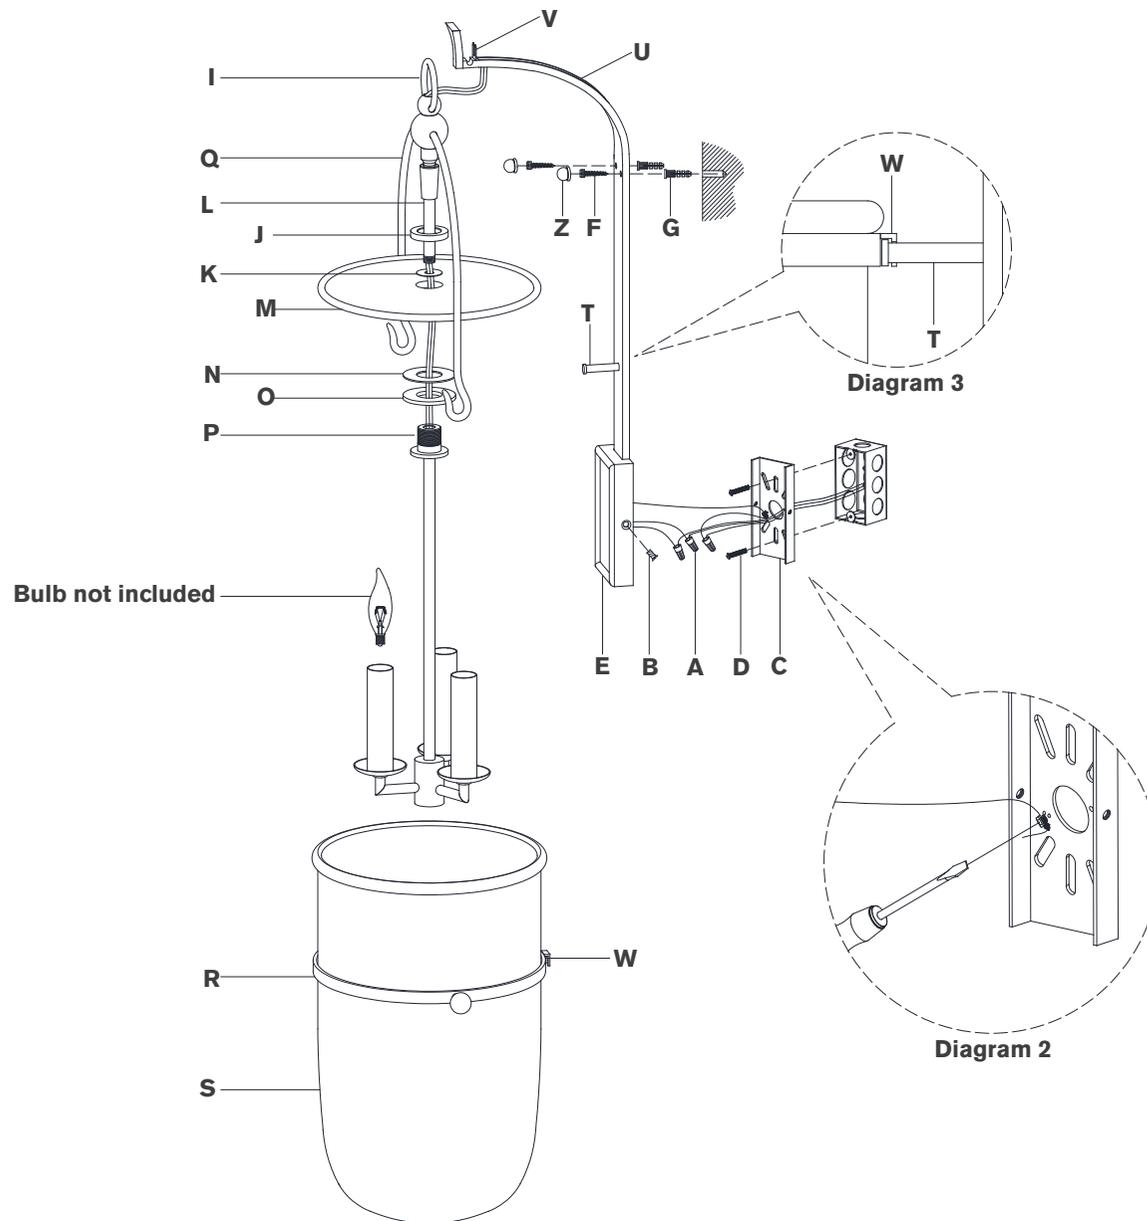

Lorford Medium Sconce

Item # CHD 2270

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 2). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (A).

NOTE: It is imperative that the fixture is grounded.

12. Connect fixture neutral wire ((ribbed) to the supply neutral wire (usually white) using wire nut (A).
13. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut (A).

CAUTION: Do not reverse the hot and neutral connections.

14. Make sure all wire connections are tight, then carefully tuck into the junction box.
15. Install backplate (E) to mounting plate (C) and secure with screws (B). then secure wood screws (F) to anchors (G).
16. Install threaded caps (Z) to wood screws (F).
17. Install light bulbs into the sockets.
18. Gently place glass shade (S) into metal ring (R), then align notch (W) to post (T) and hang to hooks (Q). See diagram 3.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.