


ASSEMBLY INSTRUCTIONS

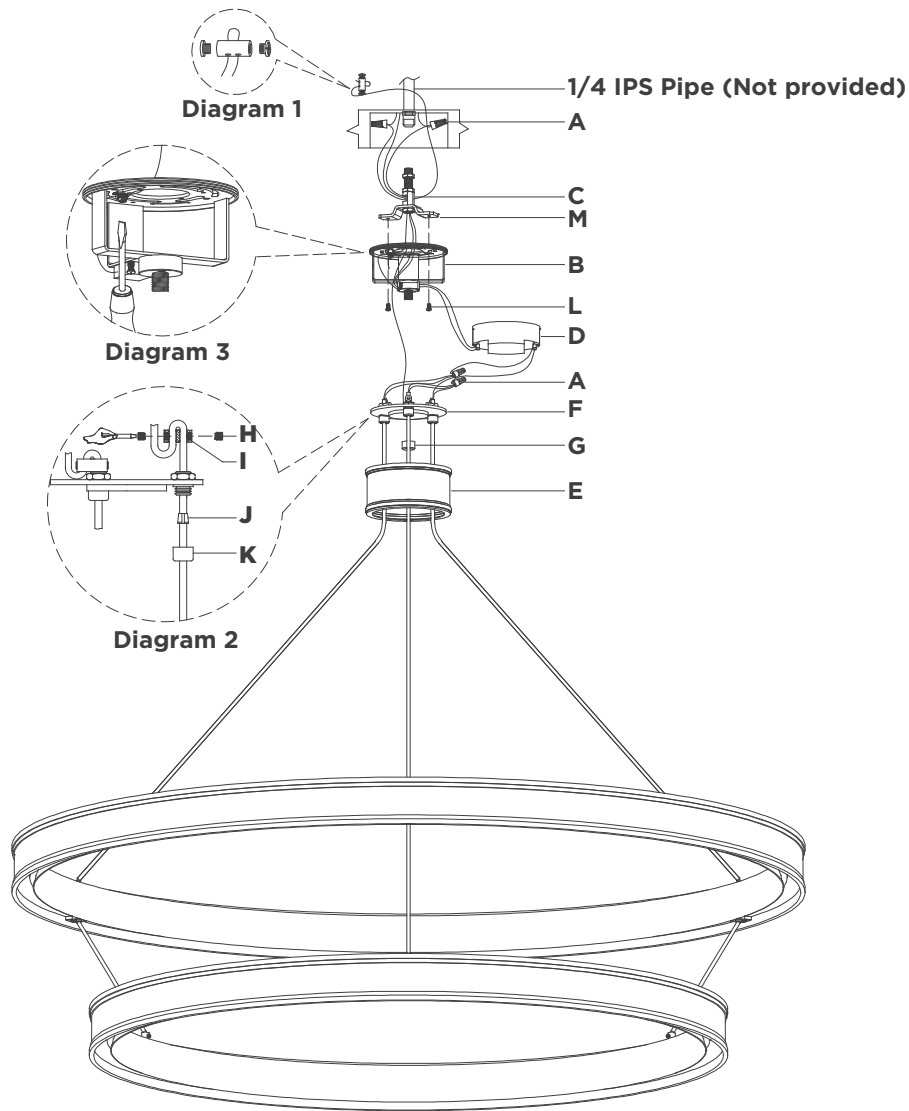

Connery 50" Two-Tier Ring Chandelier

Item # CHC1619

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Wire Cutters	Measuring Tape	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy **(E)** from mounting plate **(B)** by unscrewing.
3. Remove mounting plate **(B)** from metal plate **(F)** by removing collar ring **(G)**.
4. Remove mounting bracket **(M)** from mounting plate **(B)** by removing screws **(L)**.
5. Remove hickey **(C)** from mounting bracket **(M)** by removing hex nut.
6. It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building. Then install hickey **(C)** into threaded pipe and tighten with wrench.
NOTE: Item must be supported independent of the junction box due to hanging weight.
7. Install threaded nipple to hickey **(C)**, then install mounting bracket **(M)** to threaded nipple by tightening locknut.
8. Install mounting plate **(B)** to mounting bracket **(M)** and secure with screws **(L)**.
9. Unscrewing cap nuts **(K)** and stopper **(J)** from metal plate **(F)**, then feed hanging wires through canopy **(E)**, cable nuts **(K)**, stoppers **(J)** and metal plate **(F)** (see diagram 1).

ASSEMBLY INSTRUCTIONS

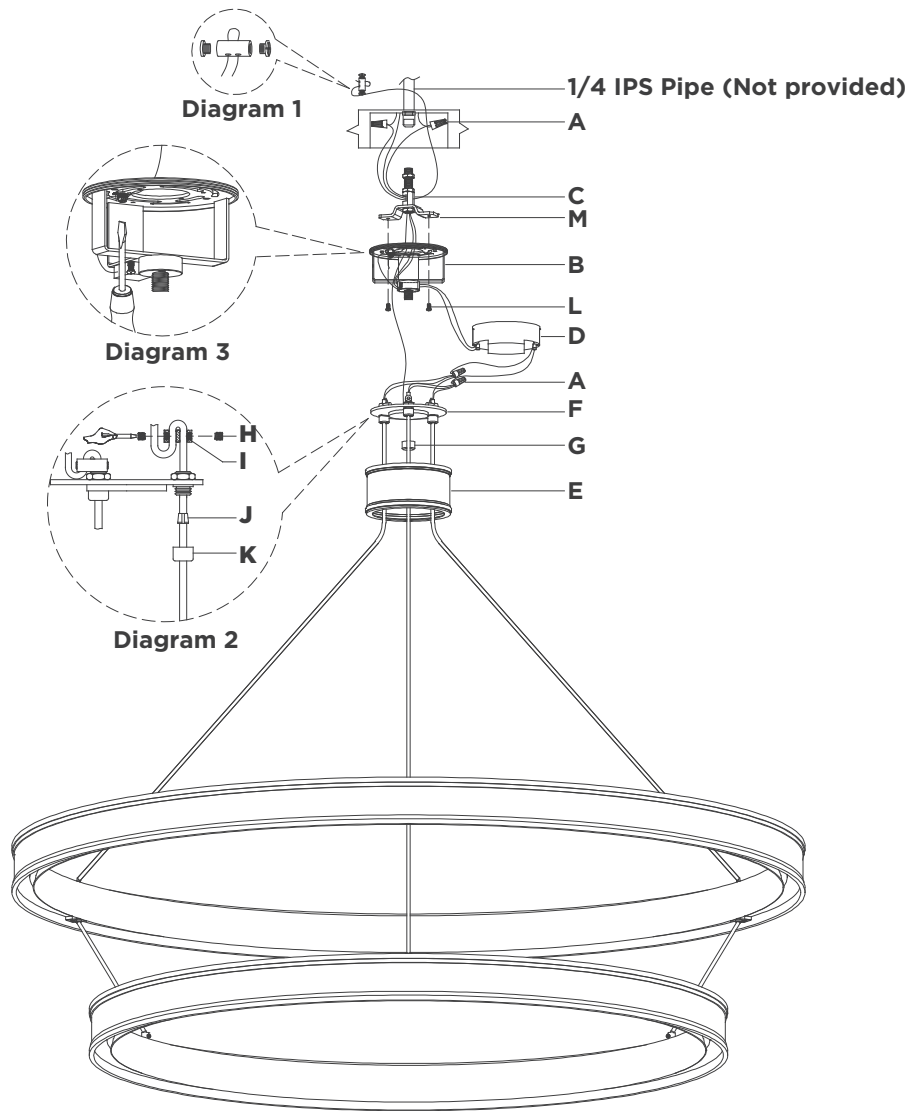

Connery 50" Two-Tier Ring Chandelier


Item # CHC1619

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Loosen screws **(H)** on either side of the cable lock nut **(I)** and install to end of hanging wire. Adjust to desired length, then insert other end of hanging wires through the cable lock **(I)**. Once complete re-secure screws **(H)** and cable nuts **(K)**. Repeat steps with the remaining wires (see diagram 2).
11. After fixture height is achieved shorten the wires by using a pair of cutters (not included), leaving enough length to connect to the driver.
NOTE: Final leveling in later step will only allow for small adjustments. Make sure fixture height and fixture level are accurate before cutting wires.
12. Remove outer housing of wire by making a neat cut all the way around, about 1" from the end. Once cut is made, remove and discard the 1" piece of housing, exposing the electrical wires.
NOTE: Make sure not to cut too deep into housing or electrical wires could become damaged.
13. Separate wires, and strip insulation on each 5/8".
14. Install metal plate **(F)** to mounting plate **(B)** and secure with collar ring **(G)**.
15. Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure (see diagram 2).

ASSEMBLY INSTRUCTIONS

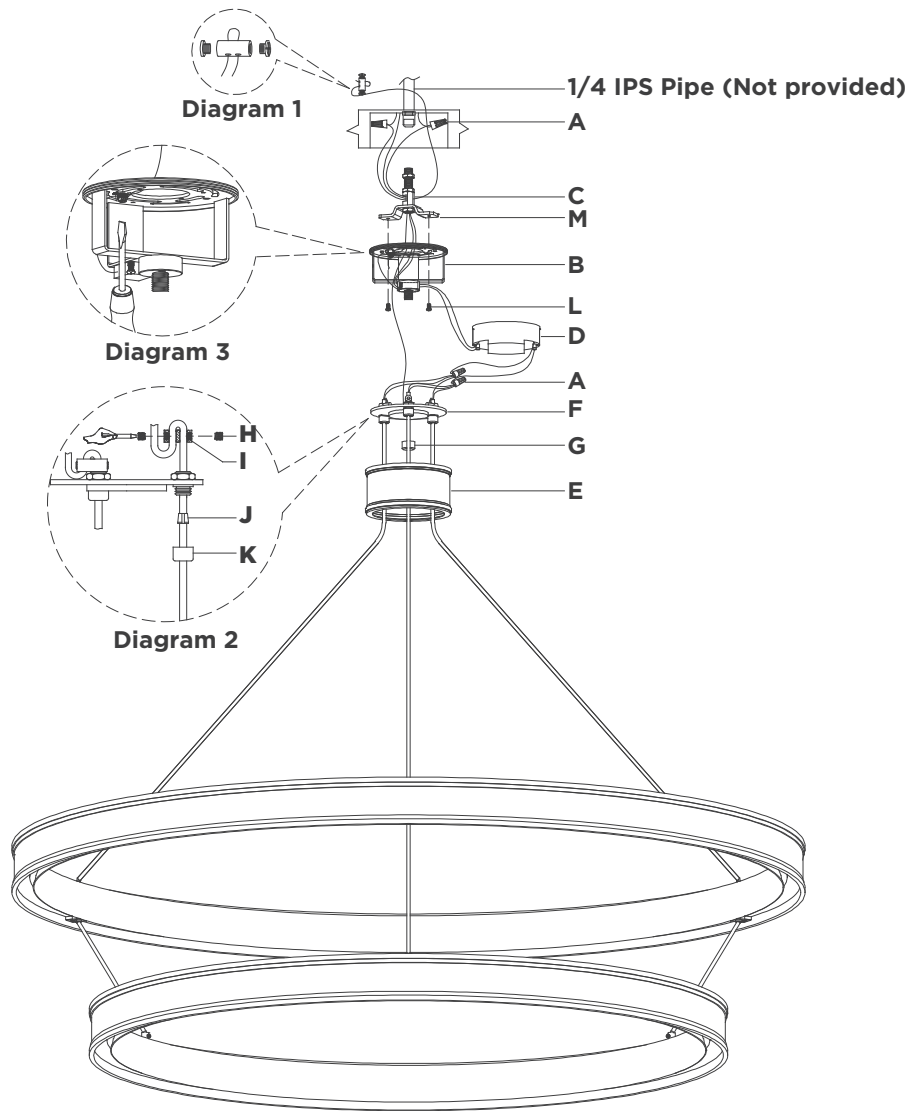

Connery 50" Two-Tier Ring Chandelier

Item # CHC1619

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

16. Connect fixture neutral wire (black) to driver **(D)** output wire (black) using wire nut **(A)**.
17. Connect fixture hot wire (red) to driver **(D)** output wire (red) using wire nut **(A)**.
CAUTION: Do not reverse the hot and neutral connections.
18. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 3). Tighten.
NOTE: It is imperative that the fixture is grounded.
19. Connect driver **(D)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
20. Connect driver **(D)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
CAUTION: Do not reverse the hot and neutral connections.
21. Make sure all wire connections are tight, then carefully tuck into the junction box.
22. Insert driver **(D)** into mounting plate **(B)** bracket.
23. Thread canopy **(E)** to mounting plate **(B)**.
24. To level fixture, unscrew cap nut **(K)**, feed fixture wire through stopper **(J)** and then re-secure cap nut **(K)**. Repeat as needed with other wires (see diagram 1).

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.