


ASSEMBLY INSTRUCTIONS

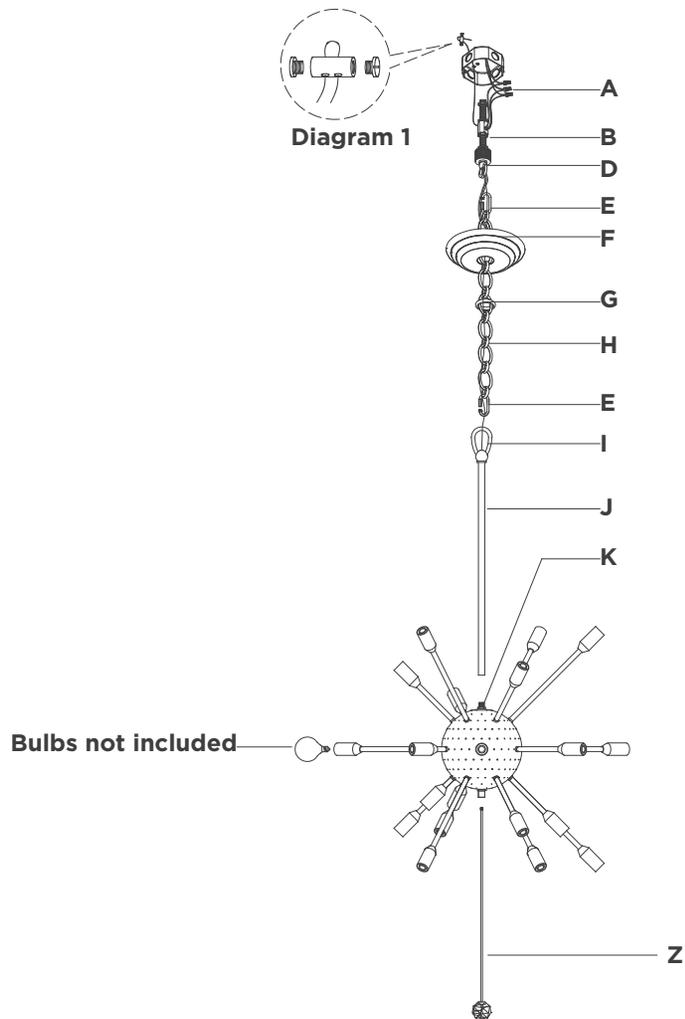

Lys 41" Chandelier

Item # SK5732

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

| | | |
|----------------------|---------------------|----------------|
| Phillips Screwdriver | Slotted Screwdriver | Wire Strippers |
| Slip Joint Pliers | Measuring Tape | Chain Pliers |
| Wire Cutters | | |

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove collar loop (D) from chain (H) by unscrewing quick link (E).
3. It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building (not included). Then install hex nut and threaded nipple (B) into receiver and tighten with the wrench.
NOTE: Item must be supported independent of the junction box due to weight.
4. Remove collar loop (D) from chain (H) and secure to threaded receiver attached to structural member by tightening locknut.
5. Install canopy (F) to collar loop (D) and secure with collar ring (G).
6. Determine desired overall length, and amount of chain (H) needed. Shorten chain using chain pliers. (Keep extra chain)
7. Thread rod (J) to fixture body (K).
8. Attach chain (H) to collar loop (D) and to fixture loop (I) using quick links (E). Secure quick links (E).

ASSEMBLY INSTRUCTIONS

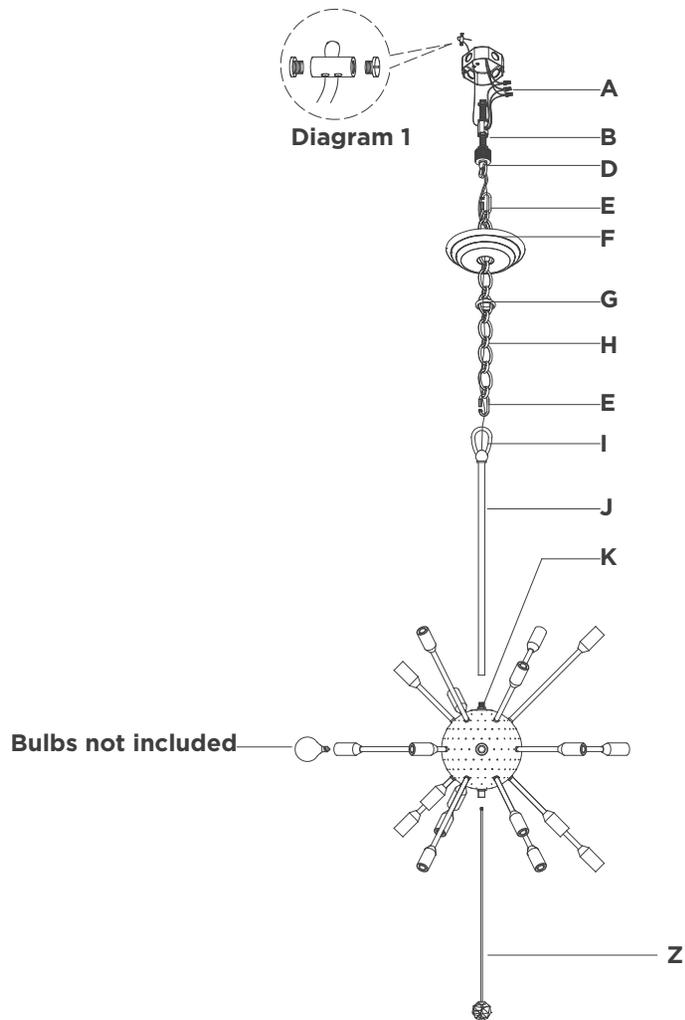

Lys 41" Chandelier



Item # SK5732

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

9. Thread fixture wire and ground wire through chain (**H**).
NOTE: When you reach the collar loop (**D**), ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box.
10. Separate two sides of molded wire, and strip insulation on each 5/8".
11. Loosen collar ring (**G**) and let canopy (**F**) slip down chain (**H**) carefully.
12. Twist all fixture wires together, and slip through center hole of collar loop (**D**).
NOTE: Untwist wires and separate to prepare for connection.
13. Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure (see diagram 1).
14. Connect fixture ground wire (bare copper) to the supply ground wire (usually green or bare copper) using wire nut (**A**).
NOTE: It is imperative that the fixture is grounded.
15. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (**A**).

ASSEMBLY INSTRUCTIONS

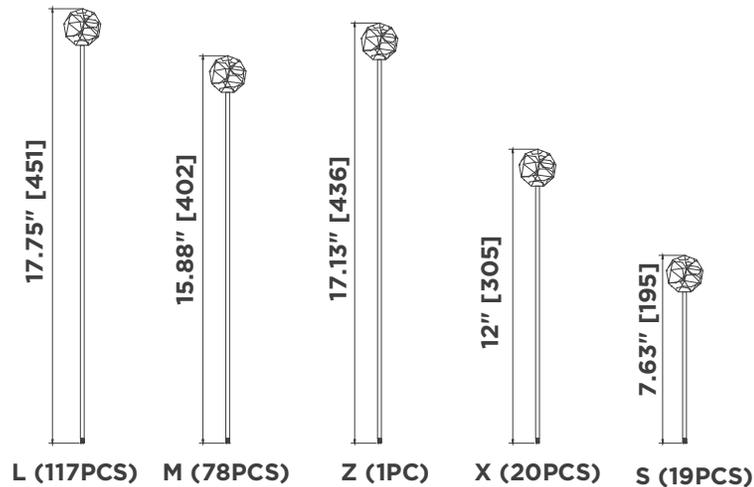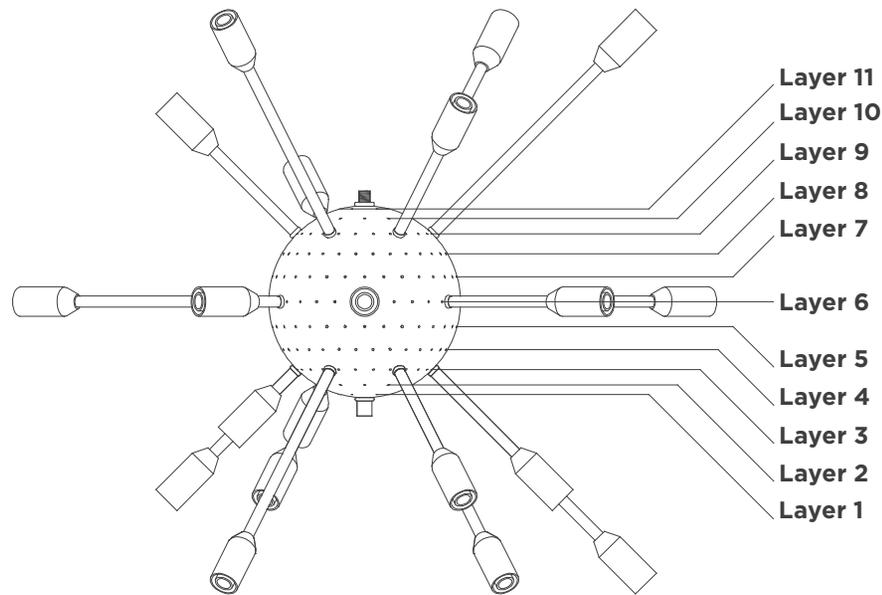

Lys 41" Chandelier

Item # SK5732

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

16. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(A)**.
CAUTION: Do not reverse the hot and neutral connections.
17. Make sure all wire connections are tight, then carefully tuck into the junction box.
18. Install canopy **(F)** to collar loop **(D)** and secure with collar ring **(G)**.
19. Install light bulbs into the sockets.
20. Thread rod **(Z)** to bottom of fixture.
21. Install rods starting from the middle layer (layer 6) as shown in below diagram.

Metal Rod & Glass Assembly:

(Reference layer diagrams for steps 1-6 below)

1. Thread rods **(L & M & S & X)** to layer 6 as shown in layer 6 diagram.
NOTE: Reference orientation of socket on layer 6 to find starting point for rods.
2. Thread rods **(L & M & S & X)** to layer 5 & 7 as in layer 5 & 7 diagram.
NOTE: Reference orientation of socket on layer 6 to find starting point for rods.
3. Thread rods **(L & M & S & X)** to layer 4 & 8 as shown in layer 4 & 8 diagram.
NOTE: Reference orientation of socket on layer 6 to find starting point for rods.

ASSEMBLY INSTRUCTIONS


Lys 41" Chandelier

Item # SK5732


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

Layer 6

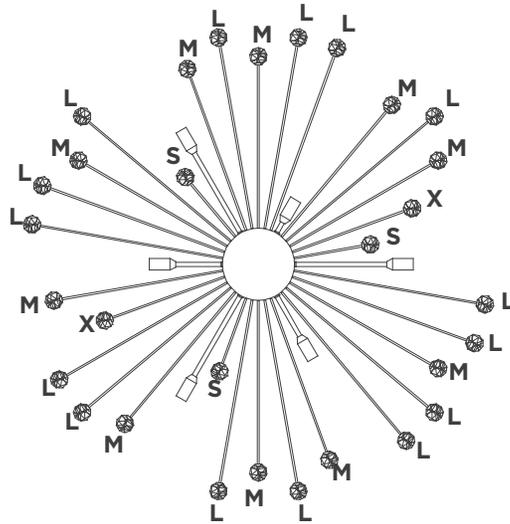

Layer 5 & 7

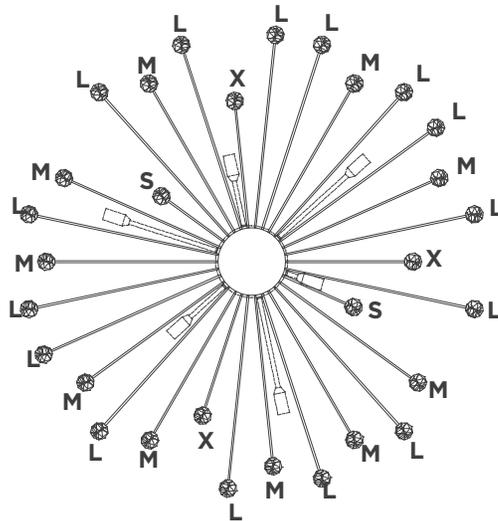

1. Thread rods **(L & M & S & X)** to layer 3 & 9 as shown in layer 3 & 9 diagram.

NOTE: Reference orientation of socket on layer 3 & 9 to find starting point for rods.

2. Thread rods **(L & M & S & X)** to layer 2 & 10 as shown in layer 2 & 10 diagram.

NOTE: Reference orientation of socket on layer 3 & 9 to find starting point for rods.

3. Thread rods **(L & M & X)** to layer 1 & 11 as shown in layer 1 & 11 diagram.

NOTE: Reference orientation of socket on layer 3 & 9 to find starting point for rods.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

ASSEMBLY INSTRUCTIONS


Lys 41" Chandelier

Item # SK5732


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

Layer 4 & 8

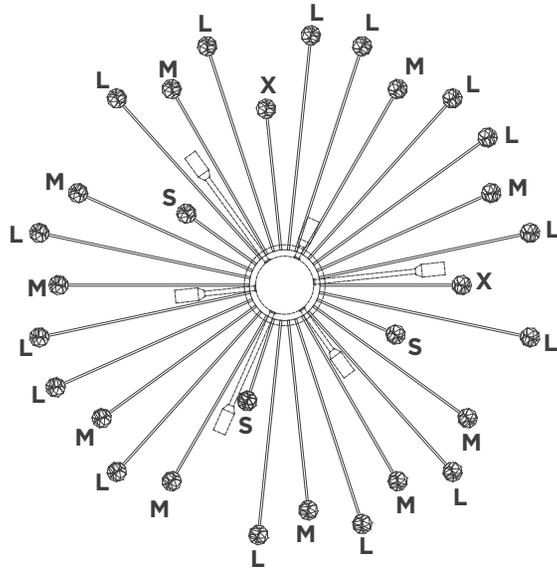

Layer 3 & 9

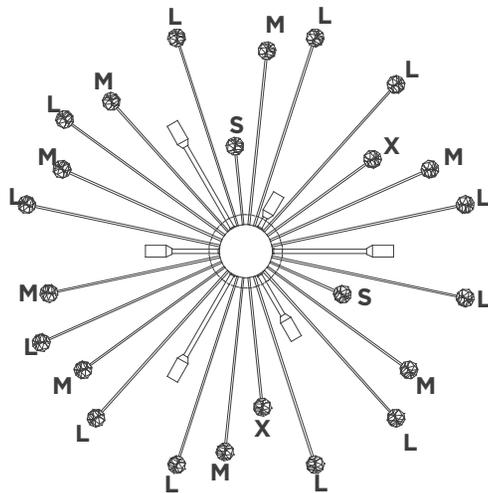

ASSEMBLY INSTRUCTIONS


Lys 41" Chandelier

Item # SK5732

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

Layer 2 & 10

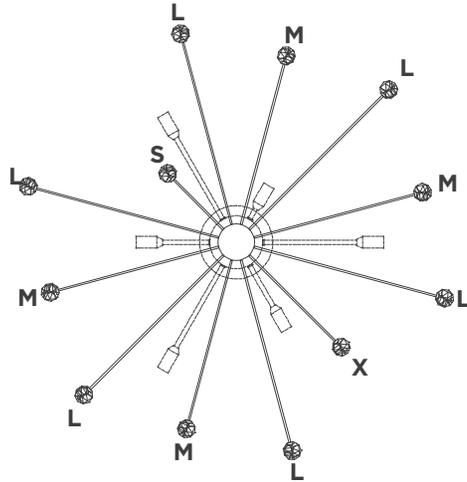

Layer 1 & 11

