

HUDSON VALLEY LIGHTING GROUP

Hudson Valley Lighting | Troy Lighting | Mitzi | Corbett Lighting



WARNING/CAUTION

- DISCONNECT POWER BEFORE RE-LAMPING OR WIRING THE FIXTURE. READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.
- TO AVOID THE RISK OF FIRE OR SHOCK, FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL/BUILDING CODES. THE INSTALLATION AND MAINTENANCE OF THIS UNIT SHOULD BE COMPLETED BY A LICENSED ELECTRICIAN OR CERTIFIED FACTORY TRAINED TECHNICIAN.
- CALIFORNIA PROP 65: THIS LIGHTING FIXTURE CONTAINS CHEMICALS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, AND/OR OTHER REPRODUCTIVE HARM. WASH HANDS AFTER USE.
- UNPACK FIXTURE, PARTS AND PARTS BAG(S) BEFORE DISCARDING THE CARTON. MAKE CERTAIN THAT ALL PARTS ARE FOUND. INSPECT THE FIXTURE PRIOR TO INSTALLATION FOR ANY DAMAGE. HVLG DOES NOT PAY OR REIMBURSE ELECTRICIAN FEES. FIXTURE MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED. SEE WARRANTY FOR EXCEPTIONS.
- PLEASE CLEAN WITH A SOFT, DRY CLOTH ONLY! DO NOT USE CLEANSERS.



ATTENTION PRUDENCE

- DÉBRANCHEZ L'ALIMENTATION AVANT DE REMPLIR OU DE CÂBLER LE LUMINAIRE. LISEZ COMPLÈTEMENT TOUTES LES INSTRUCTIONS AVANT DE COMMENCER L'INSTALLATION
- POUR ÉVITER LE RISQUE D'INCENDIE OU D'ÉLECTROCUTION, LE LUMINAIRE DOIT ÊTRE INSTALLÉ CONFORMÉMENT À TOUS LES CODES ÉLECTRIQUES/DE CONSTRUCTION NATIONAUX ET LOCAUX APPLICABLES. L'INSTALLATION ET L'ENTRETIEN DE CET APPAREIL DOIVENT ÊTRE EFFECTUÉS PAR UN ÉLECTRICIEN AGRÉÉ OU UN TECHNICIEN CERTIFIÉ FORMÉ EN USINE.
- CALIFORNIE PROP 65 : CET APPAREIL D'ÉCLAIRAGE CONTIENT DES PRODUITS CHIMIQUES CONNUS PAR L'ÉTAT DE CALIFORNIE POUR PROVOQUER LE CANCER, DES MALADIES CONGÉNITALES ET/OU D'AUTRES DOMMAGES À LA REPRODUCTION. LAYER LES MAINS APRÈS UTILISATION.
- DÉBALLEZ LE LUMINAIRE, LES PIÈCES ET LE(S) SAC(S) DE PIÈCES. AVANT DE JETER LE CARTON. ASSUREZ-VOUS QUE TOUTES LES PIÈCES SONT TROUVÉES. INSPECTEZ LE LUMINAIRE AVANT DE L'INSTALLER POUR DÉTECTER TOUT DOMMAGE. HVLG NE PAIE NI NE REMBOURSE LES FRAIS D'ÉLECTRICITÉ. LE LUMINAIRE NE PEUT PAS ÊTRE RETOURNÉ UNE FOIS QU'IL A ÉTÉ INSTALLÉ. VOIR GARANTIE POUR LES EXCEPTIONS.
- VEUILLEZ NETTOYER UNIQUEMENT AVEC UN CHIFFON DOUX ET SEC ! N'UTILISEZ PAS DE NETTOYANTS.




PRECAUCIÓN ADVERTENCIA

- DESCONECTE LA CORRIENTE ANTES DE VOLVER A ENCENDER O CONECTAR EL APARATO. LEA TODAS LAS INSTRUCCIONES ANTES DE COMENZAR LA INSTALACIÓN.
- PARA EVITAR EL RIESGO DE INCENDIO O DESCARGA ELÉCTRICA, LA INSTALACIÓN DEBE SER REALIZADA DE CONFORMIDAD CON TODOS LOS CÓDIGOS DE CONSTRUCCIÓN / ELÉCTRICOS NACIONALES Y LOCALES APPLICABLES. LA INSTALACIÓN Y EL MANTENIMIENTO DE ESTA UNIDAD DEBE SER REALIZADO POR UN ELECTRICISTA LICENCIADO O UN TÉCNICO CAPACITADO POR UNA EN FÁBRICA CERTIFICADORA.
- CALIFORNIA PROP 65: ESTE APARATO DE ILUMINACIÓN CONTIENE PRODUCTOS QUÍMICOS QUE EL ESTADO DE CALIFORNIA SE CONOCE POR CAUSAR CÁNCER, DEFECTOS DE NACIMIENTO Y / U OTROS DAÑOS REPRODUCTIVOS. LAVARSE LAS MANOS DESPUÉS DEL USO.
- DESEMBALA LOS ACCESORIOS, REPUESTOS Y BOLSA (S) DE REPUESTOS. ANTES DE DESECHAR LA CAJA. ASEGÚRESE DE ENCONTRAR TODAS LAS PIEZAS. INSPECCIONE EL ACCESORIO ANTES DE LA INSTALACIÓN POR CUALQUIER DAÑO. HVLG NO PAGA NI REEMBOLSA LAS TARIFAS DEL ELECTRICISTA. EL ACCESORIO NO SE PUEDE DEVOLVER UNA VEZ QUE SE HAYA INSTALADO. CONSULTE LA GARANTÍA PARA EXCEPCIONES.
- ¡LIMPIE CON UN PAÑO SECO Y SUAVE ÚNICAMENTE! NO USE LIMPIADORES.

CORBETT

ISTANBUL 571-40 Installation Instructions

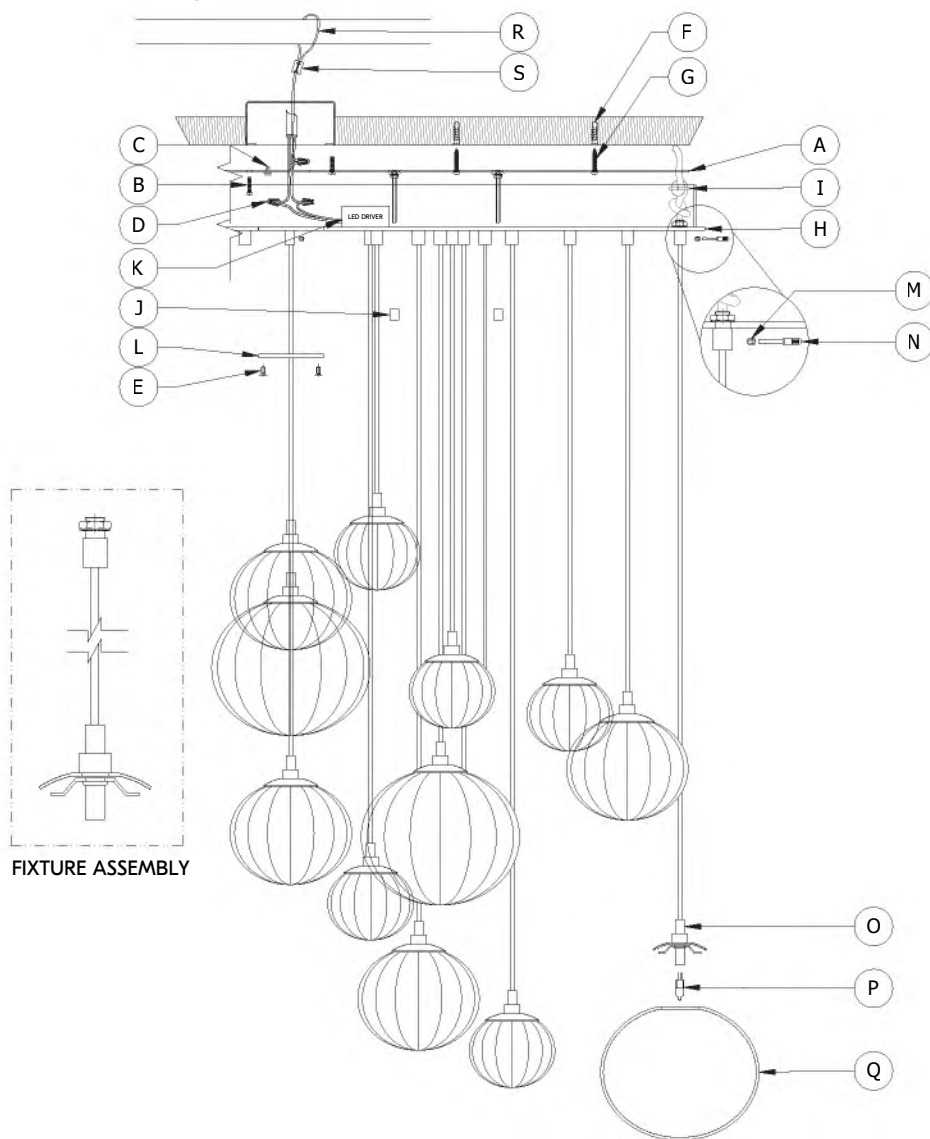


FIXTURE ASSEMBLY

PART(S)	REPLACEMENT PART NAME	NUMBER
A,B,C,D,F,G,S	HARDWARE KIT	HDW-571-29
E	FIXTURE MOUNTING SCREW	SCR-M
J	BARREL NUT	CAP-10MM
K	LED DRIVER	LED-571-40
L	CAP	CAP-571-29
O	FIXTURE ASSEMBLY	FAS-571-29




FIXTURE INSTALLATION

- Once your desired height is met (SEE GLASS ASSEMBLIES FOR YOUR HEIGHT PREFERENCE). Insert each cord of the FIXTURE ASSEMBLY (O) onto the CANOPY (H). Tie an overhand knot then secure using STRAIN RELIEF (I), and NYLON SCREW (M) tighten it using SLOTTED SCREWDRIVER (N).
- Divide the cords into 6 equal groups, verify that each group contains 5 cords. Connect a black wire extension to the black fixture leads and white wire extension to white fixture leads, secure them using WIRE NUT (D). (SEE THE WIRE DIAGRAM FOR YOUR REFERENCE).
- Connect the 3 cord groups black wire extensions to the hot (GENERALLY RED) wire in the first LED DRIVER (K), then connect the other 3 cord groups black wire extensions to the hot (GENERALLY RED) wire in the second LED DRIVER (K). Fasten the joined wires using an approved fastener (WIRE NUT) (D). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
- Connect the 3 cord groups white wire extensions to the neutral (GENERALLY BLACK) wire in the first LED DRIVER (K), then connect the other 3 cord groups white wire extensions to the neutral (GENERALLY BLACK) wire in the second LED DRIVER (K). Fasten the joined wires same as previous step. NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
- Mark the hole for WALL ANCHORS (F) using the MOUNTING PLATE (A), drill the marked hole then embed WALL ANCHORS (F) onto the hole.
- Pull wire out from the junction box, attach the MOUNTING PLATE (A) onto the junction box using the MOUNTING SCREWS (B) & WOOD SCREW (G). This fixture is designed to be mounted on standard round or octagon junction box. The junction box must be securely mounted to the structure of the building.
- Attach the SAFETY CABLE (R) to the building structure or brace using CABLE CLIP (S).
- Unscrew the CAP (L) of the CANOPY (H) and pull the wires out from the CANOPY (H). Attach the CANOPY (H) onto the MOUNTING PLATE (A), secure using BARREL NUTS (I).
- Attach the Ground wire (Green) to the ground inside the junction box (Generally green or bar copper wire) or the GROUND SCREW (C) on the MOUNTING PLATE (A). NEVER CONNECT GROUND WIRE TO "HOT" WIRE FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
- Connect the white wires from the LED DRIVERS (K) lead to the neutral (Generally white) white wire in the junction box. Fasten the wires together with an approved fastener (WIRE NUT) (D). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!
- Connect the black wires from the LED DRIVERS (K) lead to the hot (Generally black) wire in the junction box. Fasten the joined wires same as previous step. NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
- Push the wires back onto the junction box, attach the CAP (L) onto the CANOPY (H) secure using the FIXTURE MOUNTING SCREW (E).
- Plug the BULB (P) onto the socket of the fixture. THIS FIXTURE IS RATED FOR 2 WATT LED TYPE G4 LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE.
- Attach the GLASS (Q) onto the FIXTURE ASSEMBLY (O) based on their corresponding code. (SEE GLASS HEIGHT SETTING FOR YOUR REFERENCE).
- Restore power to the outlet at the breaker or fuse box.

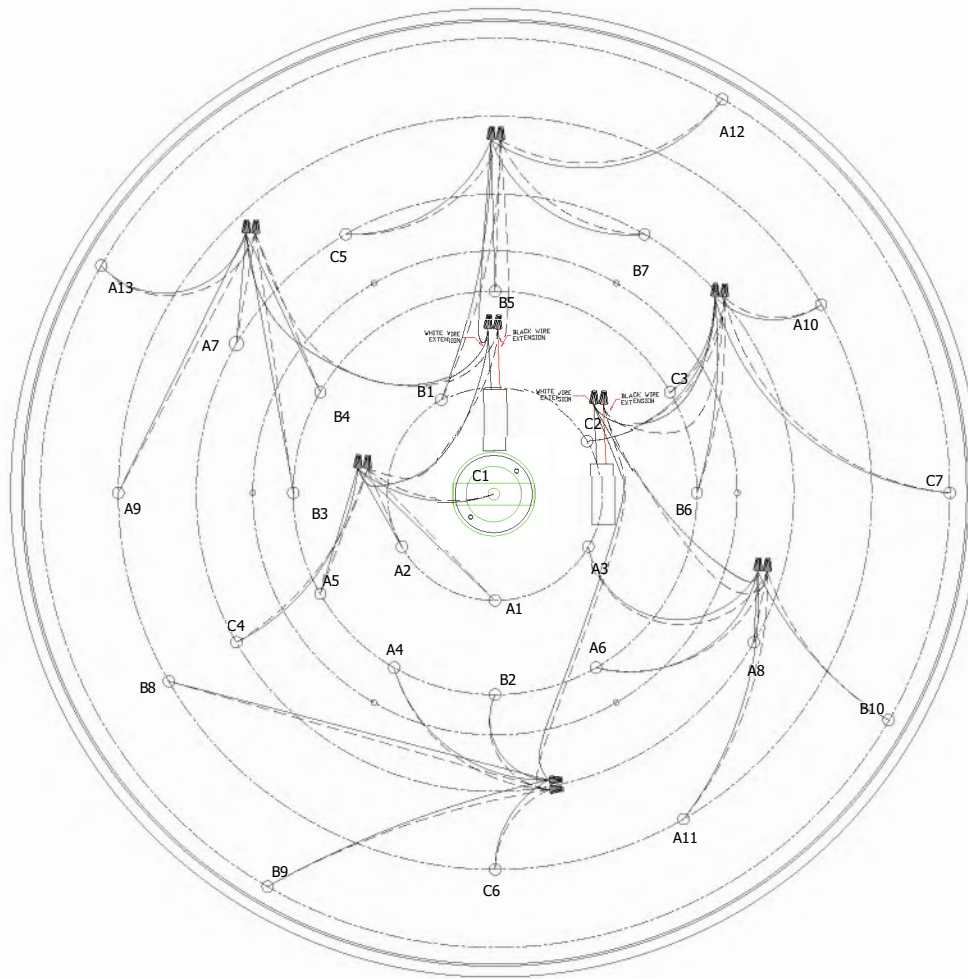
TOP VIEW OF THE CANOPY





KEY:

-  = WIRE CONNECTOR
-  = (-) WHITE LEAD
-  = (+) BLACK LEAD

LED DRIVER WIRING GUIDE


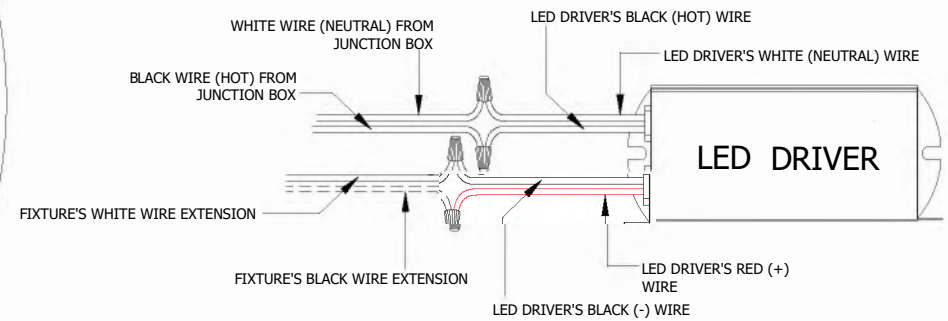


HEIGHT SETTING 1

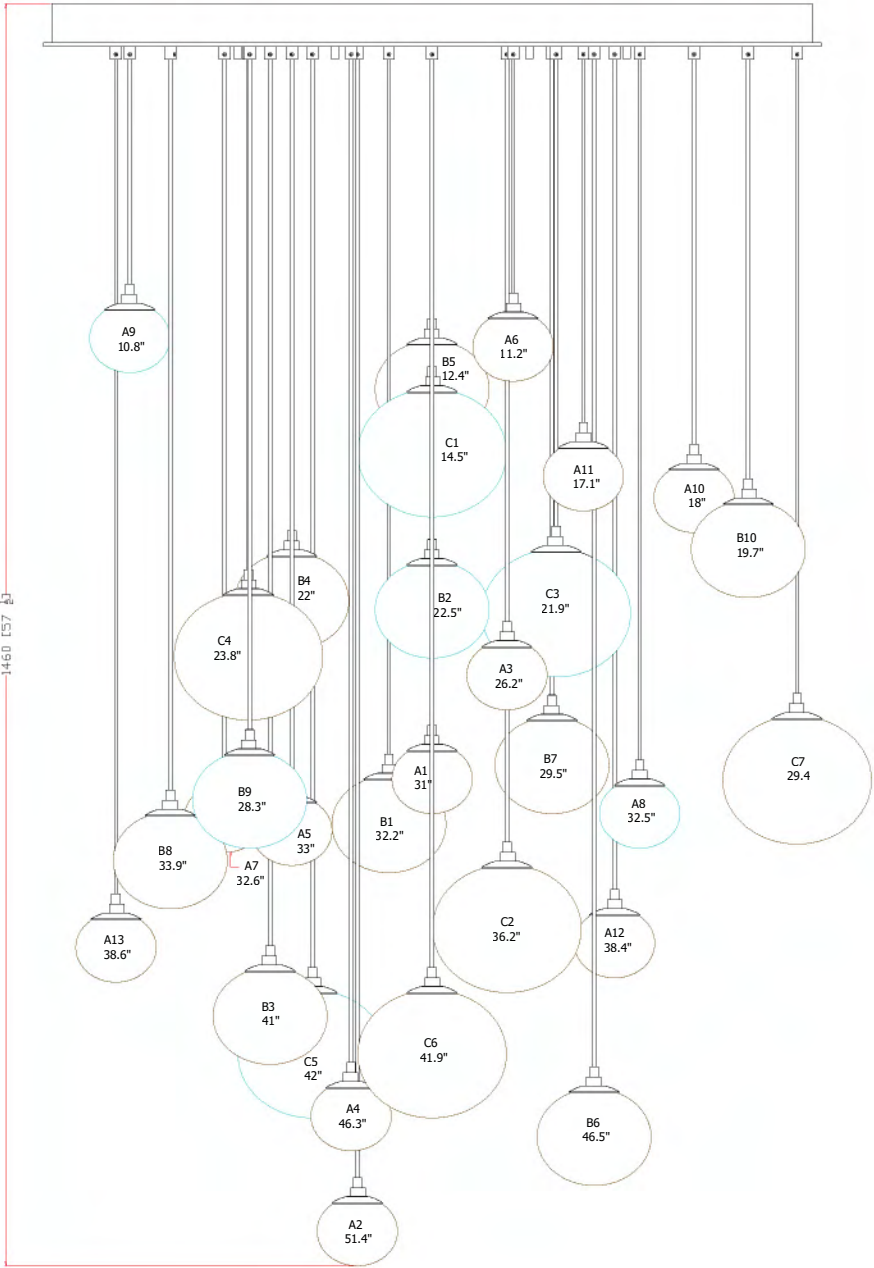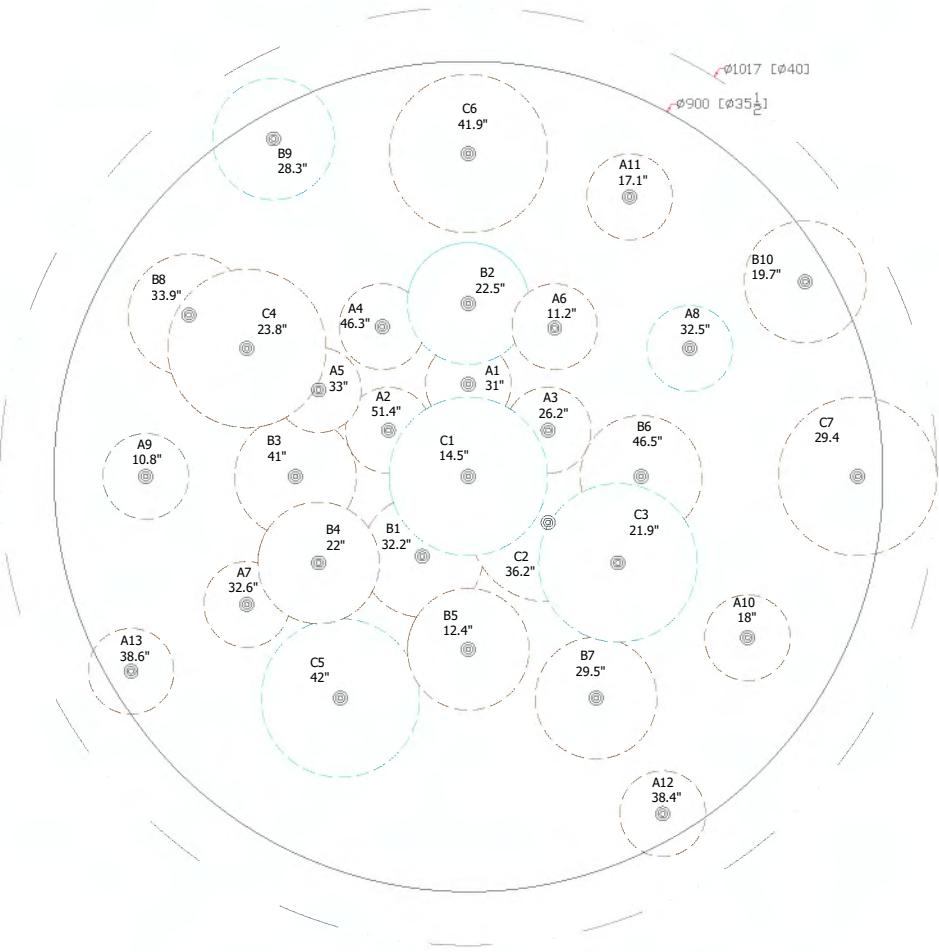



PART(S)	REPLACEMENT PART NAME	NUMBER
A	93mm BRONZE GLASS	GLS-571-29-A
B	93mm CLEAR GLASS	GLS-571-29-B
C	132mm BRONZE GLASS	GLS-571-29-C
D	132mm CLEAR GLASS	GLS-571-29-D
E	172mm BRONZE GLASS	GLS-571-29-E
F	172mm CLEAR GLASS	GLS-571-29-F

HEIGHT SETTING 2

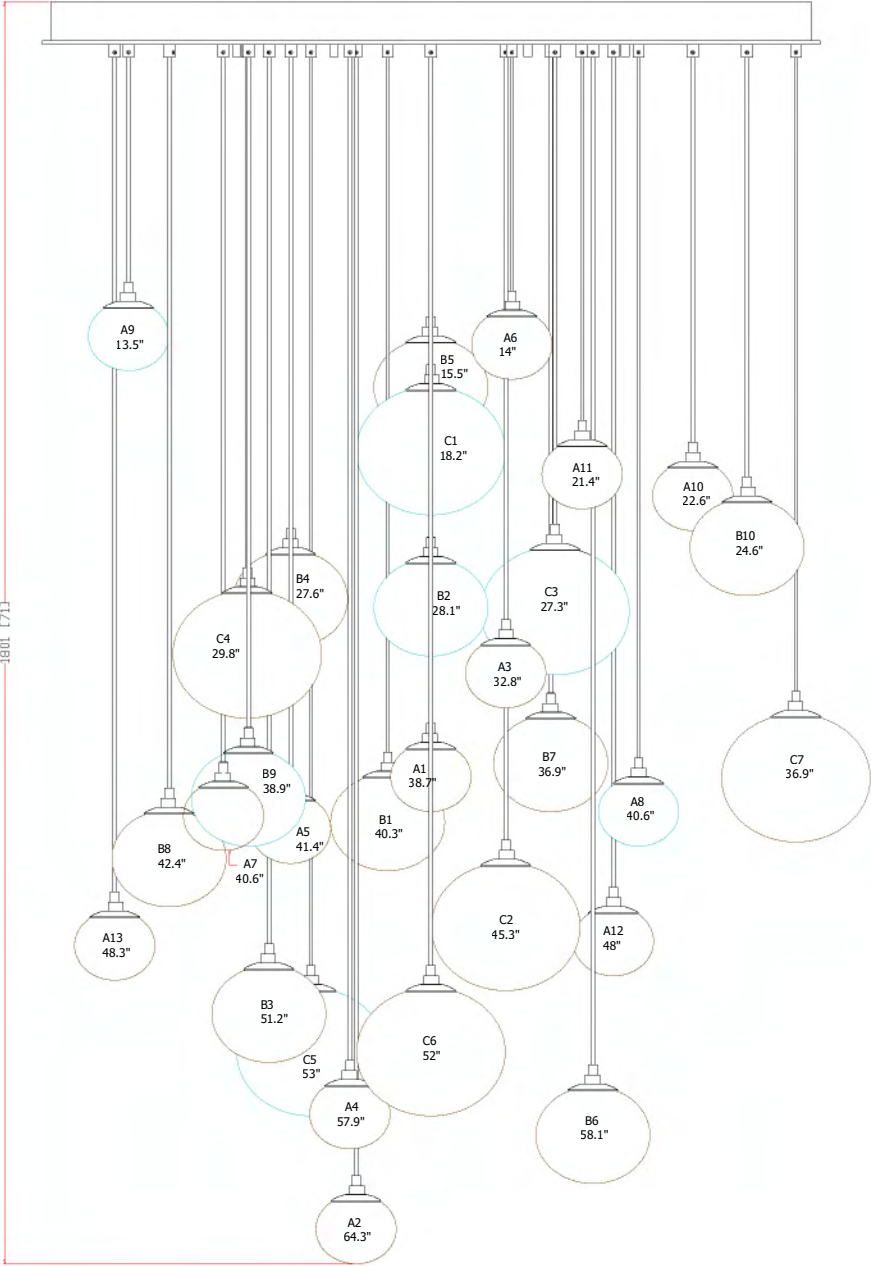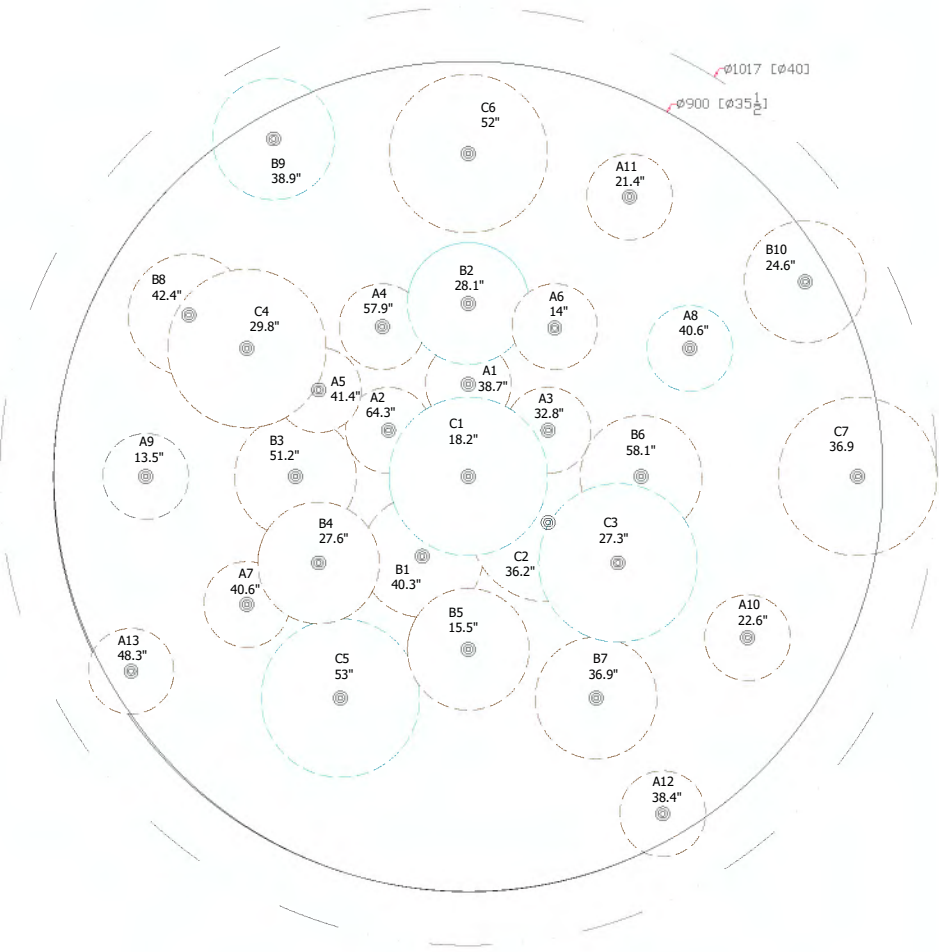

PART(S)	REPLACEMENT PART NAME	NUMBER
A	93mm BRONZE GLASS	GLS-571-29-A
B	93mm CLEAR GLASS	GLS-571-29-B
C	132mm BRONZE GLASS	GLS-571-29-C
D	132mm CLEAR GLASS	GLS-571-29-D
E	172mm BRONZE GLASS	GLS-571-29-E
F	172mm CLEAR GLASS	GLS-571-29-F

HEIGHT SETTING 3

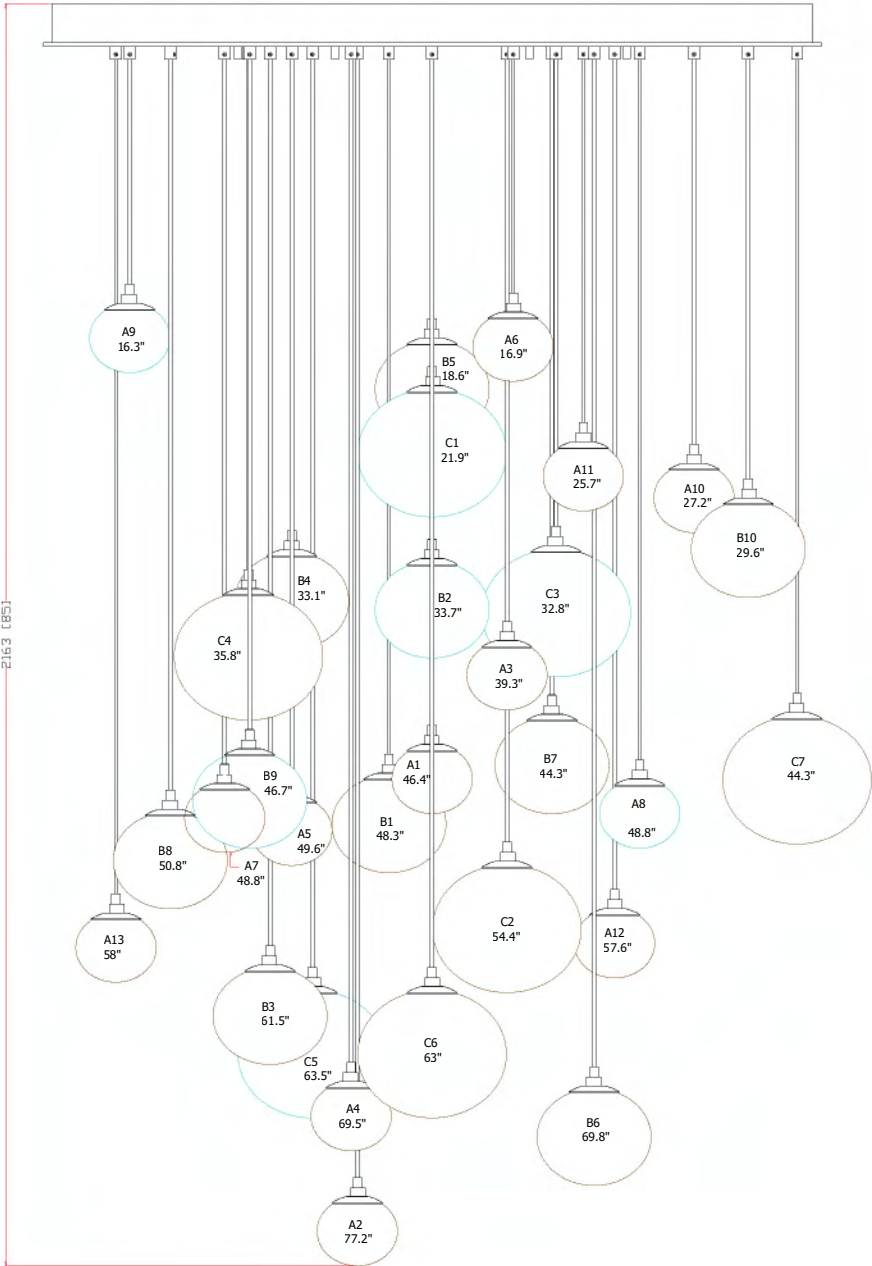
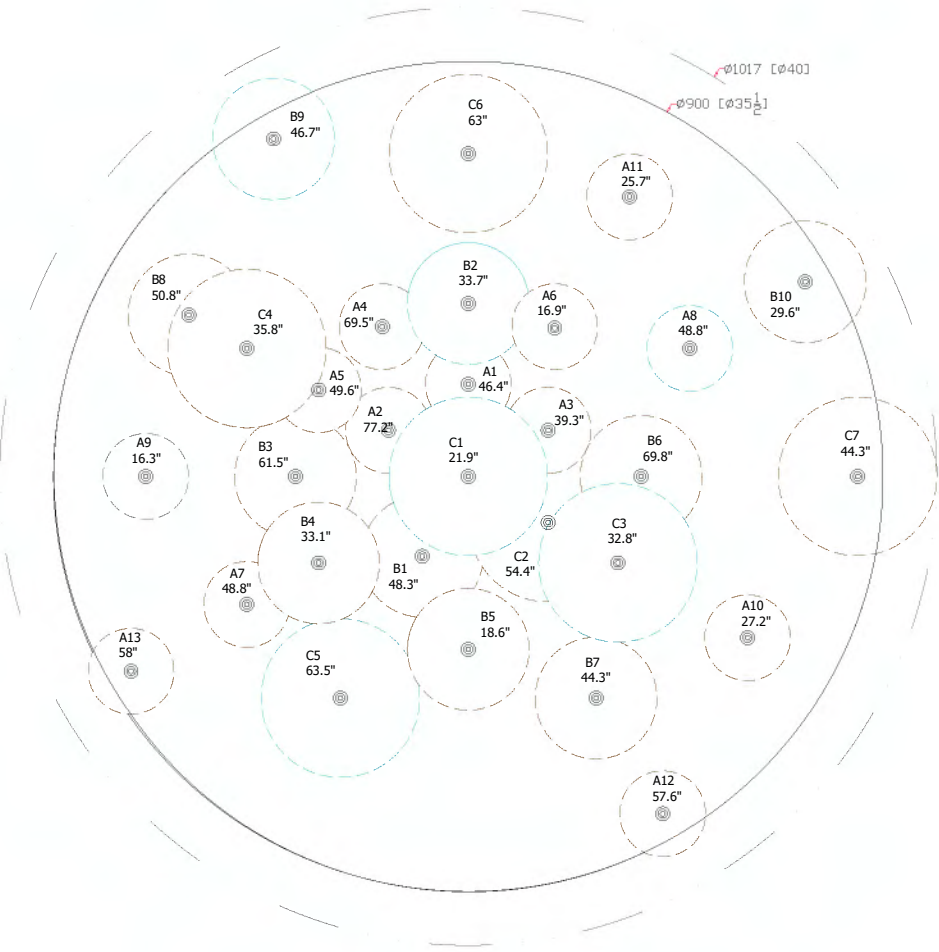


PART(S)	REPLACEMENT PART NAME	NUMBER
A	93mm BRONZE GLASS	GLS-571-29-A
B	93mm CLEAR GLASS	GLS-571-29-B
C	132mm BRONZE GLASS	GLS-571-29-C
D	132mm CLEAR GLASS	GLS-571-29-D
E	172mm BRONZE GLASS	GLS-571-29-E
F	172mm CLEAR GLASS	GLS-571-29-F

CORBETT



ISTANBUL
571-40
Glass Assembly

HEIGHT SETTING 4

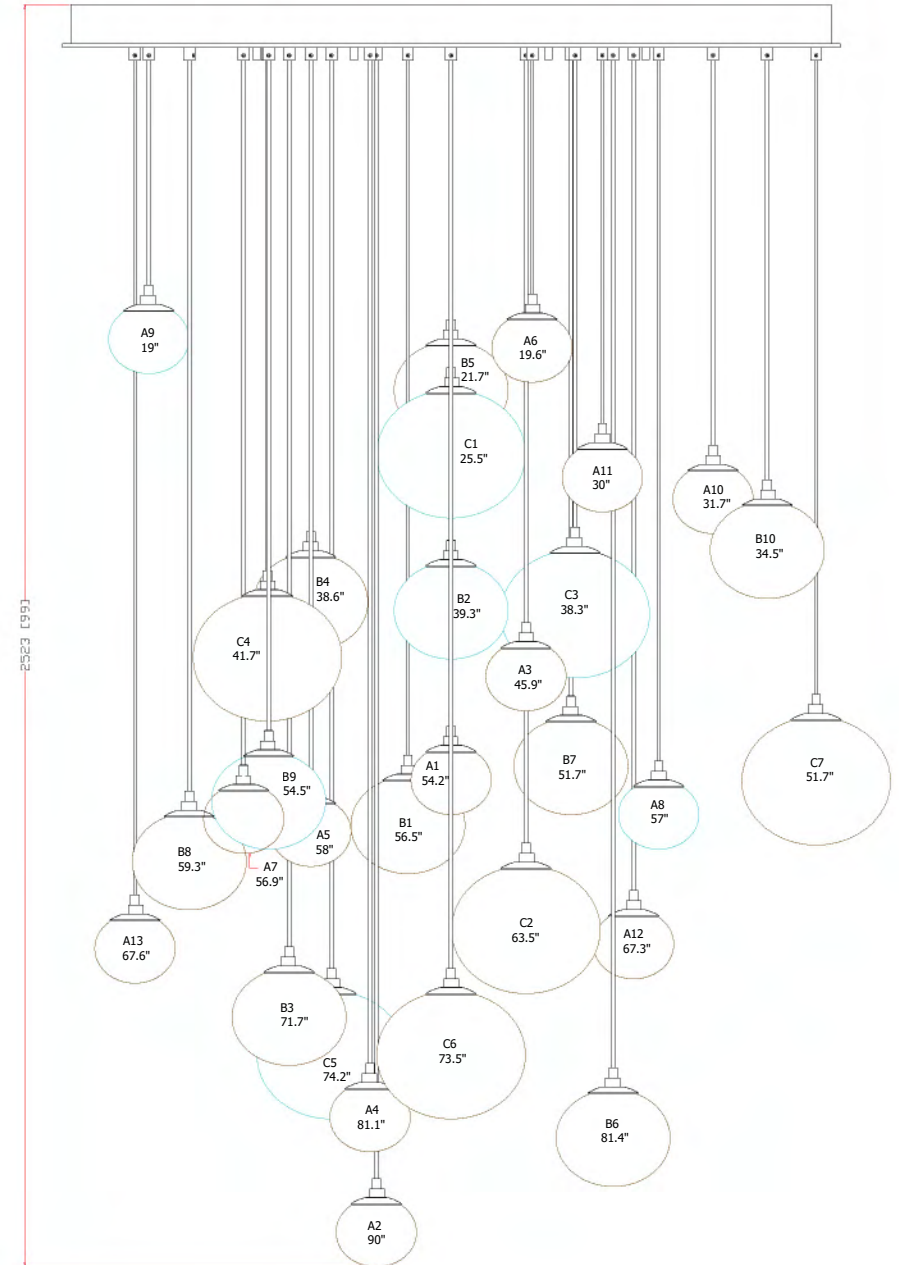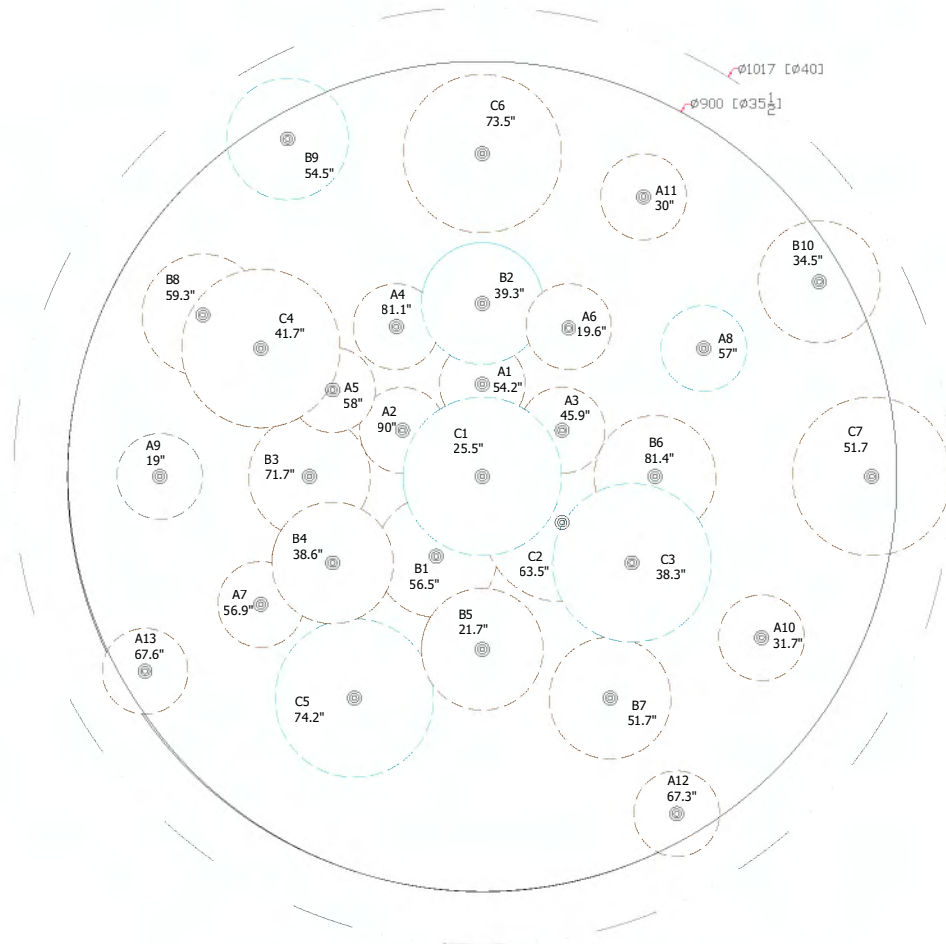

PART(S)	REPLACEMENT PART NAME	NUMBER
A	93mm BRONZE GLASS	GLS-571-29-A
B	93mm CLEAR GLASS	GLS-571-29-B
C	132mm BRONZE GLASS	GLS-571-29-C
D	132mm CLEAR GLASS	GLS-571-29-D
E	172mm BRONZE GLASS	GLS-571-29-E
F	172mm CLEAR GLASS	GLS-571-29-F

HEIGHT SETTING 5

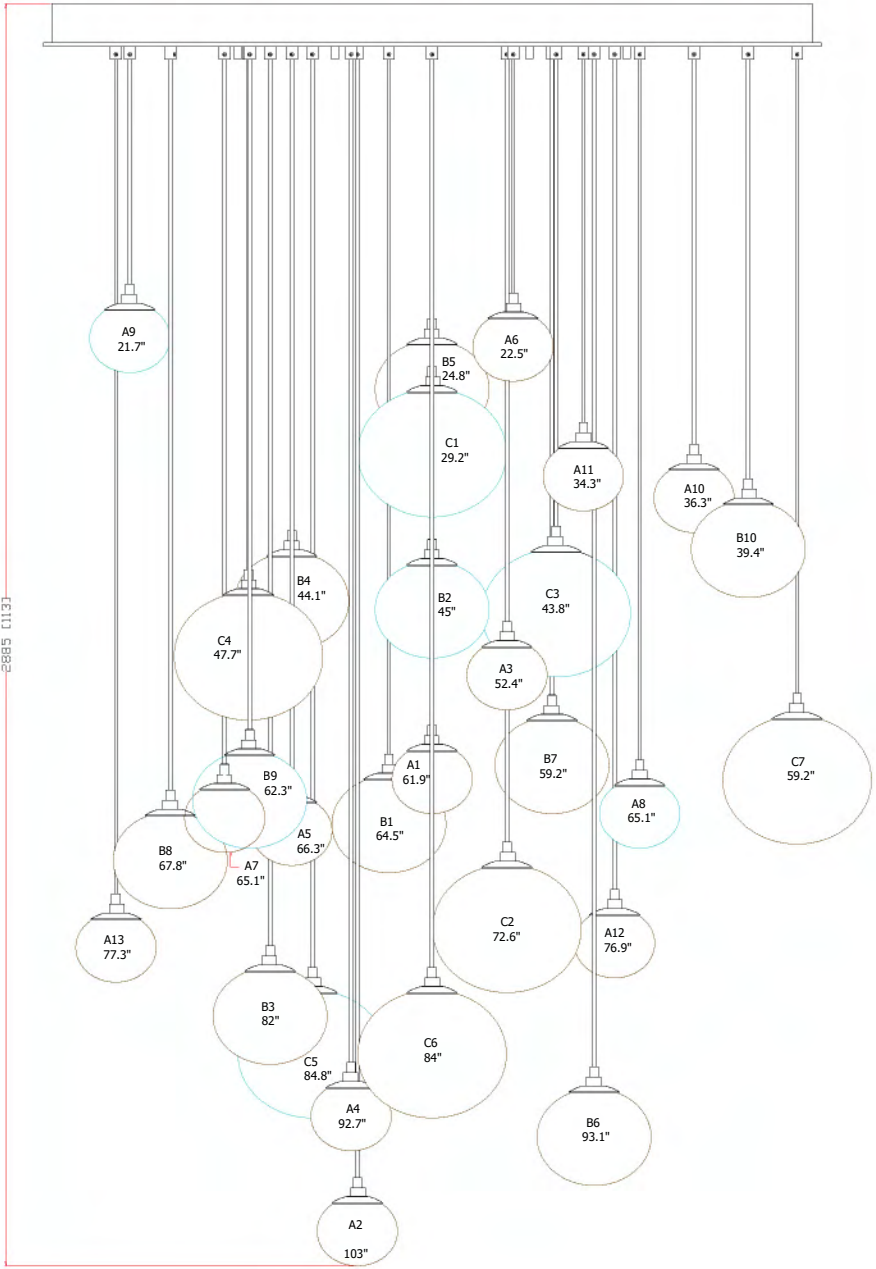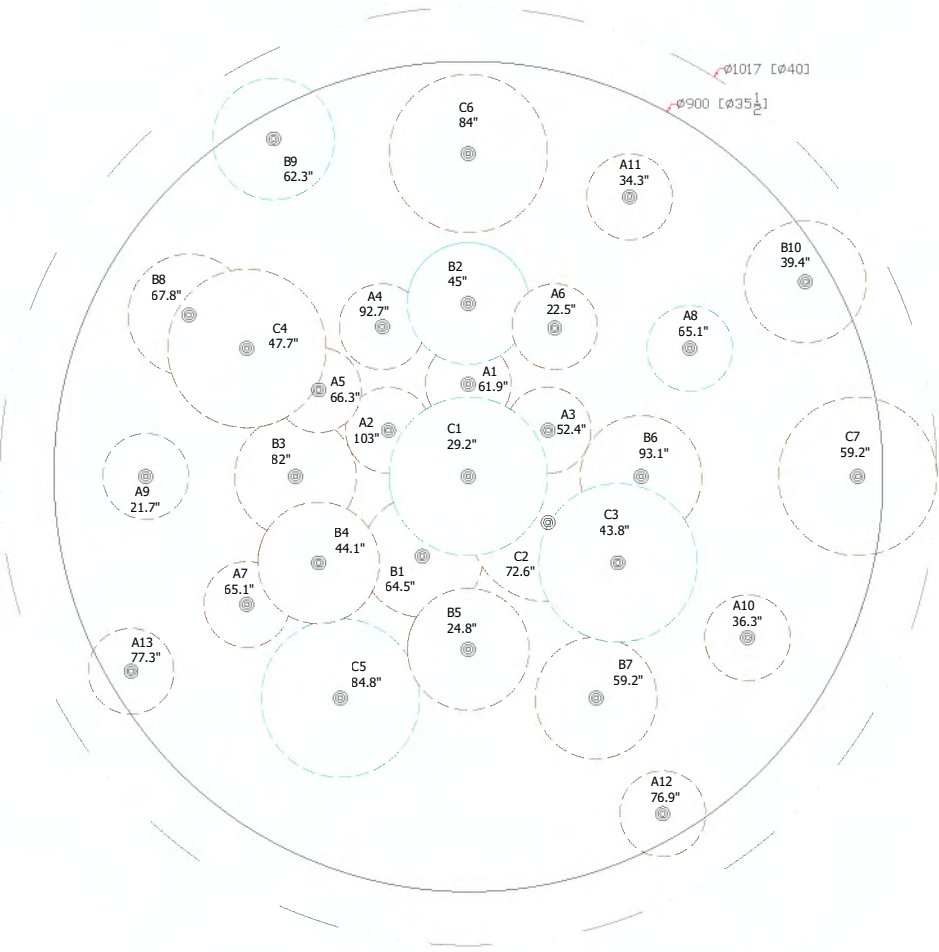


PART(S)	REPLACEMENT PART NAME	NUMBER
A	93mm BRONZE GLASS	GLS-571-29-A
B	93mm CLEAR GLASS	GLS-571-29-B
C	132mm BRONZE GLASS	GLS-571-29-C
D	132mm CLEAR GLASS	GLS-571-29-D
E	172mm BRONZE GLASS	GLS-571-29-E
F	172mm CLEAR GLASS	GLS-571-29-F


HEIGHT SETTING 6



PART(S)	REPLACEMENT PART NAME	NUMBER
A	93mm BRONZE GLASS	GLS-571-29-A
B	93mm CLEAR GLASS	GLS-571-29-B
C	132mm BRONZE GLASS	GLS-571-29-C
D	132mm CLEAR GLASS	GLS-571-29-D
E	172mm BRONZE GLASS	GLS-571-29-E
F	172mm CLEAR GLASS	GLS-571-29-F

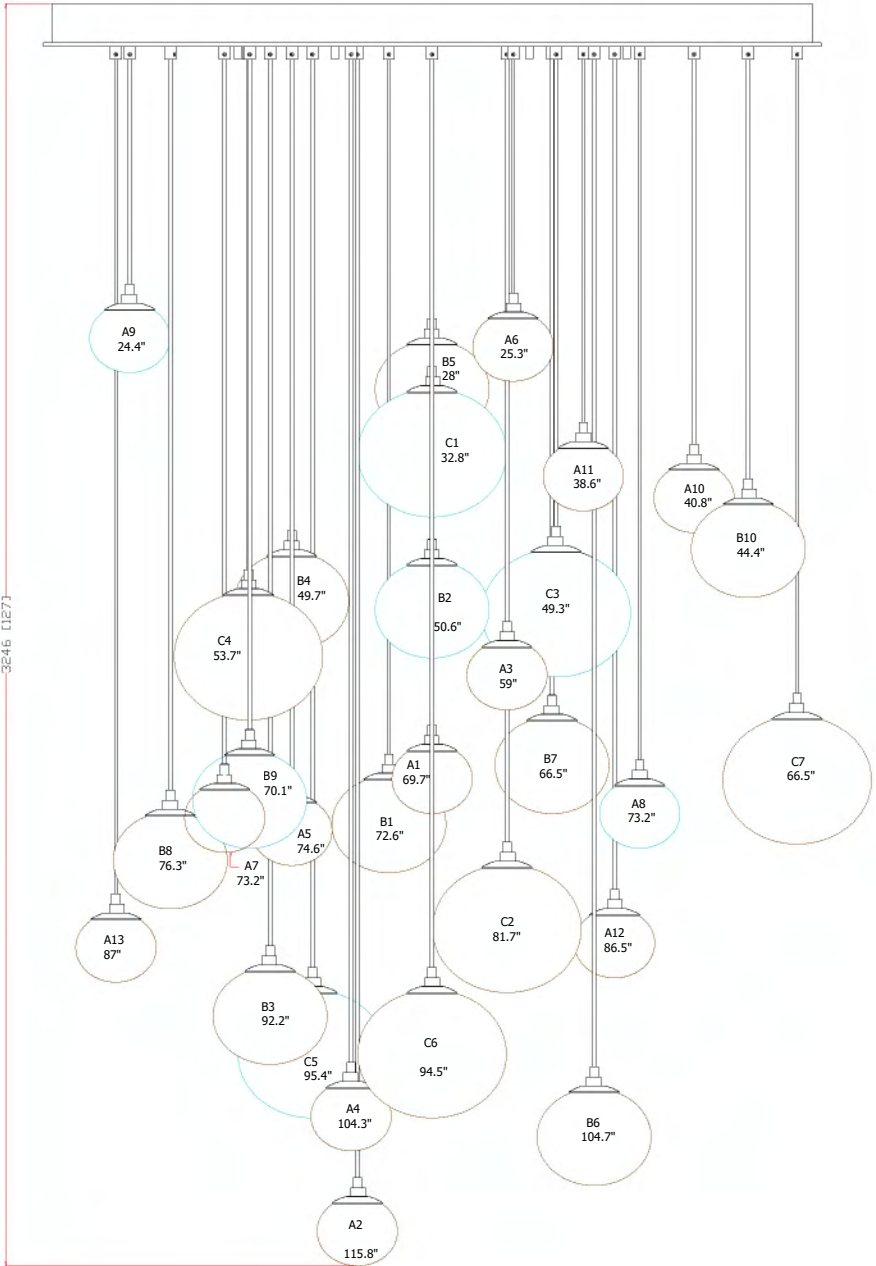


HEIGHT SETTING 7

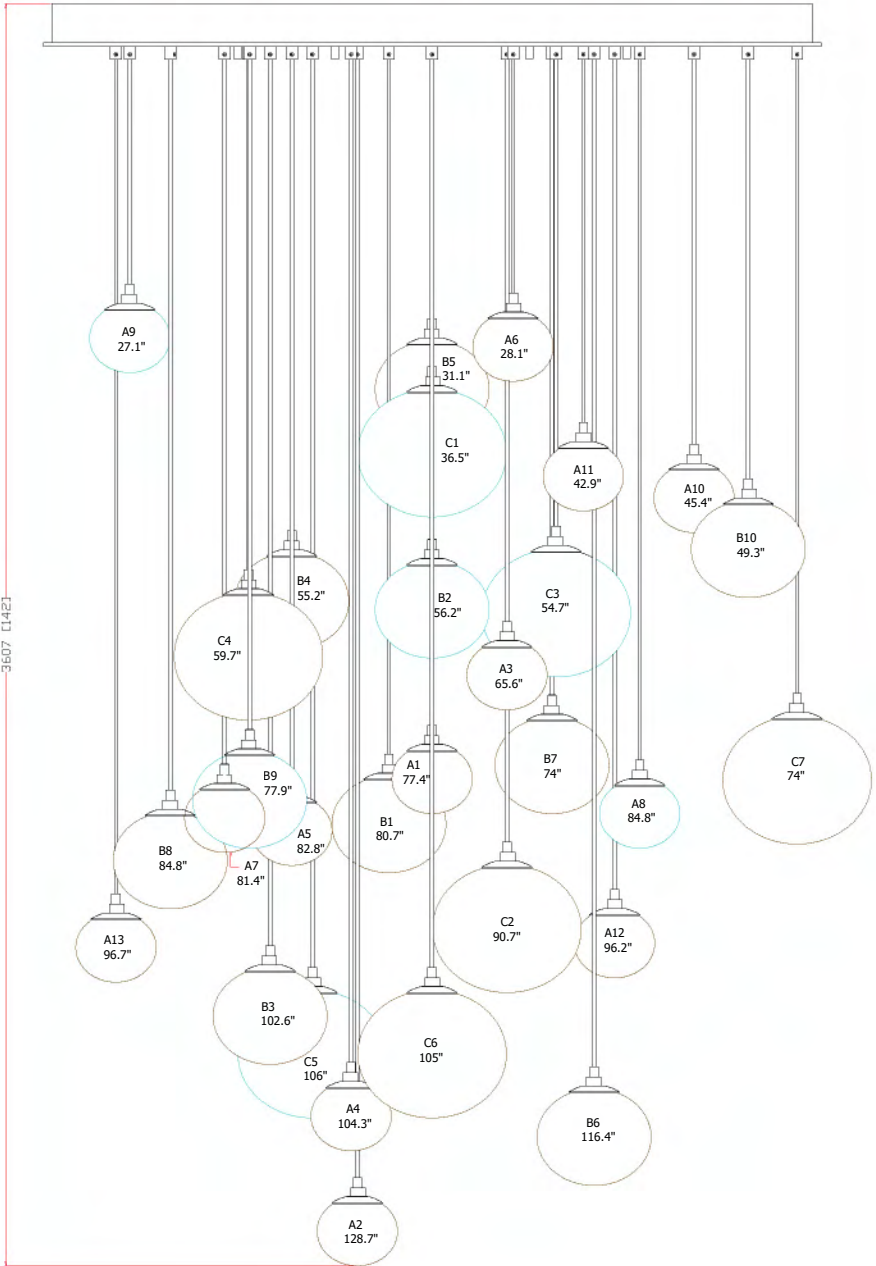

PART(S)	REPLACEMENT PART NAME	NUMBER
A	93mm BRONZE GLASS	GLS-571-29-A
B	93mm CLEAR GLASS	GLS-571-29-B
C	132mm BRONZE GLASS	GLS-571-29-C
D	132mm CLEAR GLASS	GLS-571-29-D
E	172mm BRONZE GLASS	GLS-571-29-E
F	172mm CLEAR GLASS	GLS-571-29-F

HEIGHT SETTING 8

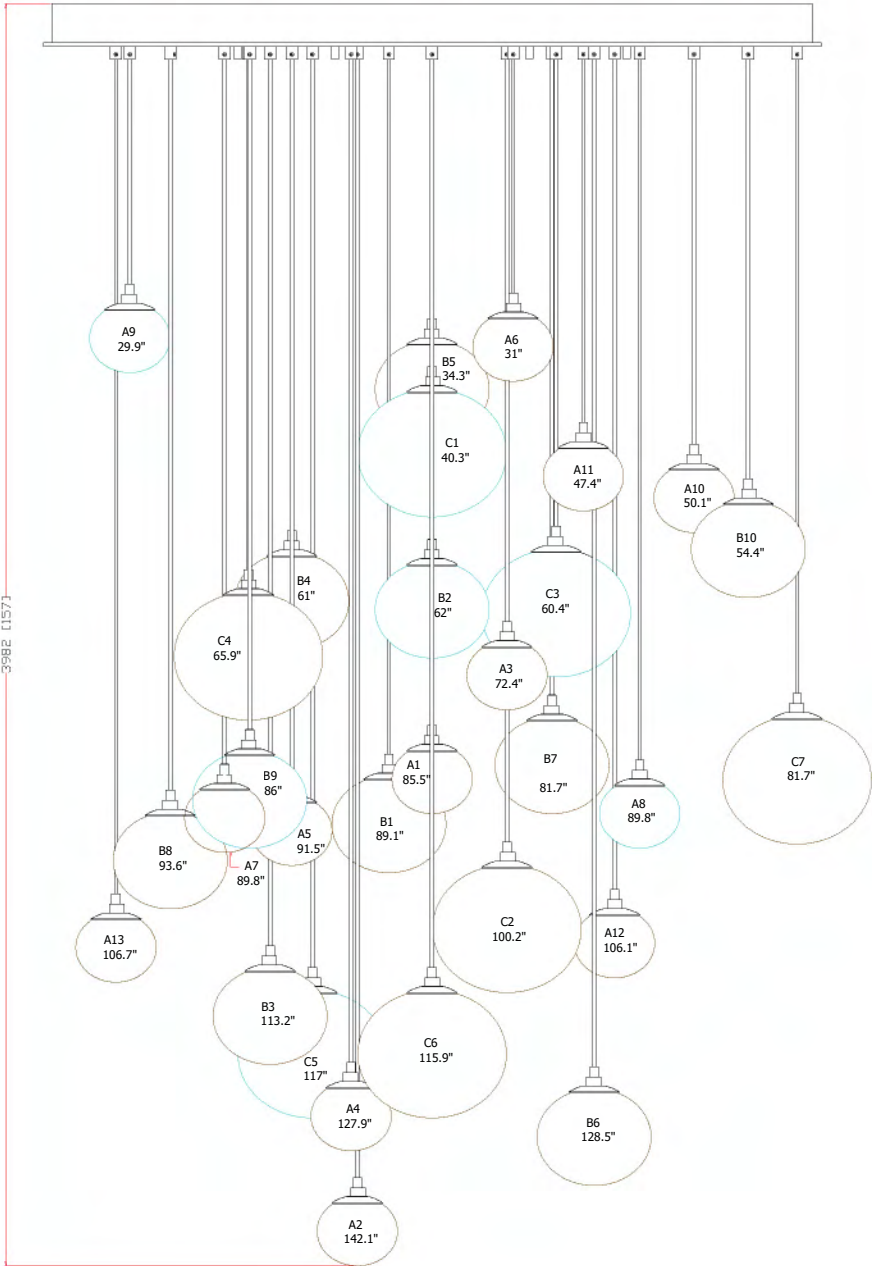

PART(S)	REPLACEMENT PART NAME	NUMBER
A	93mm BRONZE GLASS	GLS-571-29-A
B	93mm CLEAR GLASS	GLS-571-29-B
C	132mm BRONZE GLASS	GLS-571-29-C
D	132mm CLEAR GLASS	GLS-571-29-D
E	172mm BRONZE GLASS	GLS-571-29-E
F	172mm CLEAR GLASS	GLS-571-29-F