

Falmouth Outdoor Wall

CO1001, CO1012, CO1023, CO1034, CO1044 | 1.0

GENERATION LIGHTING

Wall

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 16077

800.969.3347

www.generationlighting.com


© 2020 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

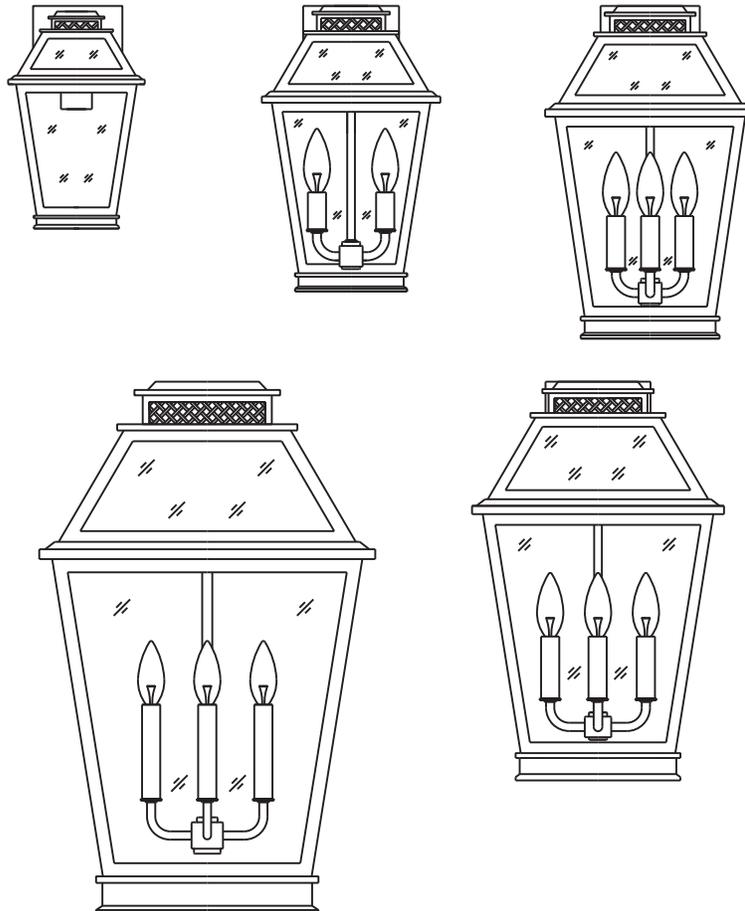

SAVE THESE INSTRUCTIONS!

Install the Fixture

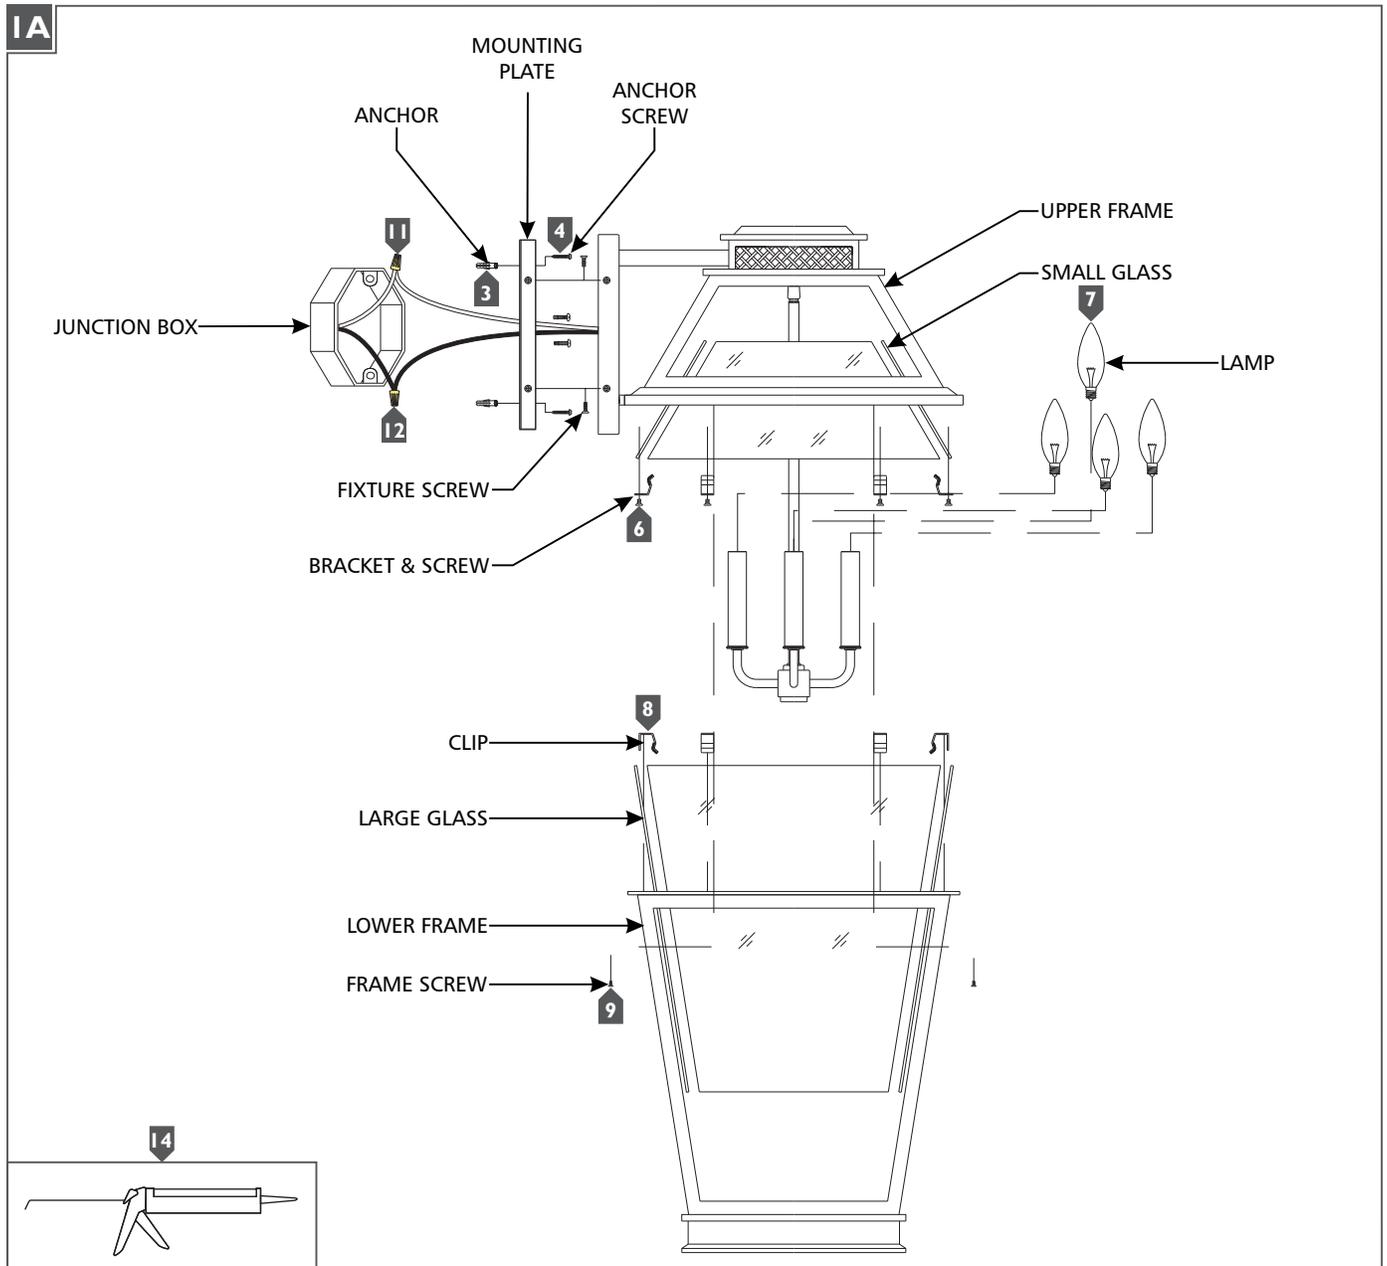

- 1** For Model CO1034 and CO1044 Only: Temporarily install the mounting plate to the junction box.
- 2** For Model CO1034 and CO1044 Only: Mark the anchor locations through the holes on the mounting plate and remove the mounting plate.
- 3** For Model CO1034 and CO1044 Only: Drill appropriate sized holes at the marked locations and install the anchors.
- 4** For Model CO1034 and CO1044 Only: Secure the mounting plate to the junction box and screw the anchors screws into the anchors. **Skip to step 6.**
- 5** Secure the mounting plate to the junction box.
- 6** Install the small glass to the upper frame and secure the glass in place using the brackets and screws.
- 7** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 8** Install the large glass to the lower frame and secure the glass in place using the clips.
- 9** Install the lower frame to the upper frame using the frame screws.
- 10** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 11** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 12** Connect the black fixture wire to the hot power line wire with a wire nut.
- 13** Neatly tuck the wiring into the junction box, place the fixture base onto the mounting plate, and secure it in place using fixture screws.
- 14** For Wet Locations: Caulk around the fixture base with waterproof construction sealant.