INSTALLATION INSTRUCTION

LEVER

WS-BATH-3-24/WS-BATH-3-36

Huxe

CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by Lumens. Substitution of parts or accessories not designated for use with this product by Lumens could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

MAINTENANCE NOTE: Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.

MISE EN GARDE: Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.

- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licensié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

ATTENTION: Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits Lumens. Remplacer des pièces ou accessoires non conçus pour ce produit Lumens pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

NOTE D'ENTRETIEN: Les conditions côtières peut causer une accumulation de minéraux et de résidue sur le luminaire. Nous recommendons aux clients qui resident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.

HARDWARE

A




Wire Connector
Qty: 3 pcs

B



Mounting Ring
Qty: 1 pc

C



Conversion Plate
Qty: 1 pc

D



Assembly Screw
Qty: 2 pcs + 1 Extra

E



Allen Wrench
Qty: 1 pc

F



Allen Screw
Qty: 2 pcs + 1 Extra

INSTALLATION INSTRUCTION
LEVER
WS-BATH-3-24/WS-BATH-3-36

Huxe

FIG. 1 MOUNT ON SWITCH BOX

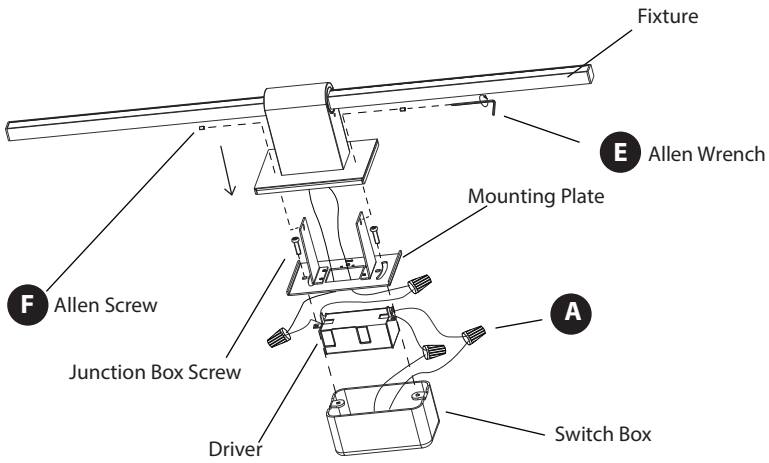


FIG. 2 MOUNT ON JUNCTION BOX



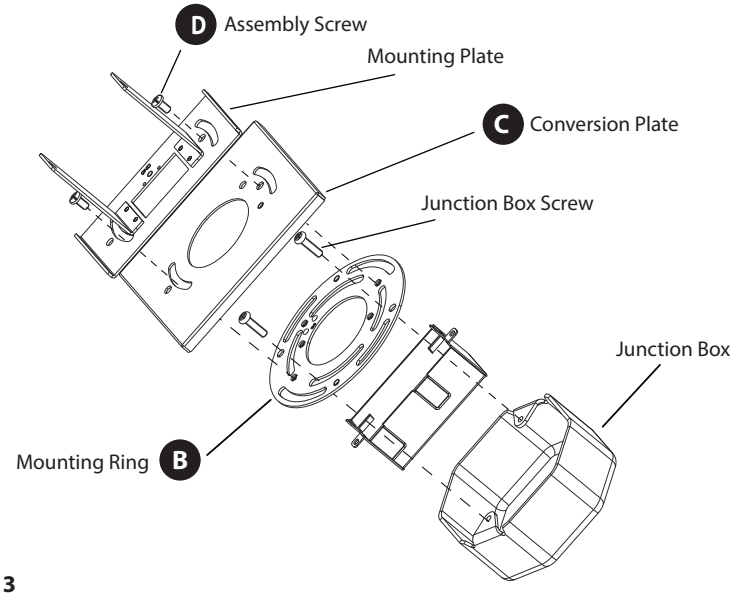


FIG. 3

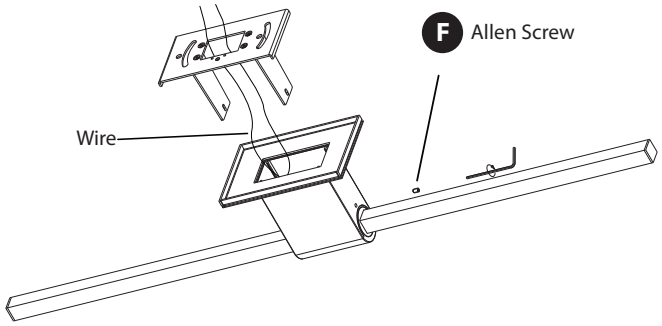

Back Plate Dimensions

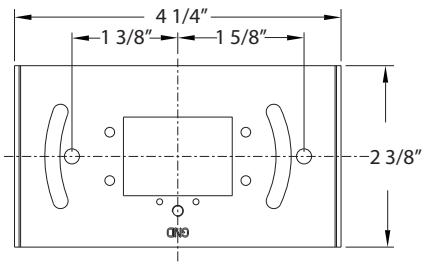

INSTALLATION INSTRUCTION
LEVER
WS-BATH-3-24/WS-BATH-3-36

Huxe

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

INSTALLATION

MOUNT ON SWITCH BOX (Fig. 1)

3. Remove the allen srew (F) from the fixture.
4. Connect the driver input wire to switch box wires as shown in Fig. 4, making sure that all wire connectors (A) are secured.
   If your outlet box has a green or bare cooper ground wire, connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the back plate using the screw provided. After wires are connected, tuck them carefully inside the switch box.
   ***Requires Driver to be recessed within the switch box.**
5. Secure the mounting plate to the junction box using the screws provided with the junction box.
   Note: (i) using any other non-original-manufacturer provided junction box screw may result in safety issue;
   (ii) The side of the mounting plate marked "GND" must face out.
6. Place the fixture over the mounting plate, and secure it with allen srew (F).

OR

MOUNT ON JUNCTION BOX (Fig. 2)

3. Remove the allen srew (F) from the fixture.
4. Connect the driver input wire to junction box wires as shown in Fig. 4, making sure that all wire connectors (A) are secured.
   If your outlet box has a green or bare cooper ground wire, connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the back plate using the screw provided. After wires are connected, tuck them carefully inside the switch box.
   ***Requires driver to be recessed within the junction box.**
5. Secure the mounting ring to the junction box using the screws provided with the junction box. Make sure the two holes (Spacing 2-3/4") are horizontal as shown in Fig. 2.

Note: (i) using any other non-original-manufacturer provided junction box screw may result in safety issue;
(ii) The side of the mounting plate marked "GND" must face out.

6. Secure the mounting plate and conversion plate to the mounting ring with assembly screw (D).
7. Place the fixture over the mounting plate, and secure it with allen srew (F).

***If the light plate on the surface of the lamp body bends or slides away, press it back to the lamp body or slide it to the sides.**

Fig. 4 Wiring



Fixture Wires	House Wires
Black or Smooth	Black (Hot)
Fixture Wires	**House Wires**
White or Ribbed	White (Neutral)
Fixture Wires	**House Wires**
Bare wire (Ground)	Green or Bare Copper (Ground)

本页仅用于版本控制，请勿印刷！

序号 No.	变更说明 REVISION NOTE	变更人 CHANGED BY	变更日期 REV DATE
1	修改零件包物料Modify parts package materials	朱俊驰	04/22/2024
2			
3			
4			
5			

东莞华明灯具有限公司
文控中心
04/23/2024
发 行
WAC LIGHTING (DONGGUAN) CO., LTD.

料号：7DDB093004

规格：80 克进口书写纸 A4，双面印刷，短边对折
SPECIFICATION:80G IMPORTED WRITING PAPER A4,DOUBLE-SIDED PRINTING, THE SHORT SIDE FOLDED IN HALF

图号：WSBATH3-20 B
DWG NO.

设计：朱俊驰 4/2/2024
DESIGN:

审核：
CHECK: 04/22/2024

标准化：
STD BY: 04/22/2024

批准：
APPROVED BY: 04/23/2024