

# Freeport Outdoor Wall

CO1101, CO1111, CO1121, CO1131, CO1223 | 1.0

GENERATION LIGHTING

## Outdoor

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**  
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
Use minimum 90°C supply conductors.






GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 16077

800.969.3347


[www.generationlighting.com](http://www.generationlighting.com)

© 2020 Generation Lighting. All rights reserved.  
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

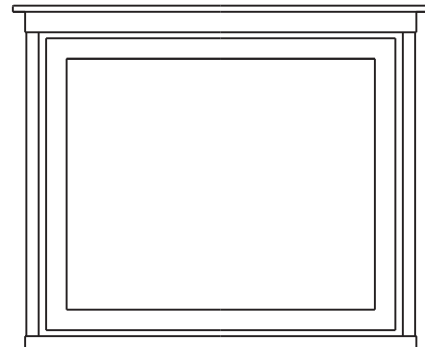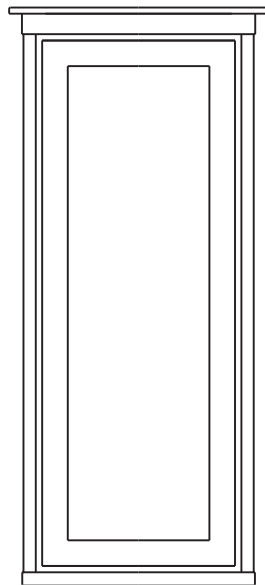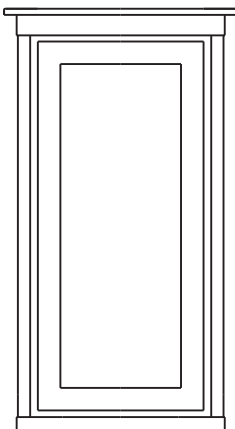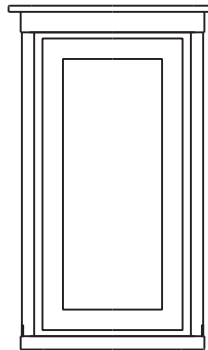

**SAVE THESE INSTRUCTIONS!**

## Install the Fixture

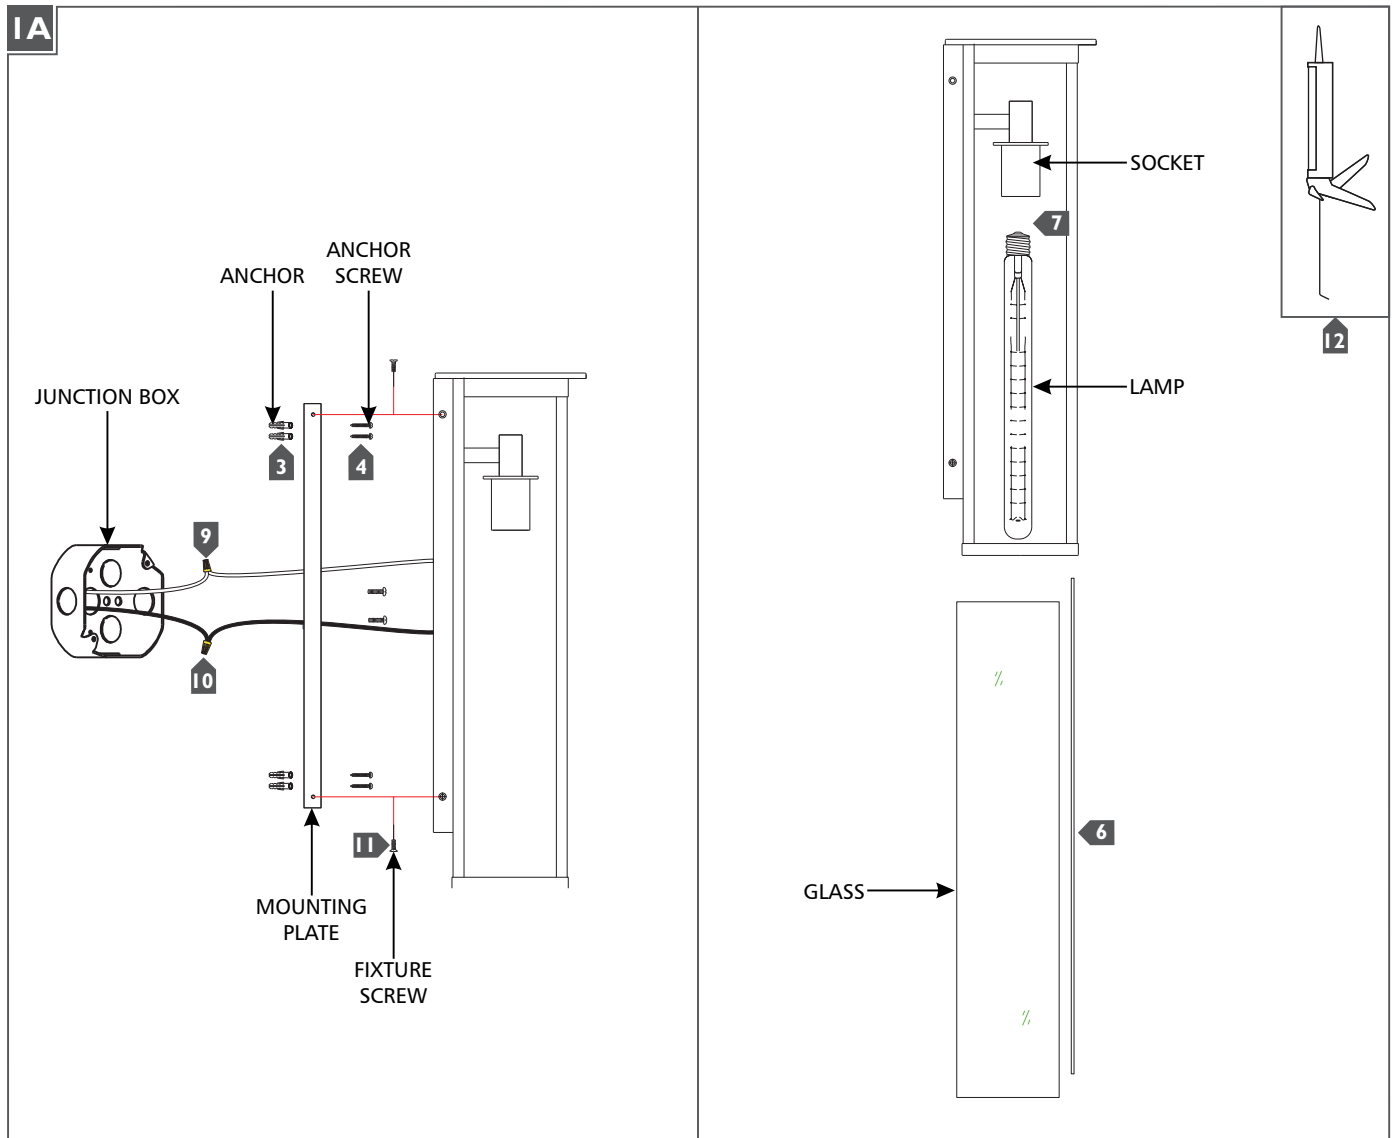

- 1** For Models CO1131 & COL1223 Only: Temporarily install the mounting plate to the junction box.
- 2** For Models CO1131 & COL1223 Only: Mark the anchor locations through the holes on the mounting plate. Remove the mounting plate.
- 3** For Models CO1131 & COL1223 Only: Drill appropriate sized holes at the marked locations and install the anchors.
- 4** For Models CO1131 & COL1223 Only: Secure the mounting plate to the junction box and screw the anchor screws into the anchors. Skip to step 6.
- 5** Secure the mounting plate to the junction box.
- 6** Install the glass by carefully inserting them into the fixture frame and bending the tabs to secure in place.
- 7** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.
- 8** Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 9** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 10** Connect the black fixture wire to the hot power line wire with a wire nut.
- 11** Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate, and secure it in place using the fixture screws.
- 12** For Wet Locations: Caulk around the fixture base with waterproof construction sealant.