

Hingham Outdoor Wall

CO1252, CO1262, CO1272 | 1.0

GENERATION LIGHTING

Outdoor

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°c supply conductors.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


www.generationlighting.com

© 2020 Generation Lighting. All rights reserved.
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

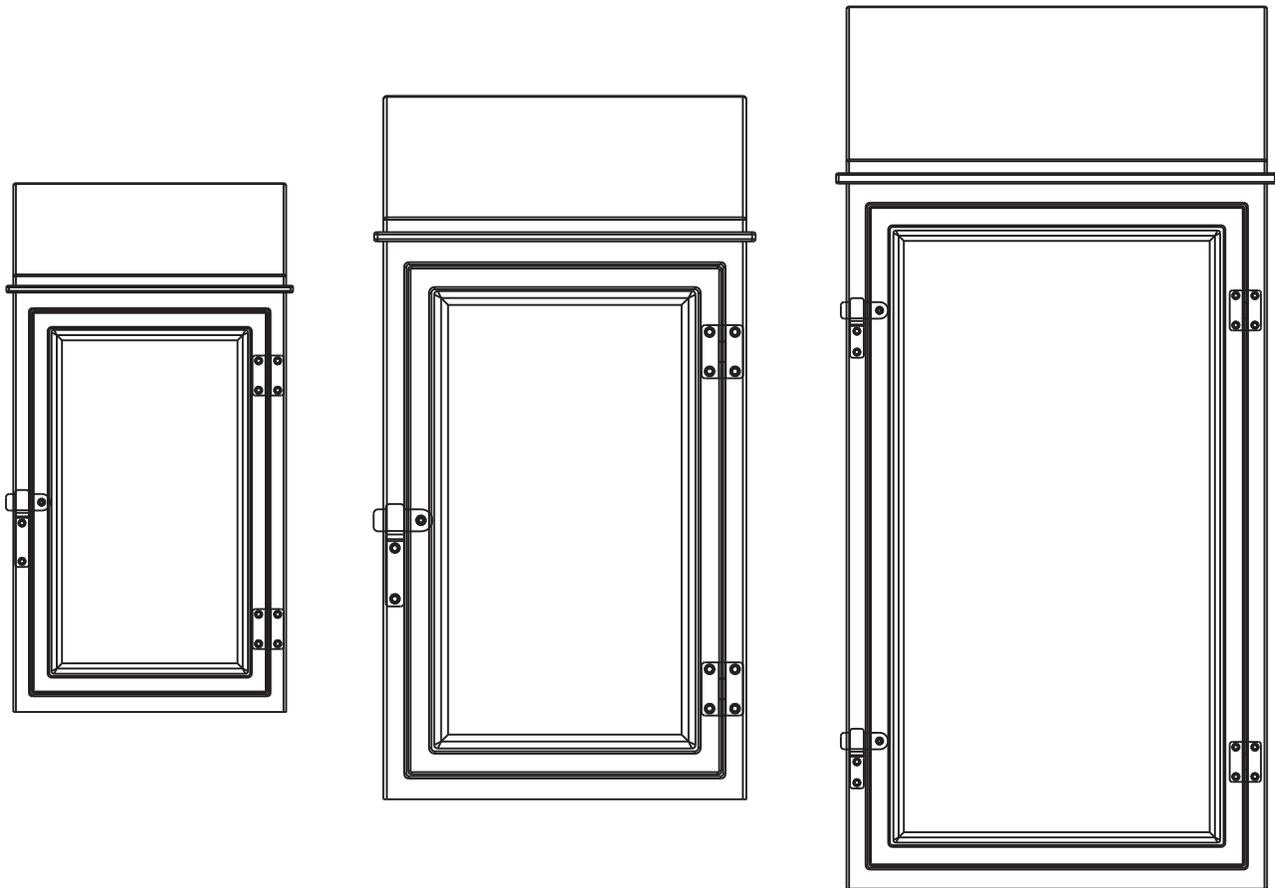

SAVE THESE INSTRUCTIONS!

Install the Fixture

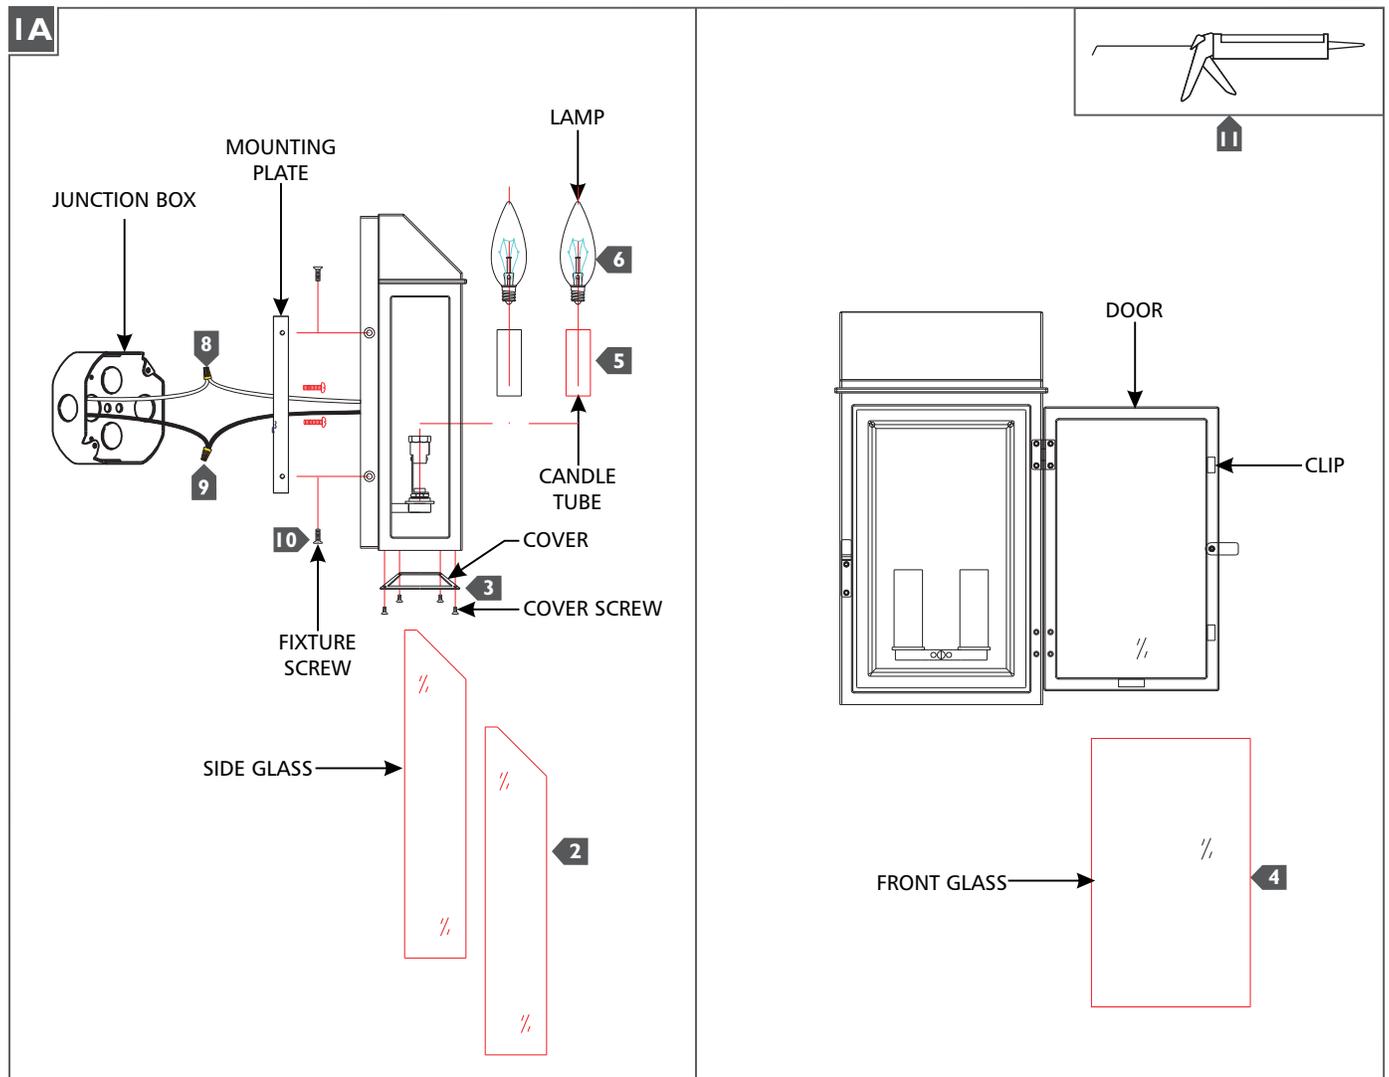

- 1** Secure the mounting plate to the junction box.
- 2** Install the side glass by carefully inserting them into the fixture frame.
- 3** Install the cover to the bottom of the fixture and secure in place using the cover screws.
- 4** Install the front glass by carefully inserting it into the door frame.
- 5** Install the candle tubes by sliding them over the sockets.
- 6** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 7** Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 8** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 9** Connect the black fixture wire to the hot power line wire with a wire nut.
- 10** Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate, and secure it in place using the fixture screws.
- 11** For Wet Locations: Caulk around the fixture base with waterproof construction sealant.