

# Summerhill Pendant

CP1344, CP1354 | 1.0

## GENERATION LIGHTING CHANDELIER

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
 Use minimum 90°C supply conductors.

**SAVE THESE INSTRUCTIONS!**

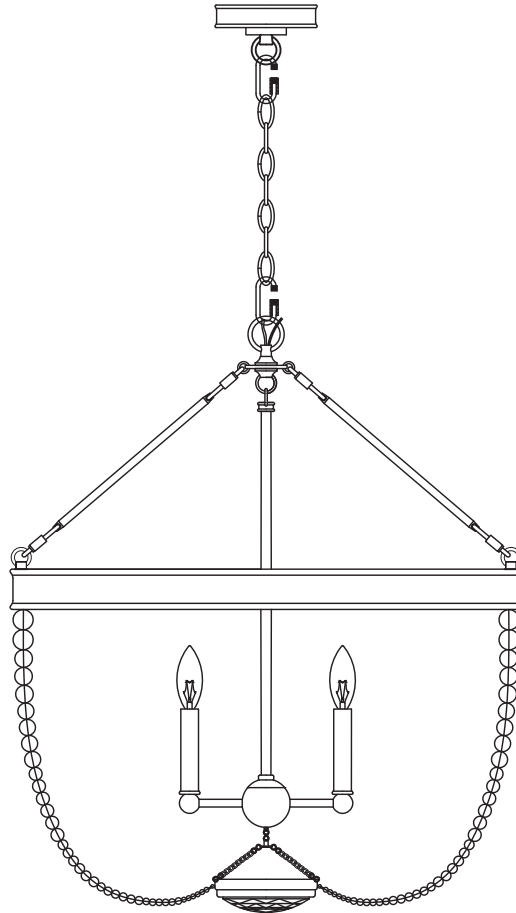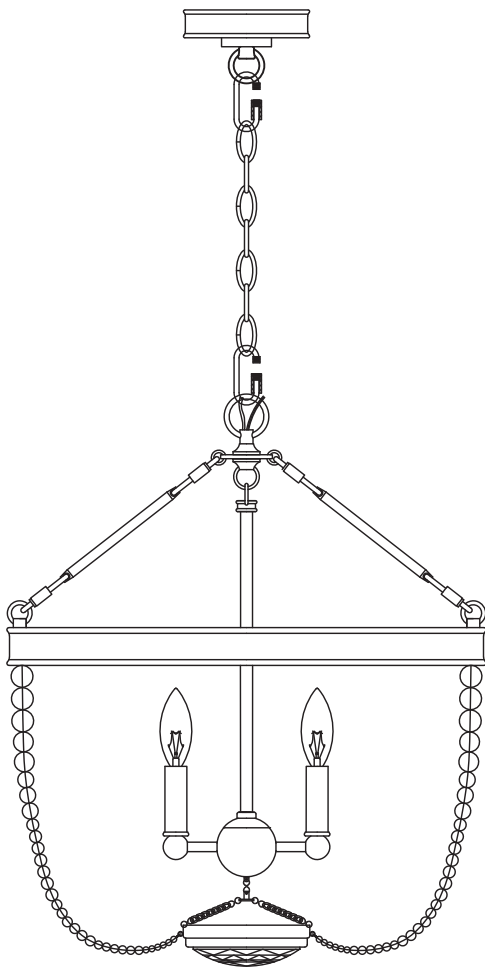

GENERATION LIGHTING  
 7400 Linder Ave., Skokie, IL 60077  
 T 847.410.4400 | F 847.410.4500  
[www.generationlighting.com](http://www.generationlighting.com)

# Install the Fixture

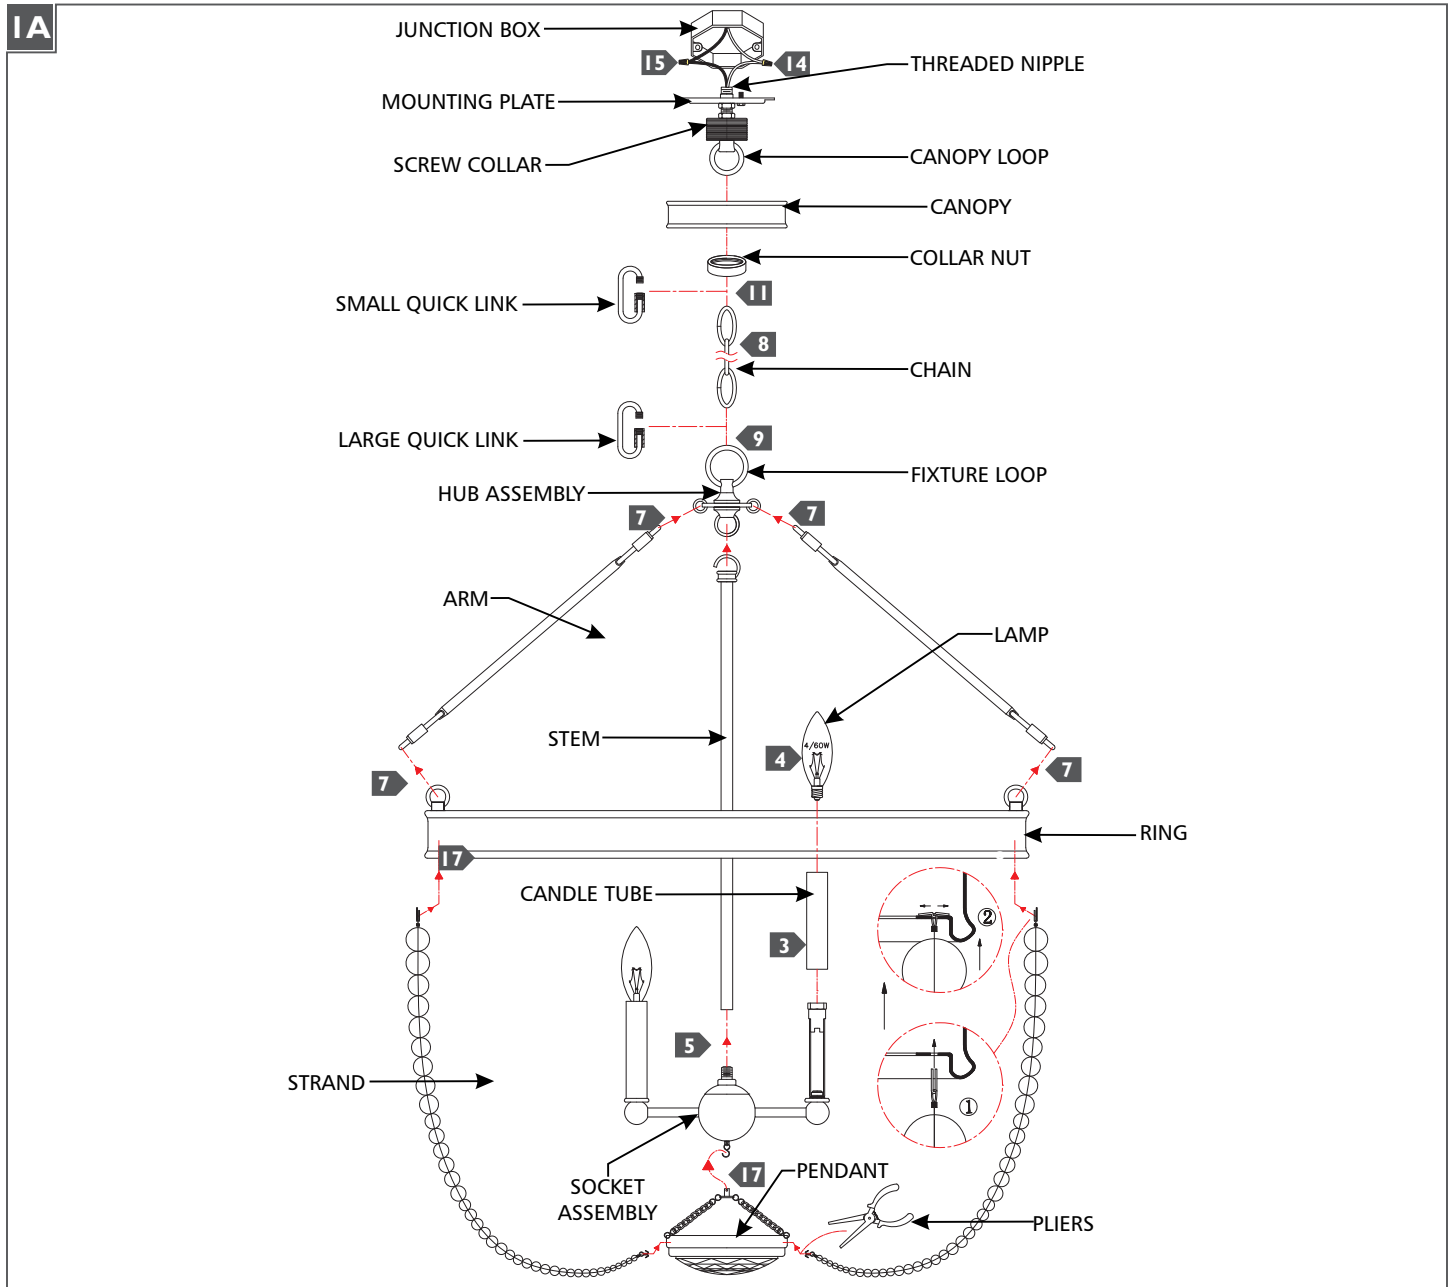

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate, then screw the screw collar and canopy loop onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** Install the candle tubes by sliding them over the sockets.
- 4** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 5** Insert the stem into the ring, then feed the fixture wires through the stem and screw it onto the socket assembly.
- 6** Feed the fixture wires through the hub assembly then attach it onto the stem.
- 7** Attach one arm to the ring and the other end to the hub assembly. Repeat as necessary.
- 8** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 9** Install the large quick link to bottom end of the chain, then secure the large quick link onto the fixture loop.
- 10** Unscrew the collar nut from the screw collar, then install the collar nut and the canopy onto the chain (in that order).
- 11** Install the small quick link onto the remaining end of the chain, then secure the small quick link onto the canopy loop.
- 12** Weave the cord through the chain, collar nut, canopy, canopy loop, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 13** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 14** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 15** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 16** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 17** Install the pendant to the bottom of the ring assembly, then attach one lower strand to the pendant and the other end to the ring assembly as shown using pliers (not provided). Repeat as necessary. Note: Pliers only necessary where shown