


VELERO LARGE PENDANT

KP1201

General Product Information



Suggested/Required Tools

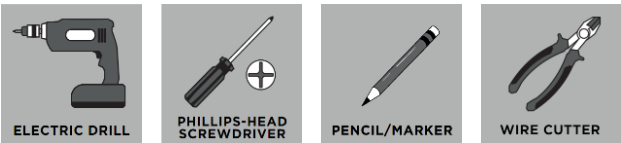


Safety Information


**CAUTION-RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**USE MINIMUM 90°C SUPPLY CONDUCTORS.**

 Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

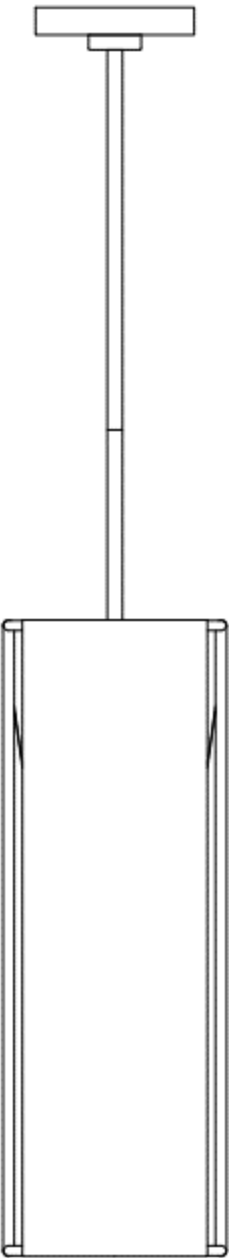

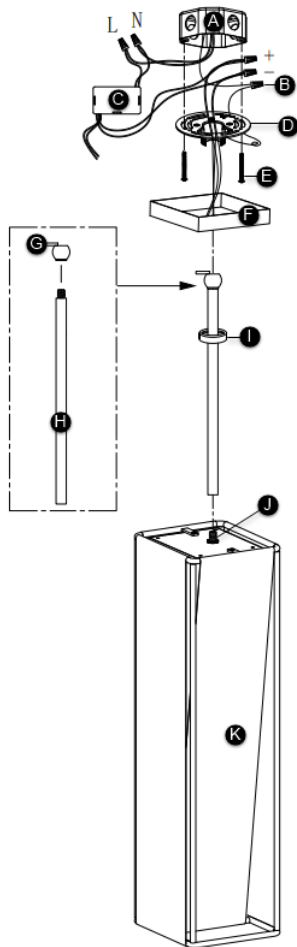

## FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate with Screw Collar
- E. Mounting Screws
- F. Canopy
- G. Half Ball Assembly
- H. Stem Assembly
- I. Collar Nut
- J. Fixture Top with Nipple
- K. Fixture Shade

## INSTRUCTIONS

### I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the pendant.
2. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together.
3. Feed the fixture wires through the stem assembly, collar nut, canopy, and half ball assembly.
4. Screw the stem assembly on top of the fixture.
5. Then screw the half ball assembly onto the stem assembly.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Neutral driver wire to neutral power line wire
  - b) Hot driver wire to hot power line wire
3. Ensuring the driver output wires are accessible, secure the mounting plate with screw collar to the junction box using the mounting screws.
4. Slide the half ball assembly onto the screw collar portion of the mounting plate.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Negative driver wire to negative fixture wire
  - b) Positive driver wire to positive fixture wire
7. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
8. Carefully tuck all the wires behind the mounting plate into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the mounting plate with screw collar and secure it in place by screwing the collar nut tightly onto it.