


(LUMN) SUSPENSION 15W+7,5W LED  
(CACU)  
(TS) 22,5W LED (TOLU) 1807

(CAP) AIR SO  
(IDNM) 2023000068-069 / MILAB  
(PLA)

## POLAR DIAGRAM (cd/klm)

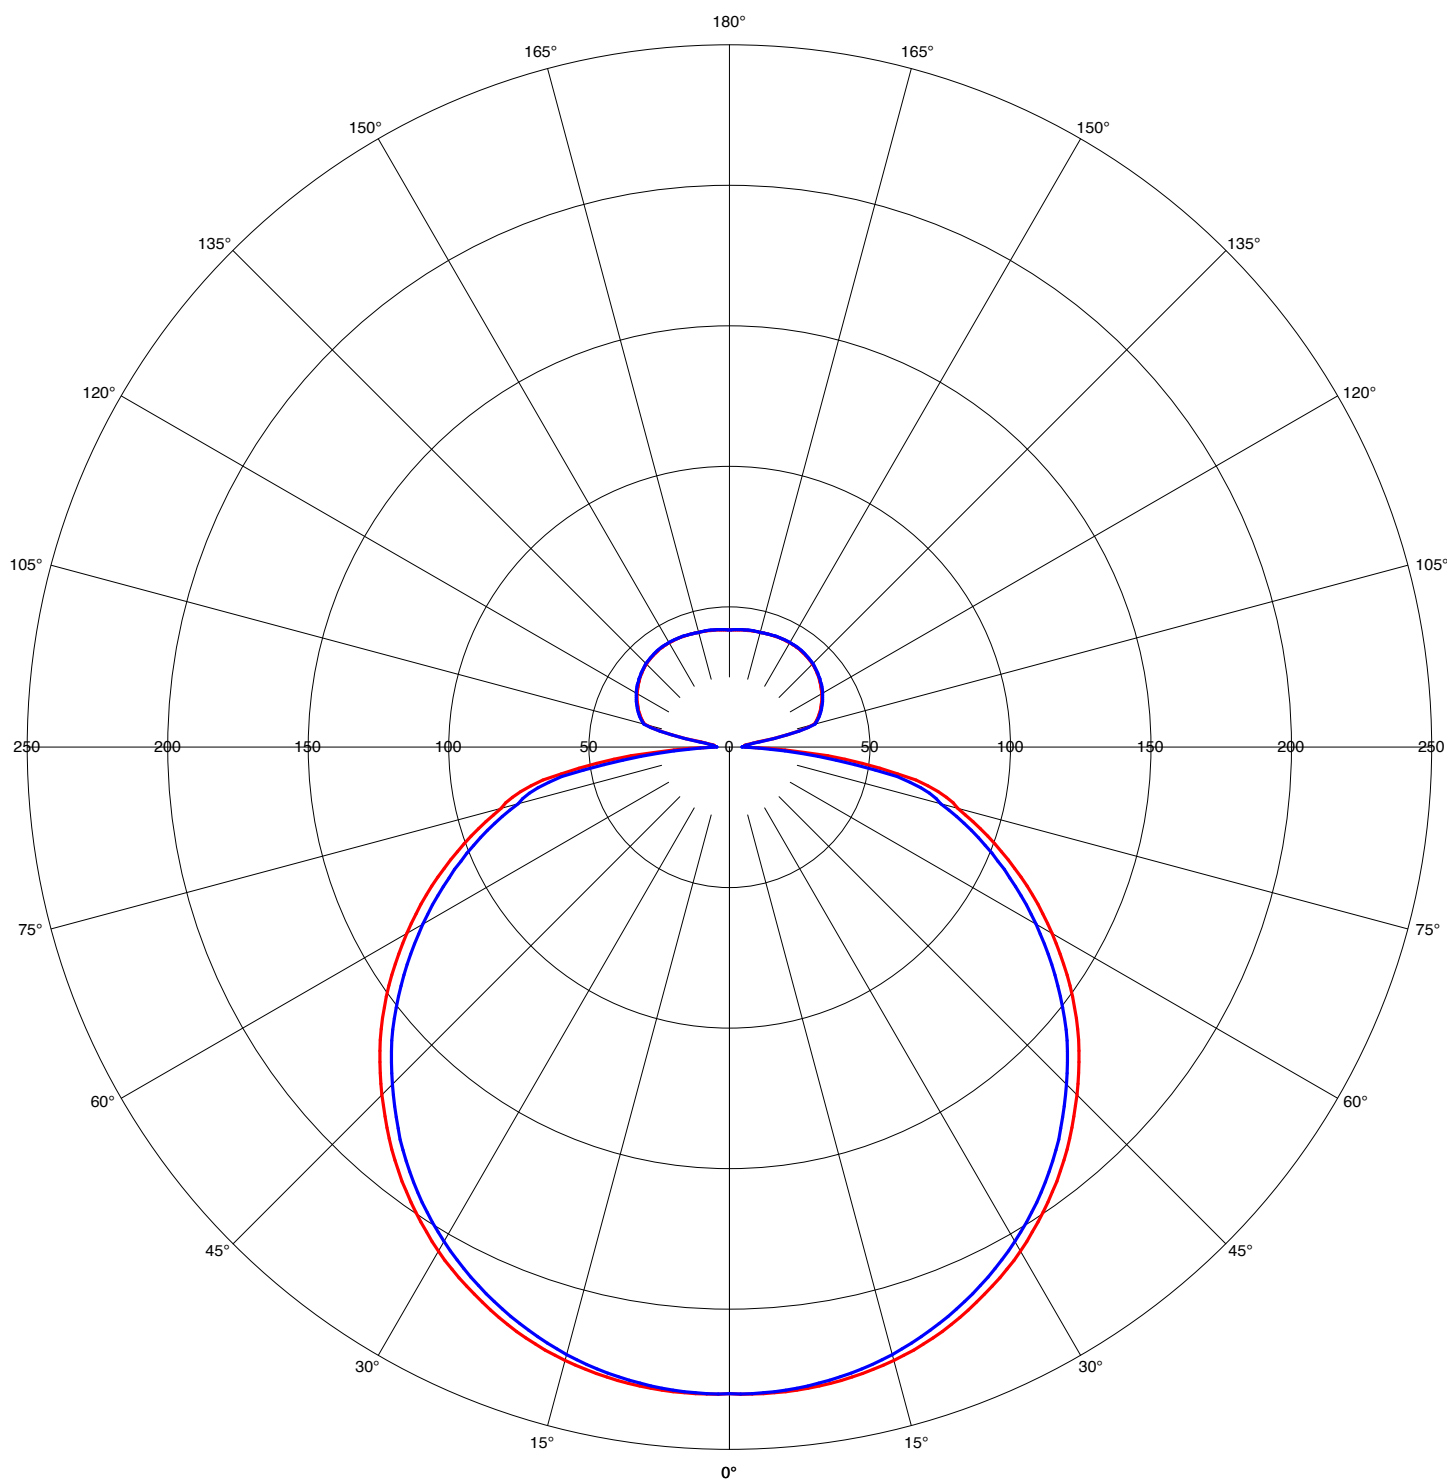

C = 0-180° 90-270°

CIE code: 41 71 91 80 100  
Performance: LOR = 100,0; DLOR = 80,1; ULOR = 19,9  
Beam opening: C0-180 = 130,0°; C90-270 = 126,0°  
Asymmetry: IMax = 230,4 cd/klm; C = 0,0°; range = 3,0°  
Orientation: 0° - Incline: 0° - Rotation: 0°