

cerno®



DESIGNED AND MADE IN CALIFORNIA

Redeo Pendant




4 ft, walnut/brushed brass



4 ft, white washed oak/brushed brass



4 ft, dark stained walnut/distressed brass

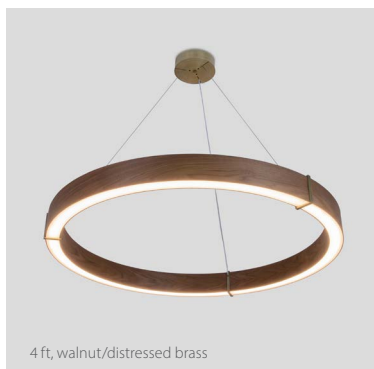


4 ft, walnut/distressed brass



walnut/distressed brass

Redeo pendant

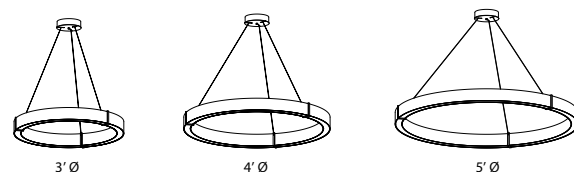

Dimensions:
3: 3' Ø, 3.5" H - **4:** 4' Ø, 3.5" H - **5:** 5' Ø, 3.5" H
 Product weight:
3: 15 lbs - **4:** 20 lbs - **5:** 24 lbs
 Light source: integrated LED
 Light output:
3: 4539 Lumens (source)
4: 4568 Lumens (source)
5: 4586 Lumens (source)
 Light color: 2700 K, 3000 K, or 3500 K
 Color accuracy: 90+ CRI
 Power usage: 36 W
 Driver housed inside canopy
 Driver dimensions: 4.07" x 1.03" x .93"
 Dimmable (see driver option)
 Wood grain will vary
 Specifications subject to change




MATERIAL & FINISH OPTIONS

Redeo pendant part # 06-390-



Size	
3 ft	3
4 ft	4
5 ft	5
Ring Finish Combinations	
walnut (CM-001) / brushed brass (CM-120)	WR
walnut (CM-001) / distressed brass (CM-117)	WD
dark stained walnut (CM-002) / distressed brass (CM-117)	DD
white washed oak (CM-095) / brushed brass (CM-120)	OR
Lamping	
2700 K LED	27
3000 K LED	30
3500 K LED	35
Driver Option	
AC Input Voltage Range: 120-277 V	
120 V input: TRIAC, ELV & 0-10 V dimmable	P1
240 & 277 V input: only 0-10 V dimmable	

The skilled hands of the woodworkers on our team bring each Redeo ring to life. The wood body is strong and built to last generations. The standard offering comes in 3, 4, and 5-foot diameters. The thoughtful attention to detail and personal touch that goes into making each Redeo is how this fixture blurs the lines between a hand-crafted work of art and a functional pendant. We always say that we cannot design better than nature, and the beautiful natural wood grain is another aspect of the design that feels equal parts raw and refined.

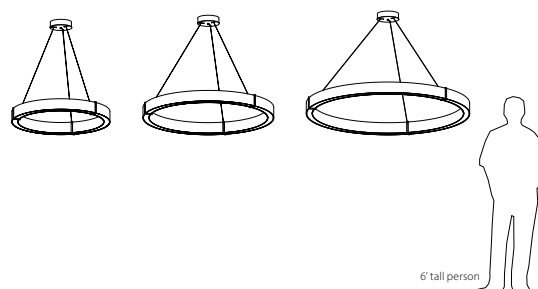

6' tall person

⚠ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

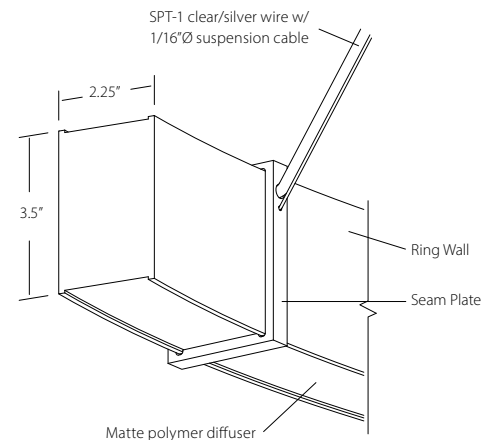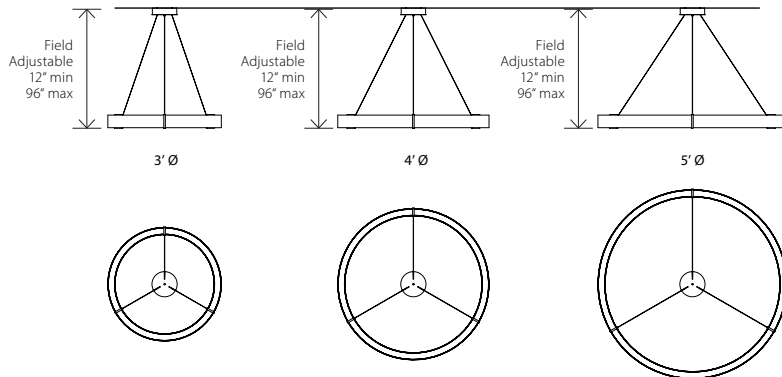


All Redeo pendants have 3 seam plates and suspension cables.

TECHNICAL SPECIFICATIONS

Light source: integrated LED
 Light output:
 3ft: 4539 Lumens (source)
 4ft: 4568 Lumens (source)
 5ft: 4586 Lumens (source)
 Light color: 2700 K, 3000 K, 3500 K, or 4000 K
 Color accuracy: 90+ CRI
 Input Voltage: 120-277 V AC
 Power usage: 36 W
 Driver housed inside canopy
 Canopy dimensions: 8.0' Ø x 2.1"
 Driver dimensions: 4.07" x 1.03" x .93"
 Dimmable (see driver option)
 Suspension Details:
 1/16" aircraft cable with cable grip suspension hardware included
 See elevation views for minimum drop lengths
 96" maximum drop length, field adjustable
 Suspension cable angles not to be less than 30 degrees from horizontal
 Canopies match seam plate finish
 The Redeo is built in 3 sections.
 The 3' diameter ships assembled and the 4' and 5' diameter is assembled on site
 Specifications subject to change



PHOTOMETRIC POLAR GRAPH

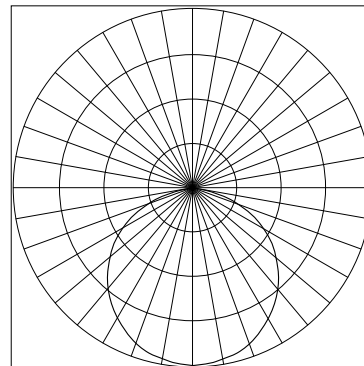

3ft

Maximum Candela = 830.75
 Located at Horizontal Angle = 180,
 Vertical Angle = 5°

4ft


Maximum Candela = 843.93
 Located at Horizontal Angle = 180,
 Vertical Angle = 5°

5ft


Maximum Candela = 857.13
 Located at Horizontal Angle = 180,
 Vertical Angle = 5°

Output specifications shown for 3000K CCT and walnut ring with brushed brass accents for vertical plane through 0-180 degree horizontal angles. Other CCTs and material finishes may cause output specifications to vary.

FINISHES




walnut (CM-001)




dark stained walnut (CM-002)



white washed oak (CM-095)



brushed brass (CM-120)



distressed brass (CM-117)

WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov