




DCW éditions

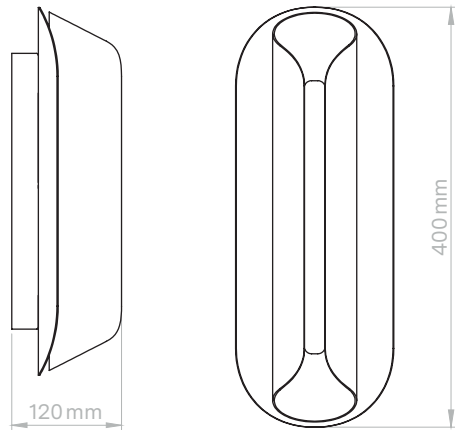

Finitions Corps Body Finishings



DCW Refs DCW Refs

ROSALIE W 2700K GOL	3700677655653
ROSALIE W 2400K NK	3700677667458
CASAMBI CONTROLLER 110-240 50-100W	3700677662293
DALI CONVERTER TRIAC2DALI 110-240 200W	3700677662866
DRIVER 110-240 20W CC250-700 DALI 140*45*27	3700677661401

ROSALIE

Julie Fullet et Emeric Thienot (light designer)

Typologie
Typology

Applique
Wall lamp

Usage
Use

Intérieur
Indoor

Tension
Voltage

220-240V

Indice de protection
Protection index

IP20

Classe
Class

1

Puissance
Power

12W

Source Lumineuse
Light Source

LED intégrée 2700K, gradable
Integrated LED 2700K, dimmable

Température de couleur
Color Temperature

NK : 2400K - GOL : 2700K
NK : 2400K - GOL : 2700K

Flux Lumineux
Light Flux

1200lm (valeur nominale)
1200lm (nominal value)

Driver
Light Flux

Driver interne intégré 85x40,4x22 mm - 700mA
Gradable TRIAC
Integrated driver supplied 85x40,4x22 mm - 700mA - TRIAC dimmable

Gradation
Dimming

Oui, TRIAC
Yes, TRIAC

Câble
Wire

Non
No

Interrupteur
Switch

Non
No

Fiches
Plug

Non
No

Matériaux
Materials

Aluminium
Aluminium

Poids Net
Net Weight

1,8 kg

Poids Brut
Gross Weight

2,5 kg

Emballage
Packaging

470x210x160 mm

Marquages
Marks



EPREL
EPREL

2035067

Options
Options

CASAMBI via contrôleur
CASAMBI with controller

DALI via convertisseur ou DALI avec driver dédié
DALI with converter or DALI with dedicated driver

