


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: IRIS CEILING and WALL 60	TYPE:LED灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:D600	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA      Eff: 38.15 lm/W			
MODEL		I <sub>max</sub> (cd)	484.2	S/MH (C0/180)	1.27
NOMINAL POWER (W)	38	LOR (%)	100.0	S/MH (C90/270)	1.25
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1414.4	UP, DN (C0-180)	0.0, 49.6
NOMINAL FLUX (lm)	1414.38	CIE CLASS	DIRECT	UP, DN (C180-360)	0.0, 50.4
LAMPS INSIDE	1	up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	219.3	down (%)	100.0	CIBSE SHR MAX	1.35

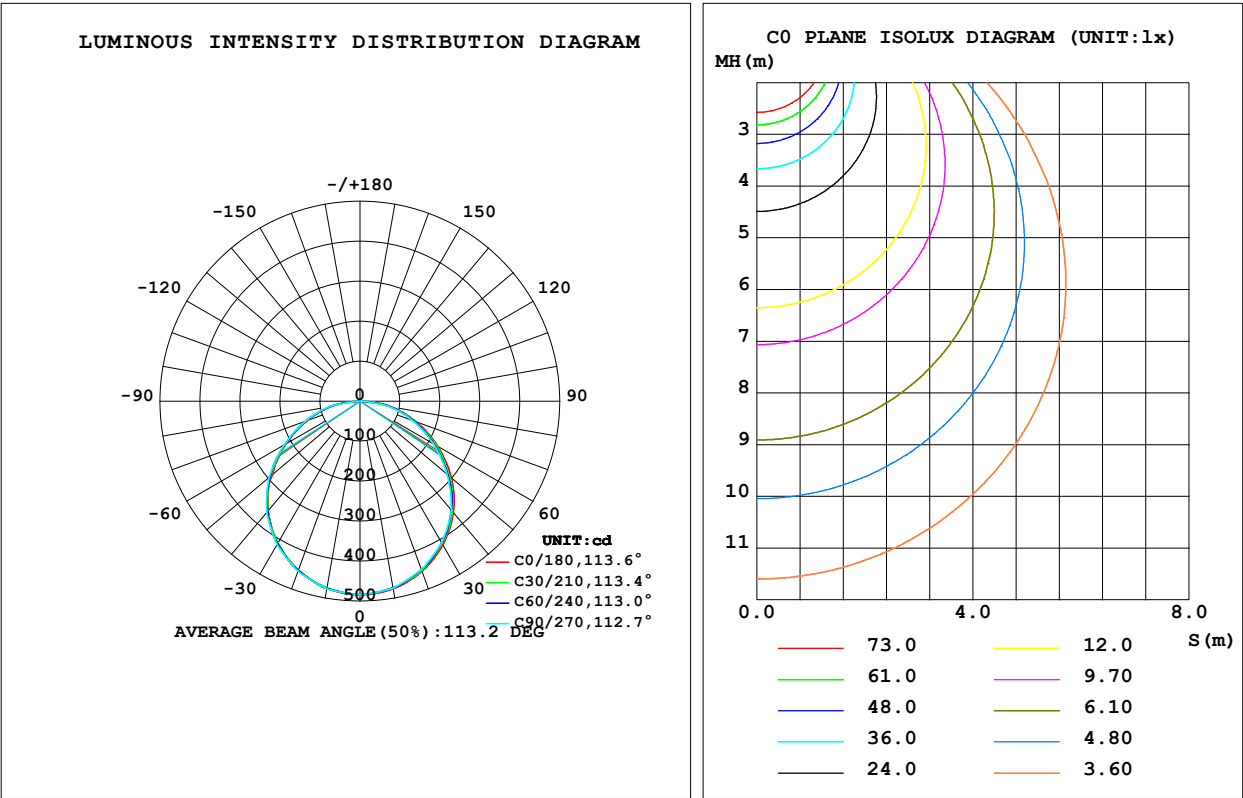

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: ZHAIWW  
Test Date: 2024-06-18

Range: 0 - 90DEG  
Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity: 65.0%  
Test Distance: 9.750m [K=1.0000]  
Remarks: