

WAC LIGHTING

Reed

Picture Light 3000K

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-11017 17"	3000K	BK Black BN Brushed Nickel	18W	569	380

Example: **PL-11017-BN**

For custom requests please contact customs@waclighting.com

DESCRIPTION

The perfect complement to any display piece. Conserves fine art while providing superior color rendering.

FEATURES


- Light source rotates 150 degrees
- Simple, elegant slim profile design
- Conversion plate for 4" J box included.
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver concealed within the canopy
- 5 Year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-10%,TRIAC: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum hardware with acrylic diffuser



FINISHES:



LINE DRAWING:

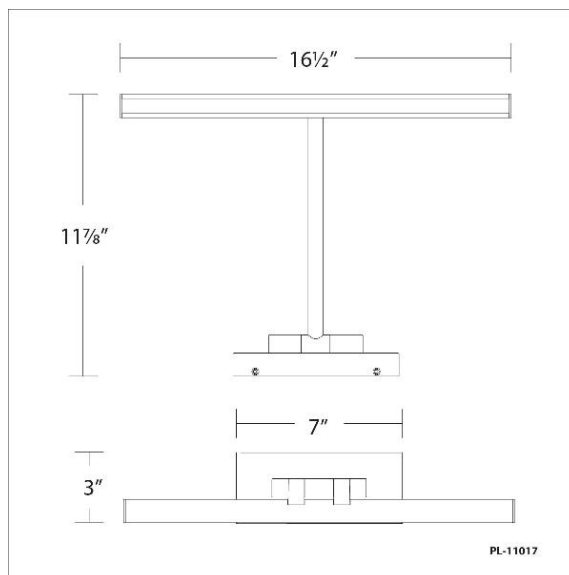

WAC LIGHTING

Reed

Picture Light 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-11025 25"	3000K	BK Black BN Brushed Nickel	21W	825	544

Example: **PL-11025-BN**

For custom requests please contact customs@waclighting.com

DESCRIPTION

The perfect complement to any display piece. Conserves fine art while providing superior color rendering.

FEATURES


- Light source rotates 150 degrees
- Simple, elegant slim profile design
- Conversion plate for 4" J box included.
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver concealed within the canopy
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-10%,TRIAC: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL
	Damp Location Listed
Construction:	Aluminum hardware with acrylic diffuser




FINISHES:



Black

Brushed
Nickel

LINE DRAWING:

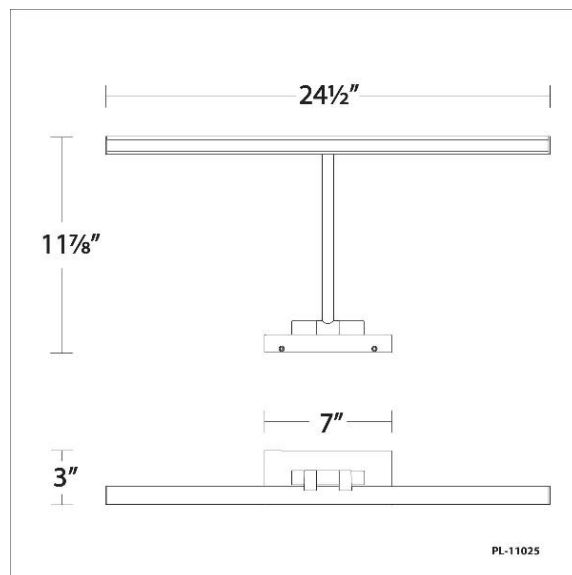

WAC LIGHTING

Reed

Picture Light 3000K

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-11033 33"	3000K	BK Black BN Brushed Nickel	28W	1072	747

Example: **PL-11033-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The perfect complement to any display piece. Conserves fine art while providing superior color rendering.

FEATURES


- Light source rotates 150 degrees
- Simple, elegant slim profile design
- Conversion plate for 4" J box included.
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver concealed within the canopy
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-10%,TRIAC: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL
	Damp Location Listed
Construction:	Aluminum hardware with acrylic diffuser




FINISHES:



Black

Brushed
Nickel

LINE DRAWING:

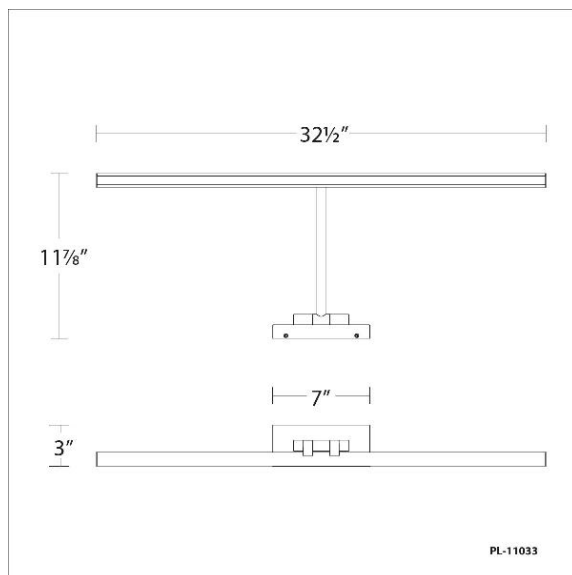

WAC LIGHTING

Reed

Picture Light 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-11042 42"	3000K	BK Black BN Brushed Nickel	30W	1618	1000

Example: **PL-11042-BN**

For custom requests please contact customs@waclighting.com

DESCRIPTION

The perfect complement to any display piece. Conserves fine art while providing superior color rendering.

FEATURES


- Light source rotates 150 degrees
- Simple, elegant slim profile design
- Driver conceals within the canopy
- Conversion plate for 4" J box included.
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver concealed within the canopy
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-10%,TRIAC: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL
	Damp Location Listed
Construction:	Aluminum hardware with acrylic diffuser




FINISHES:



Black

Brushed
Nickel

LINE DRAWING:

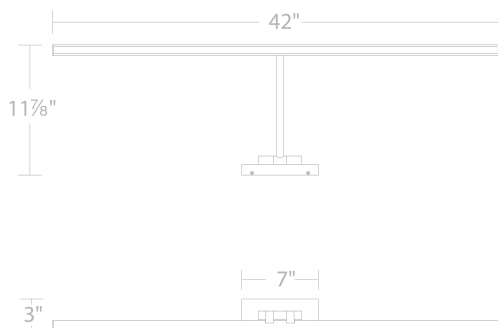

PL-11042