

# Tik

bollard light



## Table of contents

1. Product Overview	Page 2
2. Finishes & Materials	Page 2
3. Light Source & Dimming	Page 2
4. Installation	Page 3
5. Photometric Data & Technical Information	Page 3
6. Ordering Codes	Page 4
7. Certifications & Standards	Page 5
8. Maintenance & Cleaning	Page 5

## Versions



TIK\_4098X  
Page 4



TIK\_4099X  
Page 4

---

# Tik

## bollard light

---

### 1. Product Overview

Metallic outdoor bollard light available in two heights: 19.1/2" and 31.5/8". Features a PMMA lens diffuser (60° beam angle) and integrated LED, providing direct light. The cylindrical tube encloses the light source and it is non-adjustable.

The remote driver must be installed in an IP65-rated box or indoors. Maximum cable length between driver and bollard: 55 ft.

Double-layer coating ensures high resistance to corrosion and maritime environmental conditions.



---

### 2. Finishes & Materials



88 Grey Stone  
89 Pale Green  
96 Anthracite

---

### 3. Light Source & Dimming

#### Lamping

LED 6.2W (2700K / Ang. 60° / >90 CRI / 350mA) 120V / Typ 725 lumens

Optic lens: (PMMA) lens diffuser 60°.

\*Integrated LED module (included).

#### Dimming options:

Standard: TRIAC

# Tik

bollard light

## 4. Installation

Built-in driver for direct connection

Surface-mounted on a solid base (concrete or similar).  
Not suitable for installation on soil or grass.



60° beam angle


Acrylic optic. It provides diffused uniform illumination and it is visible as a decorative light line when seen from the side.



## 5. Photometric Data & Technical Information

Photometric data corresponds to the output of each individual lamp.  
Access to photometric files in download area.

2D / 3D / BIM Files available. Access to files in download area here.

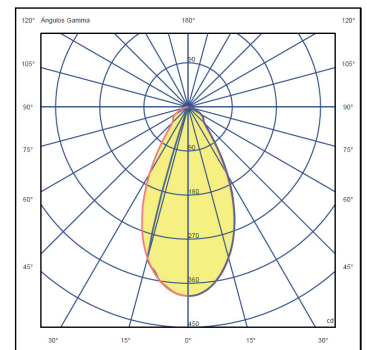

# Tik

## bollard light

### 6. Ordering Codes

Lamping 4098X

LED 6.2W (2700K / Ang. 60° / >90 CRI / 350mA)

120V / Typ 725 lumens

Optic lens: (PMMA) lens diffuser 60°

DIM: TRIAC

Finishes:

88 Grey Stone

89 Pale Green

96 Anthracite



Drawing	Mounting	Setting	Finish Body	Ordering Code
TIK_4098X IP65 	Bollard light. Hard wired (no plug). Surface mounted on a solid base.	Outdoor	Grey Stone	TIK_4098X_88W
		Outdoor	Pale Green	TIK_4098X_89W
		Outdoor	Anthracite	TIK_4098X_96W

Lamping 4099X

LED 6.2W (2700K / Ang. 60° / >90 CRI / 350mA)

120V / Typ 725 lumens

Optic lens: (PMMA) lens diffuser 60°

DIM: TRIAC

Finishes:

88 Grey Stone

89 Pale Green

96 Anthracite



Drawing	Mounting	Setting	Finish Body	Ordering Code
TIK_4099X IP65 	Bollard light. Hard wired (no plug). Surface mounted on a solid base.	Outdoor	Grey Stone	TIK_4099X_88W
		Outdoor	Pale Green	TIK_4099X_89W
		Outdoor	Anthracite	TIK_4099X_96W

## 7. Certifications & Standards



Warranty: 1 year  
100% made in Spain

Estiluz products are guaranteed against manufacturing defect for one year from date of delivery. Estiluz products with integral LED modules and drivers are guaranteed against manufacturing defects for five years from date of delivery. This guarantee is limited to replacement of defective material and does not include any labor, expenses or damages contingent or incidental thereto. This warranty does not apply to products damaged due to accident, tampering, misuse or abuse.

---

## 8. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.