





Measurements

Surface

M

A: 230/9.06° A1: 145/5.71° F: ø1320/52°

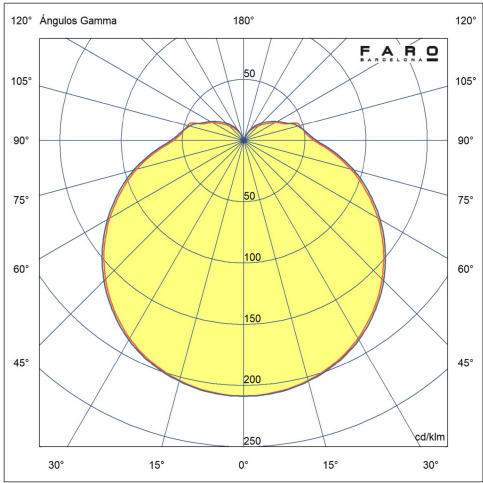

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	18
Energy class light source	E
Light source	SMD LED
Lifespan	25.000h
Luminous Flux (lm)	678
Color temperature (K)	3000/ 4200/ 6500K
Opening angle degrees	120
Light orientation	Direct
CRI	>80
Suitable for seaside areas	No
Structure material	ABS
Diffuser material	Glass
Blade material (fan blades)	ABS
Structure finish	Matt White
RAL/Pantone structure	RAL 9016
Diffuser finish	Opal
Blade finish	Matt White
Motor type	DC
Fan power (W)	5-7-9-13-19-28
RPM	90-115-135-158-185-210
Airflow (m³/min)	80-102-125-143-165-177
Airflow (CFM)	2877-3662-4485-5118-5924-6318
Sound intensity (dBA)	39-40-44-47-51-54
Number of blades	3
Type of control included	Remote control with timer
Fan programming hours	1-4-8h
Optional rod model	No dispone

↓ Installation instructions

↓ Energy label

↓ Photometric



Related accessories



White wall controller for DC fan with dimmable light

Reference	33987
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	ABS + Glass



Black wall controller for DC fan with dimmable light

Reference	33988
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	ABS + Glass



White remote control

Reference	34303
IP	20
Structure material	ABS





Black remote control

Reference	34304
IP	20
Structure material	ABS



