



#### Measurements


##### Surface

##### L

A: 270/10.63" A1: 200/7.87" F: ø1320/52"

##### S

A: 270/10.63" A1: 200/7.87" F: ø900/35.4"





##### Recessed

##### L

A: 210/8.27" A1R: 140/5.51"

##### S

A: 210/8.27" A1R: 140/5.51"

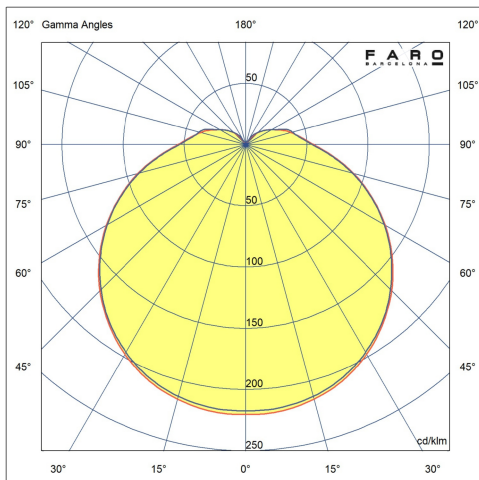

|                             |                               |
|-----------------------------|-------------------------------|
| Mounting                    | Ceiling                       |
| Voltage (V)                 | 220V-240V                     |
| Hertz                       | 50/60Hz                       |
| Class                       | I                             |
| IP                          | 20                            |
| Power (W)                   | 10                            |
| Energy class light source   | E                             |
| Light source                | SMD LED                       |
| Lifespan                    | 50.000h                       |
| Luminous Flux (lm)          | 550                           |
| Color temperature (K)       | 2700/ 3000/ 4000K             |
| Opening angle degrees       | 135                           |
| Light orientation           | Direct                        |
| CRI                         | 80                            |
| Control System              | TRIAC                         |
| Structure material          | Steel                         |
| Diffuser material           | Glass                         |
| Blade material (fan blades) | Pine Wood                     |
| Structure finish            | Matt Black                    |
| RAL/Pantone structure       | RAL 9005                      |
| Diffuser finish             | Opal                          |
| Blade finish                | Dark Walnut                   |
| Motor type                  | DC                            |
| Fan power (W)               | 4-5-7-13-22-32                |
| RPM                         | 58-75-94-124-152-173          |
| Airflow (m³/min)            | 55-71-96-119-151-174          |
| Airflow (CFM)               | 1983-2557-3447-4269-5397-6234 |
| Sound intensity (dBA)       | 29-30-31-33-39-43             |
| Number of blades            | 3                             |
| Maximum tilt (°)            | 12                            |
| Type of control included    | Remote control with timer     |
| Fan programming hours       | 1-4-8h                        |
| Rod diameter                | 26                            |
| Optional rod model          | Universal 26mm                |



Installation instructions



Energy label



Photometric



Related accessories



White wall controller for DC fan with dimmable light

|                    |             |
|--------------------|-------------|
| Reference          | 33987       |
| Voltage (V)        | 100V-240V   |
| Hertz              | 50/60Hz     |
| IP                 | 20          |
| Structure material | ABS + Glass |



Black wall controller for DC fan with dimmable light

|                    |             |
|--------------------|-------------|
| Reference          | 33988       |
| Voltage (V)        | 100V-240V   |
| Hertz              | 50/60Hz     |
| IP                 | 20          |
| Structure material | ABS + Glass |



Wall controller white rf applique 6 speeds

|                    |           |
|--------------------|-----------|
| Reference          | 34306     |
| Voltage (V)        | 100V-240V |
| Hertz              | 50/60Hz   |
| IP                 | 20        |
| Structure material | ABS       |





Wall controller black rf applique 6 speeds

|                    |           |
|--------------------|-----------|
| Reference          | 34307     |
| Voltage (V)        | 100V-240V |
| Hertz              | 50/60Hz   |
| IP                 | 20        |
| Structure material | ABS       |



