


Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	8
Light source	E27 LED
Bulb format	A60
Number of lamp holders	1
Lifespan	40.000h
Power factor	0.6
Color temperature (K)	3000K
Opening angle degrees	60
Light orientation	Direct-Indirect
Tilt angles	90
Rotation angles 2	355
Photobiological risk	1
Power reader (W)	3
Color temperature reading light (K)	3000K
Reading light lumens (lm)	180
Reading light beam angle	60
CRI	>90
Supply current	700 mA
Switch type	On/Off
Structure material	Aluminium
Shade material	Textile
Diffuser material	Textile
Structure finish	Black
Shade finish	Grey
Diffuser finish	Grey
Reader finish	Black

[Download](#) Installation instructions

[Download](#) Photometric

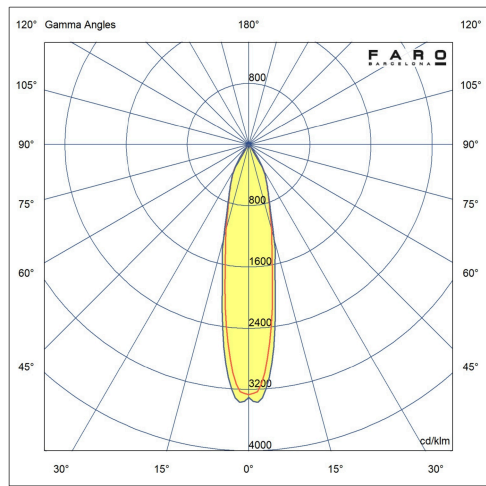

Recommended bulbs



Bulb A60 MATE LED E27 8W 3000K CRI90	
Reference	17529
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	810
Color temperature (K)	3000K
Opening angle degrees	360



Bulb A60 MATE LED E27 8W 2200K CRI90	
Reference	17528
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	650
Color temperature (K)	2200K
Opening angle degrees	360

