





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	15
Energy class light source	G
Light source	E27 LED
Number of lamp holders	1
Power reader (W)	3
Color temperature reading light (K)	3000K
Reading light lumens (lm)	191
Reading light beam angle	45
Switch type	On/Off
Structure material	Steel
Shade material	Rattan
Structure finish	Matt Black
Shade finish	Rattan

↓ Installation instructions

↓ Energy label

↓ Photometric

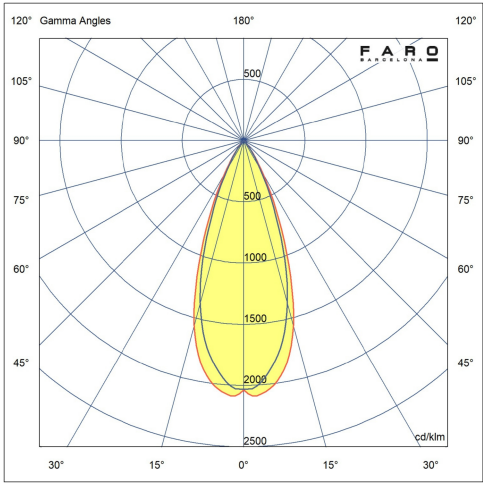

Recommended bulbs



Bulb ESPHERICAL FILAMENT LED E27 4W 2700K

Reference	17426
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	4
Luminous Flux (lm)	400
Color temperature (K)	2200K
Opening angle degrees	360

Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

