





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	A60
Number of lamp holders	1
Power factor	0.43
Opening angle degrees	28
Light orientation	Direct
Tilt angles	90
Rotation angles 2	355
Power reader (W)	3
Color temperature reading light (K)	3000K
Reading light lumens (lm)	177
Reading light beam angle	24
CRI	87
Supply current	700 mA
Switch type	On/Off
Structure material	Steel
Shade material	Textile
Structure finish	Matt Black
Shade finish	Black
Reader finish	Matt Black



Installation instructions

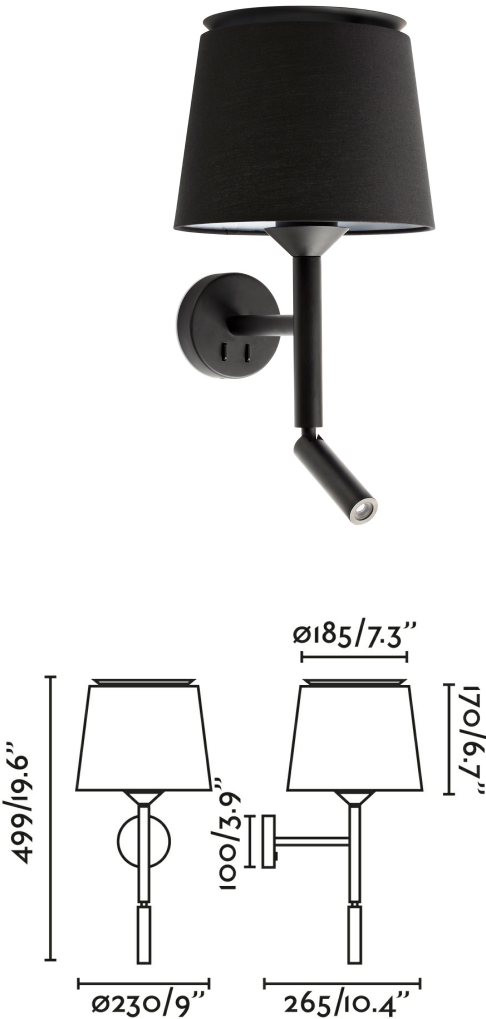

Photometric

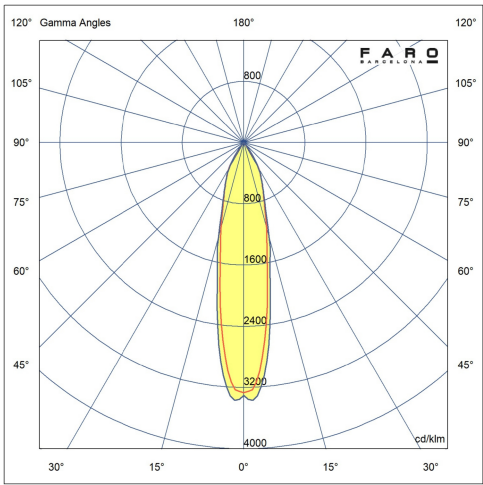

Recommended bulbs



Bulb A60 MAT LED E27 8W 2700K 640Lm

Reference	17463
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360

Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360



