


|                        |             |
|------------------------|-------------|
| Mounting               | Ceiling     |
| Voltage (V)            | 100V-240V   |
| Hertz                  | 50/60Hz     |
| Class                  | II          |
| IP                     | 20          |
| Power (W)              | 15          |
| Light source           | E27 LED     |
| Bulb format            | G45         |
| Number of lamp holders | 3           |
| Light orientation      | Direct      |
| Cable length           | 2000 mm     |
| Structure material     | Steel       |
| Shade material         | Steel       |
| Structure finish       | Satin Black |
| RAL/Pantone structure  | RAL 9005    |
| Shade finish           | Gloss White |



Installation instructions

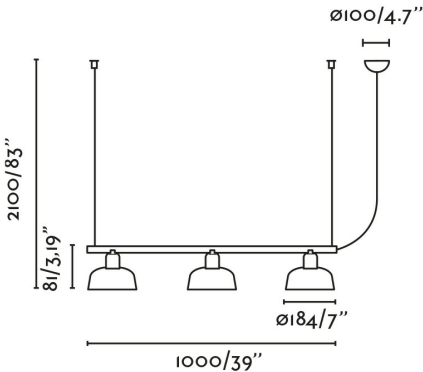

Recommended bulbs



|                                     |           |
|-------------------------------------|-----------|
| Bulb G45 MAT LED E27 4W 2700K 450LM |           |
| Reference                           | 17462     |
| Voltage (V)                         | 220V-240V |
| Hertz                               | 50/60Hz   |
| Power (W)                           | 4         |
| Luminous Flux (lm)                  | 400       |
| Color temperature (K)               | 2700K     |
| Opening angle degrees               | 360       |



|                                          |           |
|------------------------------------------|-----------|
| Bulb G45 E14 MATE LED 4,5W 2700K DIMABLE |           |
| Reference                                | 17519     |
| Voltage (V)                              | 220V-240V |
| Hertz                                    | 50/60Hz   |
| Power (W)                                | 4,5       |
| Luminous Flux (lm)                       | 400       |
| Color temperature (K)                    | 2700K     |
| Opening angle degrees                    | 360       |



|                                          |           |
|------------------------------------------|-----------|
| Bulb G45 E14 MATE LED 4,5W 2700K DIMABLE |           |
| Reference                                | 17519     |
| Voltage (V)                              | 220V-240V |
| Hertz                                    | 50/60Hz   |
| Power (W)                                | 4,5       |
| Luminous Flux (lm)                       | 400       |
| Color temperature (K)                    | 2700K     |
| Opening angle degrees                    | 360       |