

## Bellhop Unplugged


Designed by Edward Barber and Jay Osgerby, 2018



2W - 87lm - 2200-2700-3000K - CRI> 90

Portable table lamp emitting direct light. Features a polycarbonate (PC) base and dome with an opaline, injection-moulded, photo-engraved PC diffuser. The base houses a push-button switch with 4-step dimming, 3-step colour temperature selection and a battery status indicator. Provides up to 24 hours of use. IP54 protection rating for outdoor use. Rechargeable via USB-C. Charging cable included.

Originally designed in 2016 as a bespoke table light for the Parabola restaurant and members' room at the Design Museum in London, Bellhop has since become a contemporary essential. Created for everyday use in any setting, its iconic bell-shaped diffuser evokes the warm glow of a modern-day candle, bringing soft, atmospheric light wherever needed.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607080801       |
| Mounting               | Portable            |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Number of lamps        | 1                   |
| Power (W)              | 2                   |
| Source flux (lm)       | 87                  |
| Lumen Output (lm)      | 87                  |

### Physical

|                     |              |
|---------------------|--------------|
| Colour              | Glossy Green |
| Length (mm)         | 125          |
| Net weight (kg)     | 0.75         |
| Package height (mm) | 200          |
| Package width (mm)  | 200          |
| Package length (mm) | 330          |
| Package volume (m3) | 0.01         |
| IP internal         | 54           |

### Download

[Mounting instructions](#)  PDF

### Photometric Files

[LDT / IES](#)  LDT


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

|                          |                |
|--------------------------|----------------|
| Lighting type            | Direct         |
| Light distribution       | Roto symmetric |
| CCT (K)                  | 2200-2700-3000 |
| CRI>                     | 90             |
| LED Life / Failure Ratio | 30000          |
| Extreme cut off          | No             |

Electrical


|                            |                   |
|----------------------------|-------------------|
| Insulation class           | III               |
| Frequency (Hz)             | 50/60             |
| Main voltage (Vac)         | 5                 |
| Power supply               | Remote excluded   |
| Dimmable                   | Yes               |
| Dimming interface          | Dimmer Integrated |
| Induction recharge Qi      | No                |
| Batteries inside           | Yes               |
| Battery type               | LI-IO             |
| Charging cycles guaranteed | 1000              |
| Charging min time          | 4                 |
| Charging socket/connector  | USB-C             |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class C




Non-replaceable light source



Replaceable control gear by an end-user

Spare Parts

01. Bellhop TW Battery pack RF38035

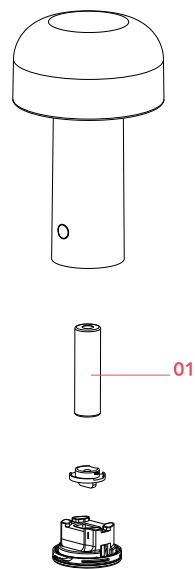

(\*) The battery kit is only compatible with the new "TW" models. It is not backward compatible with older product versions.



RF38035

Bellhop TW Battery pack