
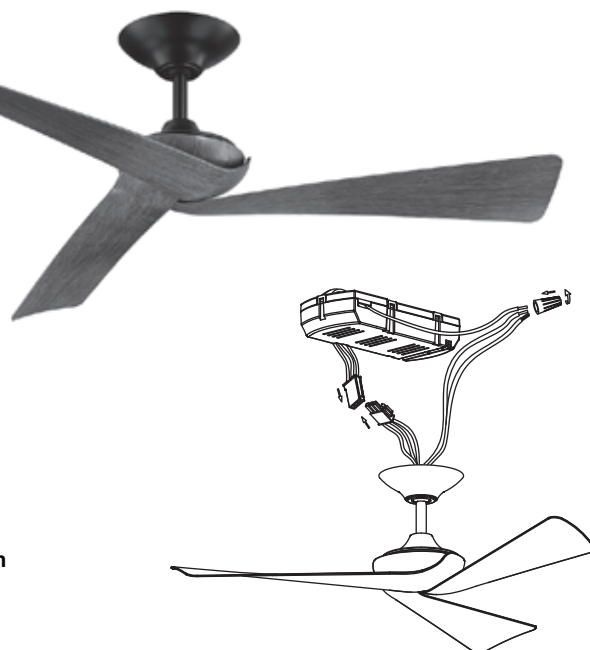


YOGI™

FPD6658**

52" Ceiling Fan

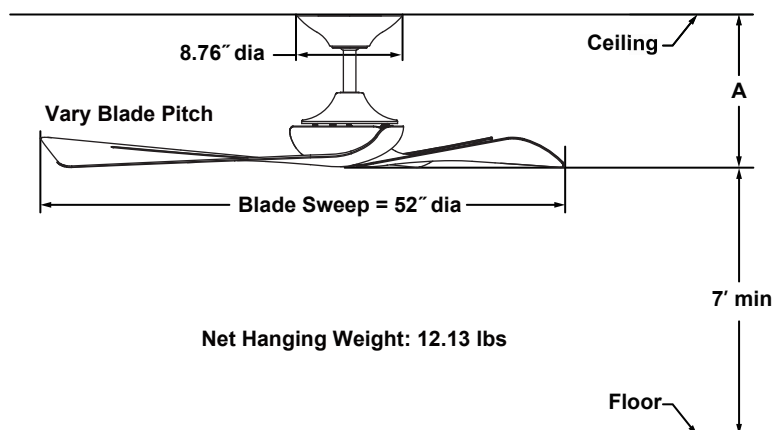

featuring KwikWire easy connection

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC125 x 20 sensorless DC motor is designed for optimal performance with this fan.

BLADE SET:

A set of three 26" composite blades is included.

CONTROL OPTIONS:

A WiFi receiver and TR360 hand-held remote control are included. Push button remote control with 6 fan speeds, fresh air, reverse, fan timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW406 wall control is available— sold separately. Instructions are provided with each control.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room up to 400 sq ft.

	A
Fan w/6" downrod	12.68"
Fan w/12" downrod	18.68"
Fan w/18" downrod	24.68"
Fan w/24" downrod	36.68"
Fan w/36" downrod	48.68"
Fan w/48" downrod	60.68"
Fan w/60" downrod	72.68"
Fan w/72" downrod	84.68"

Available Finishes	
BL	Black with Black Blades
BLK	Black with KOA Blades
BSN	Brushed Satin Brass with Natural Blades
MW	Matte White with Matte White Blades

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	150	4721	177	0.38	27
Med (9 th)	109	3431	386	0.14	9
Low (1 th)	48	1279	490	0.05	3

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
18	3108	5	168

Fan Velocity (FPM)	
High Speed Velocity	Average Velocity
448	287